


SHARP SERVICE MANUAL

SX0L9LC-15A2E

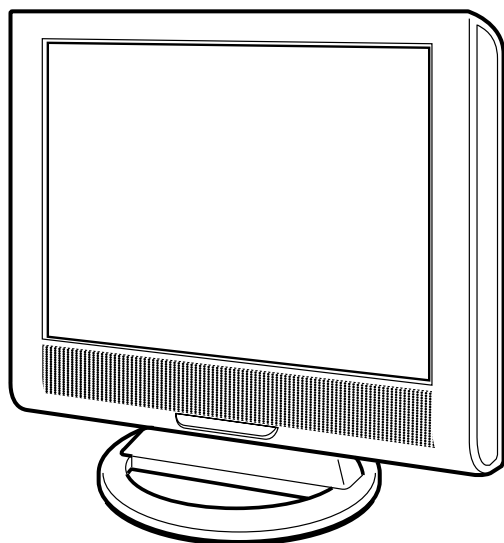

LCD COLOUR TELEVISION

MODEL LC-15A2E

In the interests of user-safety (Required by safety regulations in some countries) the set should be restored to its original condition and only parts identical to those specified be used.

CONTENTS

	Page
• IMPORTANT SERVICE SAFETY PRECAUTION	2
• ELECTRICAL SPECIFICATIONS	3
• OPERATION MANUAL	4
• OUTLINE DIMENSION FIGURE	5
• DISASSEMBLY OF THE SET	6
• ADJUSTING PROCEDURE OF EACH SECTION	8
• TROUBLE SHOOTING TABLE	10
• CHASSIS LAYOUT	16
• BLOCK DIAGRAMS	18
• WAVEFORMS	22
• DESCRIPTION OF SCHEMATIC DIAGRAM	24
• SCHEMATIC DIAGRAMS	25
• PRINTED WIRING BOARD ASSEMBLIES	32
• PARTS LIST	
■ ELECTRICAL PARTS	37
MAIN UNIT	37
SWITCH UNIT	41
R/C UNIT	42
■ SUPPLIED ACCESSORIES PARTS	42
■ PACKING PARTS	42
■ CABINET PARTS LIST	43
■ CABINET AND MECHANICAL PARTS	44
• PACKING OF THE SET	45

IMPORTANT SERVICE SAFETY PRECAUTION

- Service work should be performed only by qualified service technicians who are thoroughly familiar with all safety checks and the servicing guidelines which follow:

WARNING

1. For continued safety, no modification of any circuit should be attempted.
2. Disconnect AC power before servicing.

CAUTION

FOR CONTINUED PROTECTION AGAINST A RISK OF FIRE REPLACE ONLY WITH SAME TYPE FUSE.
F1 (2A, 250V), F2 (1.6A, 250V), F3 (1.6A, 250V), F4 (315mA, 250V) FUSE.

BEFORE RETURNING THE RECEIVER (Fire & Shock Hazard)


Before returning the receiver to the user, perform the following safety checks:

1. Inspect all lead dress to make certain that leads are not pinched, and check that hardware is not lodged between the chassis and other metal parts in the receiver.
2. Inspect all protective devices such as non-metallic control knobs, insulation materials, cabinet backs, adjustment and compartment covers or shields, isolation resistor-capacitor networks, mechanical insulators, etc.
3. To be sure that no shock hazard exists, check for leakage current in the following manner.
 - Plug the AC cord directly into a 110~240 volt AC outlet, and connect the DC power cable into the receiver's DC jack. (Do not use an isolation transformer for this test).
 - Using two clip leads, connect a 1.5k ohm, 10 watt resistor paralleled by a 0.15 μ F capacitor in series with all exposed metal cabinet parts and a known earth ground, such as electrical conduit or electrical ground connected to earth ground.

- Use an AC voltmeter having with 5000 ohm per volt, or higher, sensitivity or measure the AC voltage drop across the resistor.
- Connect the resistor connection to all exposed metal parts having a return to the chassis (antenna, metal cabinet, screw heads, knobs and control shafts, escutcheon and etc.) and measure the AC voltage drop across the resistor.

All checks must be repeated with the AC cord plug connection reversed. (If necessary, a nonpolarized adaptor plug must be used only for the purpose of completing these checks.)

Any reading of 0.75V peak (this corresponds to 0.5 milliamp. peak AC.) or more is excessive and indicates a potential shock hazard which must be corrected before returning the monitor to the owner.

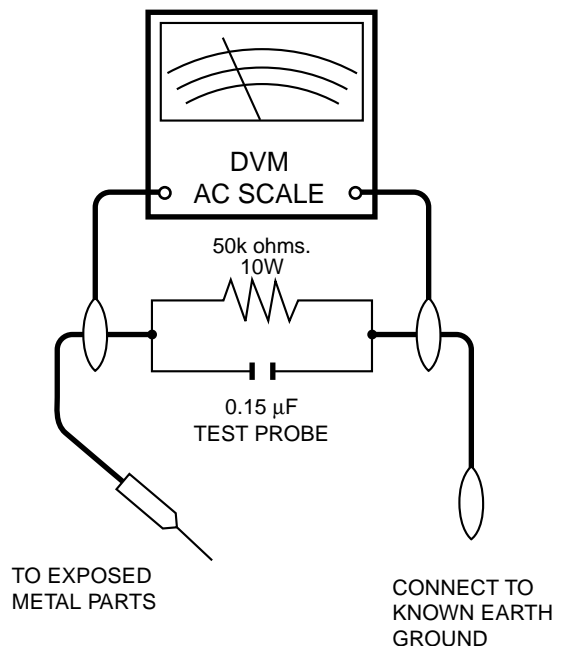

SAFETY NOTICE

Many electrical and mechanical parts in LCD television have special safety-related characteristics.

These characteristics are often not evident from visual inspection, nor can protection afforded by them be necessarily increased by using replacement components rated for higher voltage, wattage and etc.

Replacement parts which have these special safety characteristics are identified in this manual; electrical components having such features are identified by “ \triangle ”

and shaded areas in the **Replacement Parts Lists** and **Schematic Diagrams**.

For continued protection, replacement parts must be identical to those used in the original circuit.

The use of a substitute replacement parts which do not have the same safety characteristics as the factory recommended replacement parts shown in this service manual, may create shock, fire or other hazards.

ELECTRICAL SPECIFICATIONS


Items	15" LCD COLOUR TV, Model: LC-15A2E
LCD panel	15" TFT LCD
Number of pixels	921,600 dots
Video colour system	PAL/NTSC/SECAM
TV FUNCTION	
TV Standard (CCIR)	BG/DK/I/L/L'
TV Tuning System	Auto preset 100 ch.
STEREO/BILINGUAL	NICAM, IGR
AUTO PRESET	Yes
CATV	~Hyper Band
Brightness	400 cd/m ²
Lamp life	60,000 hours
Viewing angles	H: 160° V: 160°
Audio amplifier	0.6 W × 2, 2.5 W × 1
Speakers	3 × 4 cm 2 pcs., 65 mm φ 1 pc.
Terminals	
AV1	AV-IN1, S-VIDEO-IN, COMPONENT
AV2	AV-IN2/AV OUT
ANTENNA	DIN
HEADPHONE	3.5 mm φ jack (Rear)
OSD language	English/German/Dutch/French/Italian/Spanish/Swedish
Power requirement	DC 12V, AC 110 - 240 V, 50/60 Hz
Power consumption	27W (Connected to DC12V)
Weight	3.9 kg(approx.), incl. stand, excl. accessories
Accessories	R/C, Batteries, AC adapter, AC cord, Operation manual, Cable clamp

<i>Specifications are subject to change without prior notice.</i>

OPERATION MANUAL

Controls

Front view

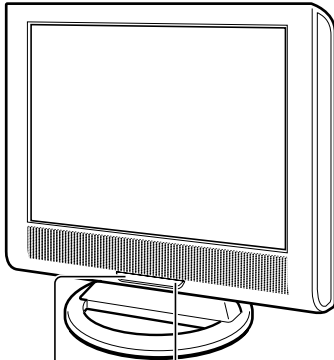


To change the vertical angle of the LCD TV set, tilt the screen up to 10 degrees forward or 20 degrees backward. The TV set can also be rotated 90 degrees horizontally. Please adjust the angle so that the TV set can be watched most comfortably.

Remote sensor window
(The actual location is not visible.)

Power/Standby indicator
A green indicator lights when the power is on and a red indicator lights when in the standby mode (the indicator will not light when the main power is off).



Rear control panel

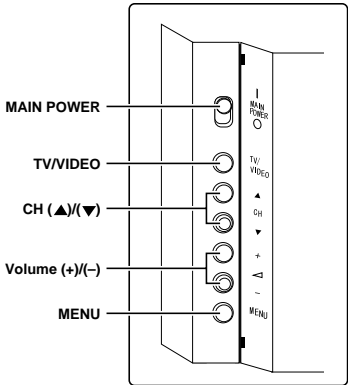


Note:
• TV/VIDEO, CH(▲)/(▼), and Volume (+)/(-) on the main unit have the same functions as the same buttons on the remote control. Fundamentally, this operation manual provides a description based on operation using the remote control.

Terminals


Rear view

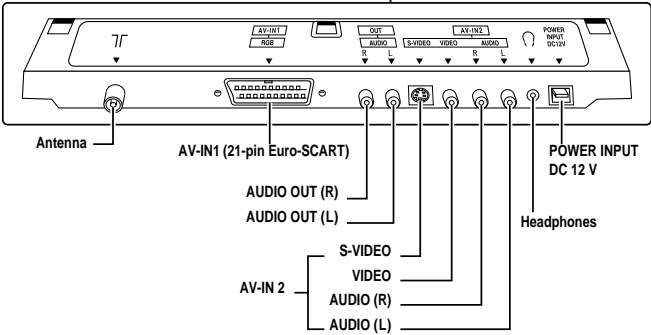

Remote control

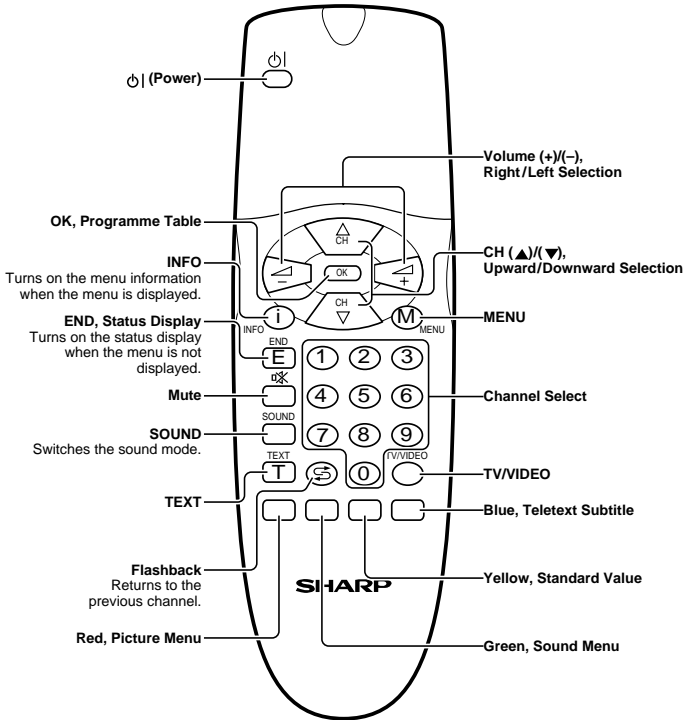


OUTLINE DIMENSION FIGURE

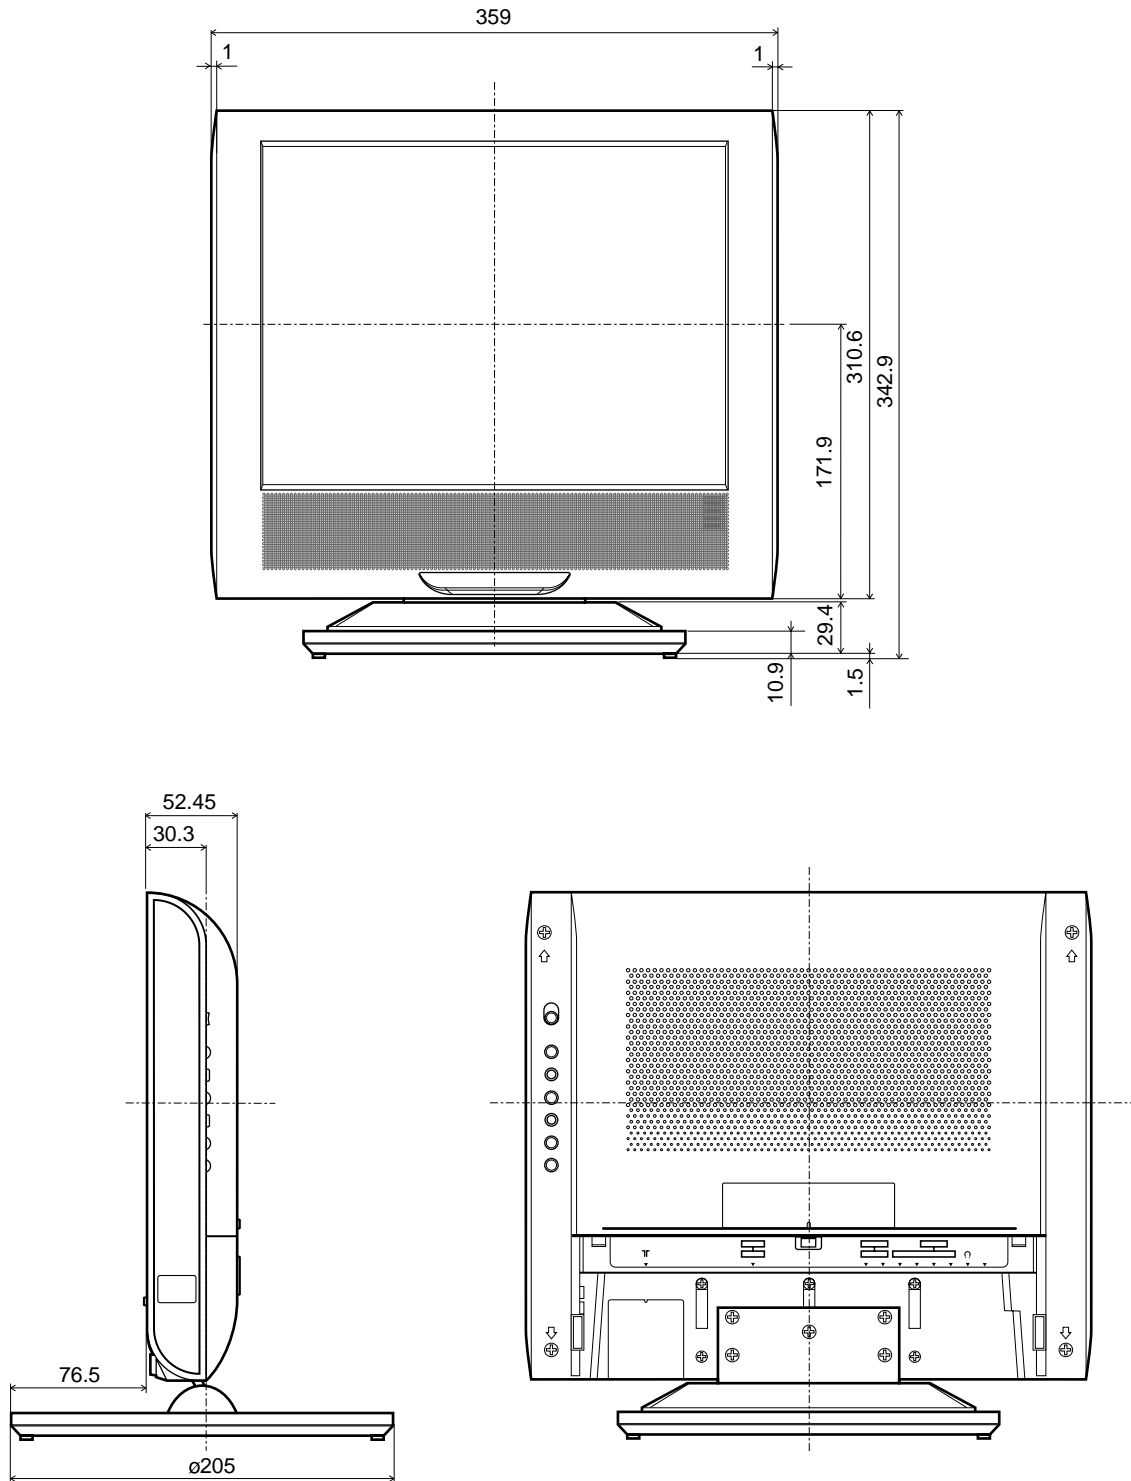


Units: mm

DISASSEMBLY OF THE SET

1. Insert your finger into the center of the terminal cover and pull it toward you to detach the terminal cover. Remove the screws installing a stand.
2. Remove the four screws ① and one screw ②.
3. Open the cabinet B by approx. 45° from the bottom of the cabinet (stand side).
4. Remove the lead wire from the cable clamp ③.
5. Remove the power connector ④.
6. Remove the connector ⑤ from the light reception unit.
7. Remove the lead wire from the cable clamp ⑥.
8. Remove the speaker connector ⑦.
9. Remove the FFC from the FFC connector ⑧ on the main PWB.
10. Remove the connector ⑨ from the switch PWB.
11. Remove the right and left speaker connectors ⑩ on the terminal PWB.

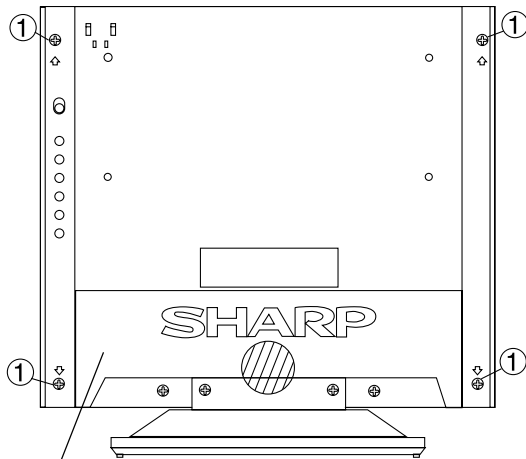

Terminal Cover GCOVA1922CEKA

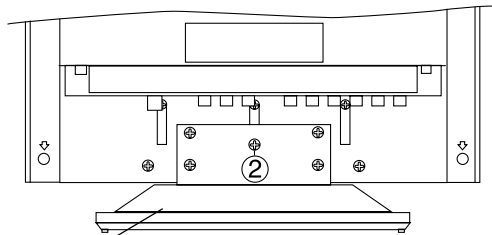

Hinge Cover GCOVA1853CESA
Rotation Cover GCOVA1854CESA


<<Disassembly of the main PWB>>

1. Disconnect the flexible cable connectors ⑪ and ⑫ from the LCD panel.
2. Disconnect the cable connectors ⑬ and ⑭ from the fluorescent lamp.
3. Remove the four screws ⑮.

<<Disassembly of the terminal PWB>>


1. Remove the five screws ⑯.
2. Remove the two screws ⑰. Remove the cover ⑱. Take them out of the cabinet holes.

<<Cabinet A side>>

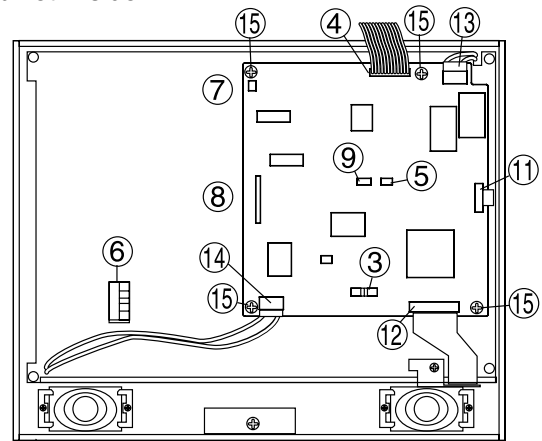

Cabinet A CCABA2402CE03

<<Cabinet B side>>

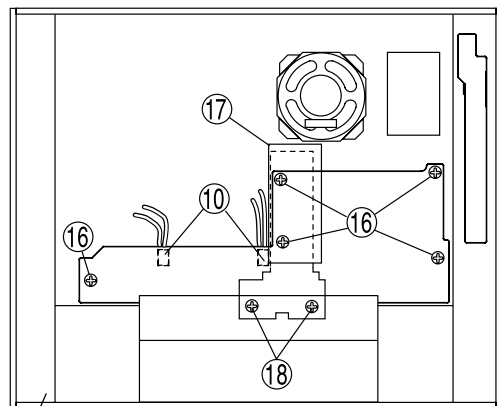


Cabinet B CCABB2298CE01

- Caution for handling the LCD panel
1. Work in a clean room. (Humidity: 50% or more)
 2. A worker must wear arm bands.
 3. Work on a conductive mat.
 4. Do not expose the unit to shock such as fall or vibration.

<<Disassembly of LCD Panel>>

1. Remove the six LCD unit fixing screws.
2. Remove the panel shield plate.
3. Remove the light guide sheet holder.
4. Remove the reflection panel lamp unit.
5. Remove the lamp unit.
6. Remove the light guide sheet.
7. Remove the ITO sheet angle.
8. Remove the ITO sheet, diffusion sheet and the polarising sheet.

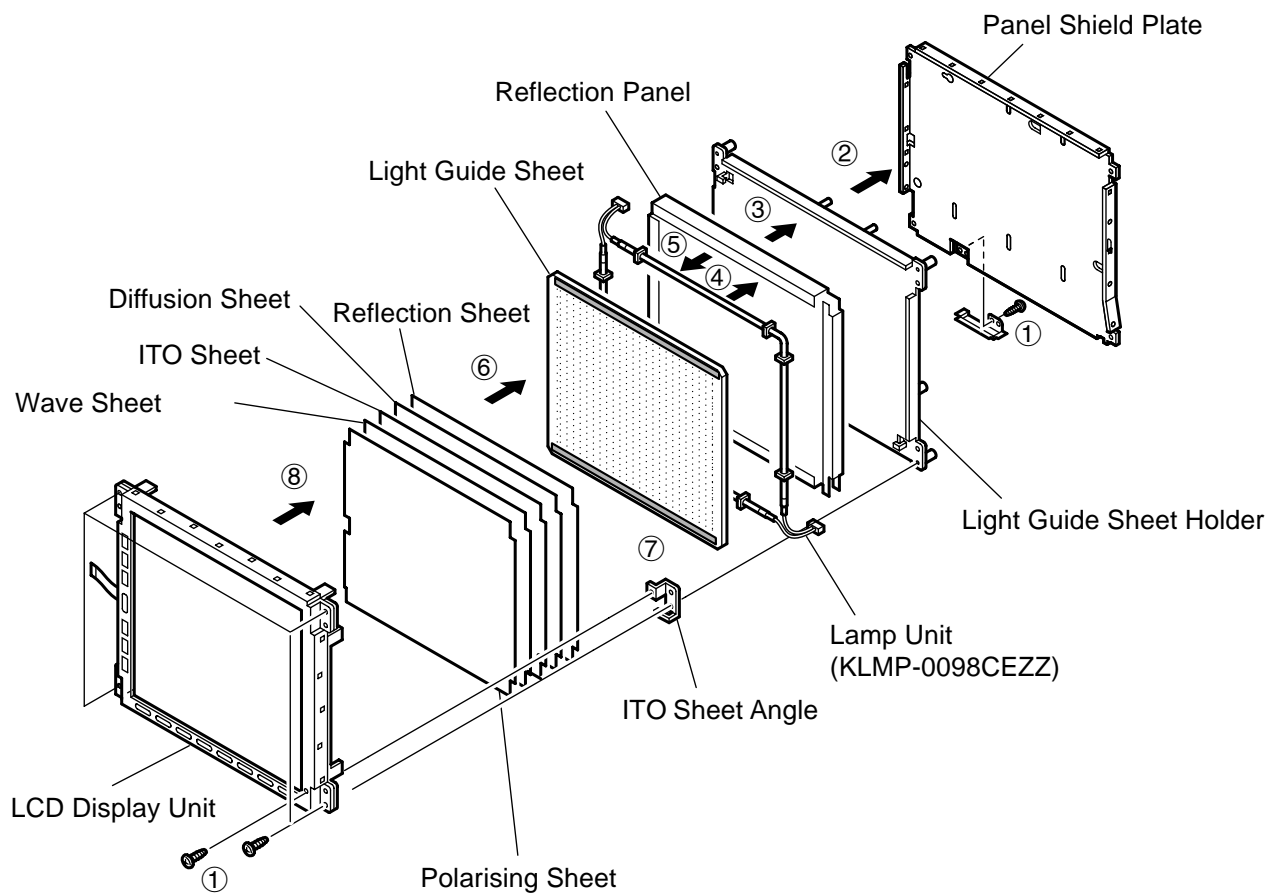

ADJUSTING PROCEDURE OF EACH SECTION

[1] Entering the MAIN side adjustment process mode

There are three methods below.


- 1) Press the "Adjustment process key" on the remote control after turning on the power.
- 2) Pressing both the MENU key and the TV/VIDEO key on the main body, turn on the power. Then, press the volume DOWN key and the tuning UP key at the same time.
- 3) Turn on the power with falling either KEY4 (pin 81 of microcomputer) or KEY5 (pin 82 of microcomputer) to "L".

[Note] For the method 3), the ROM is initialized at the same time. Therefore, 3) must be executed if IC2004 or IC2001 is changed. For 1) or 2), the main body only enters the MAIN side adjustment process.

[2] Entering the TUNER side adjustment process mode

- 4) Entering the TUNER side adjustment process

MENU key on the main body → Tuning UP key (remote control) → Select the position shown in the figure below and press the M key (remote control) within 1 second. → Enters the adjustment process.

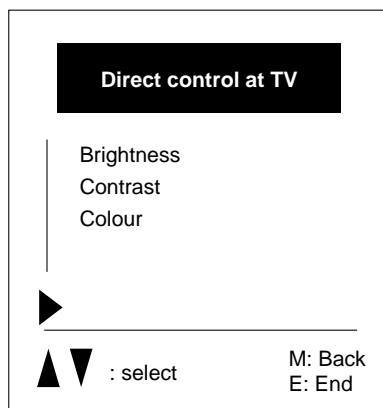

[3] Adjustment

MAIN side adjustment (Press the "M" key to move the cursor and press the volume UP/DOWN key to make an adjustment.)

- Power supply voltage adjustment (+B 5V)
- Model setting
- Inch size setting
- COMMON BIAS adjustment of LCD module
- CUTOFF adjustment

TUNER side adjustment (Press the tuning UP/DOWN key to move the cursor and press the volume UP/DOWN key to make an adjustment.)

- Horizontal size adjustment (LCD adjustments)
- Video adjustment (other adjustments)

Y delay

Subcontrast

Subcolour

Subbrightness

Tint offset

AGC gain start

The TUNER side adjustment is possible. However, it is recommended to replace EAROM (I2).

		PAL/PAL60	SECAM	NTSC
RF	y delay	6	11	
	tint offset	0	0	
	sub contrast	2	2	
	sub colour	25	25	
AV1 AV2	y delay	7	10	8
	tint offset	0	0	0
	sub contrast	2	2	2
	sub colour	30	30	30
AVS	y delay	7	10	8
	tint offset	0	0	0
	sub contrast	2	2	2
	sub colour	30	30	30
AGC gain start		27		

3-1. +B adjustment

Page 9 of MAIN side adjustment process +B-ADJ

Adjust the voltage of the pin 49 of SC401 to $5.0V \pm 0.05V$.

3-2. Model setting

Page 9 of MAIN side adjustment process MODUL

Set to A2E.

3-3. Inch size setting

Page 9 of MAIN side adjustment process INCH SIZE

Set to 15.

3-4. COMMON BIAS adjustment of LCD module

Page 9 of MAIN side adjustment process COM BIAS


Input the picture of gray scale and adjust it so as to obtain the best contrast.

3-5. CUTOFF adjustment


Page 9 of MAIN side adjustment process R CUTOFF, B CUTOFF

Adjust it so as to obtain the optimal colour balance.


TROUBLE SHOOTING TABLE

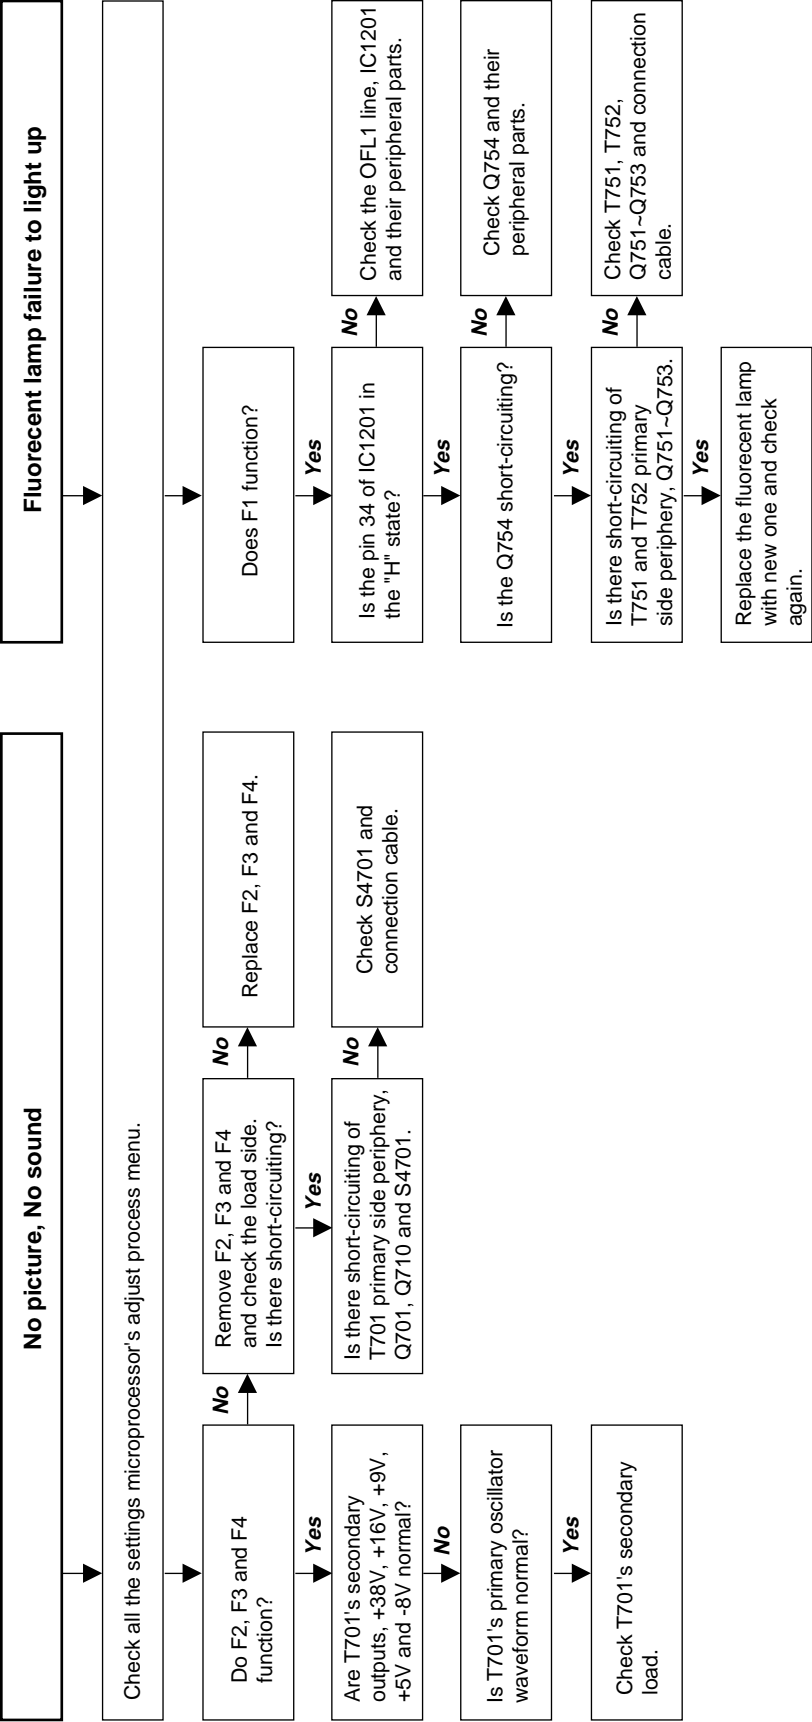


TROUBLE SHOOTING TABLE (Continued)

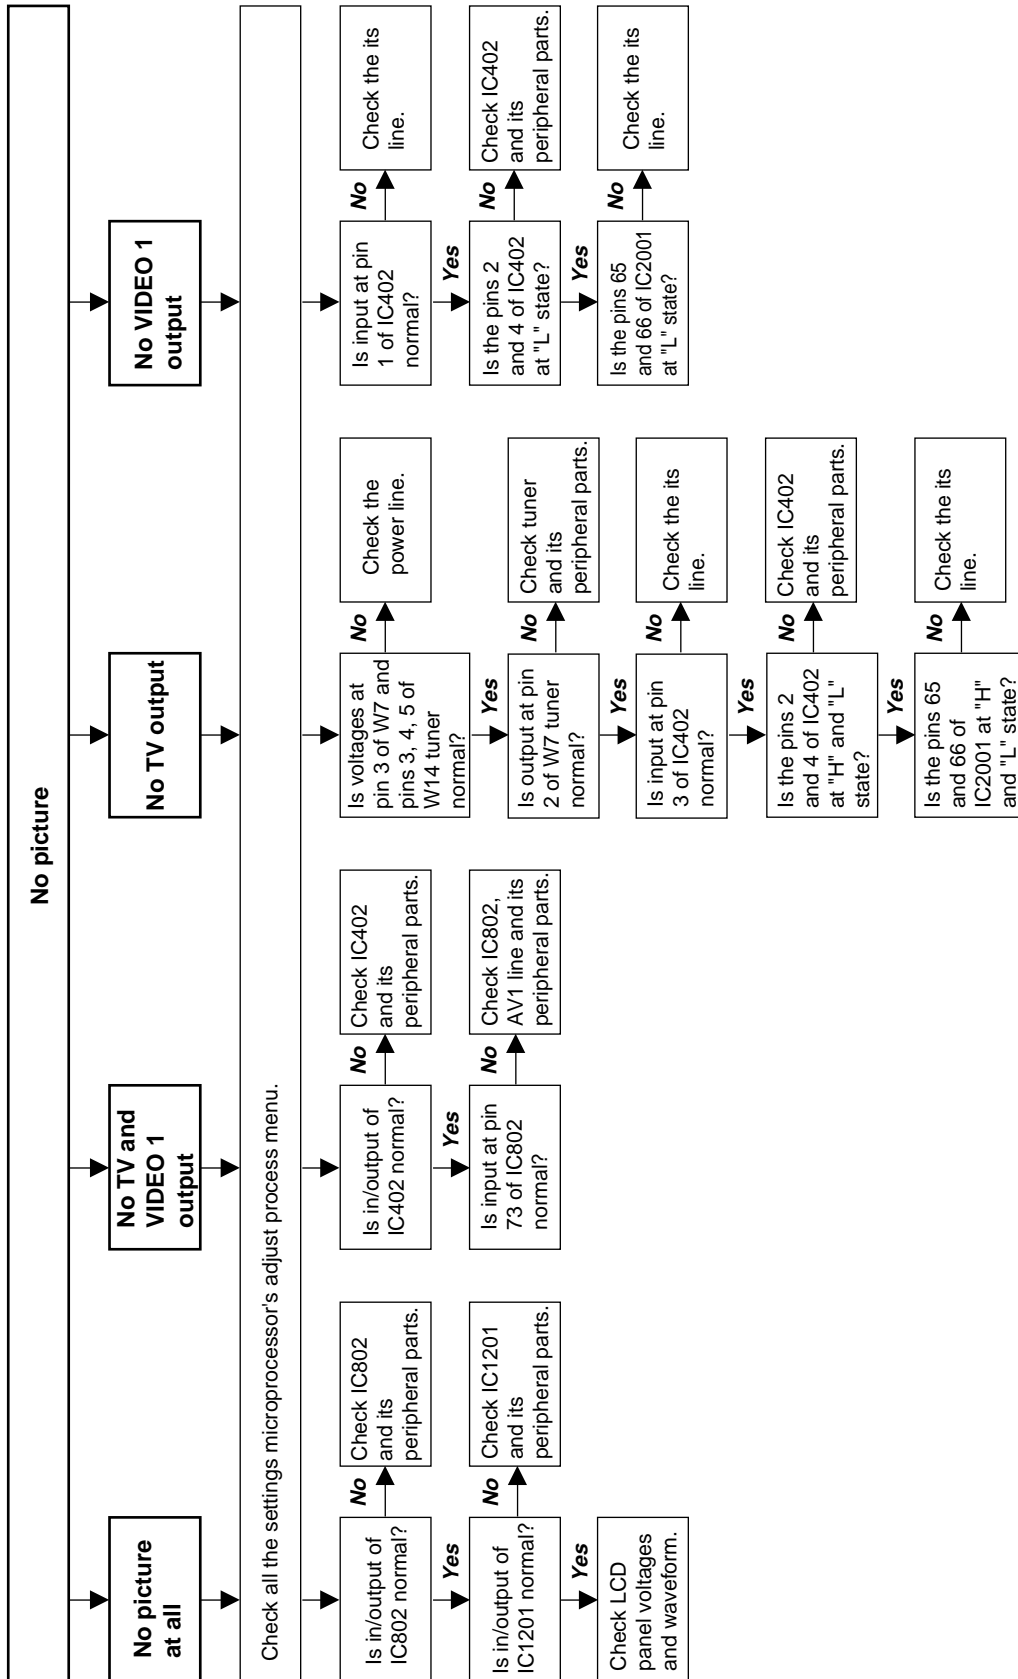


TROUBLE SHOOTING TABLE (Continued)

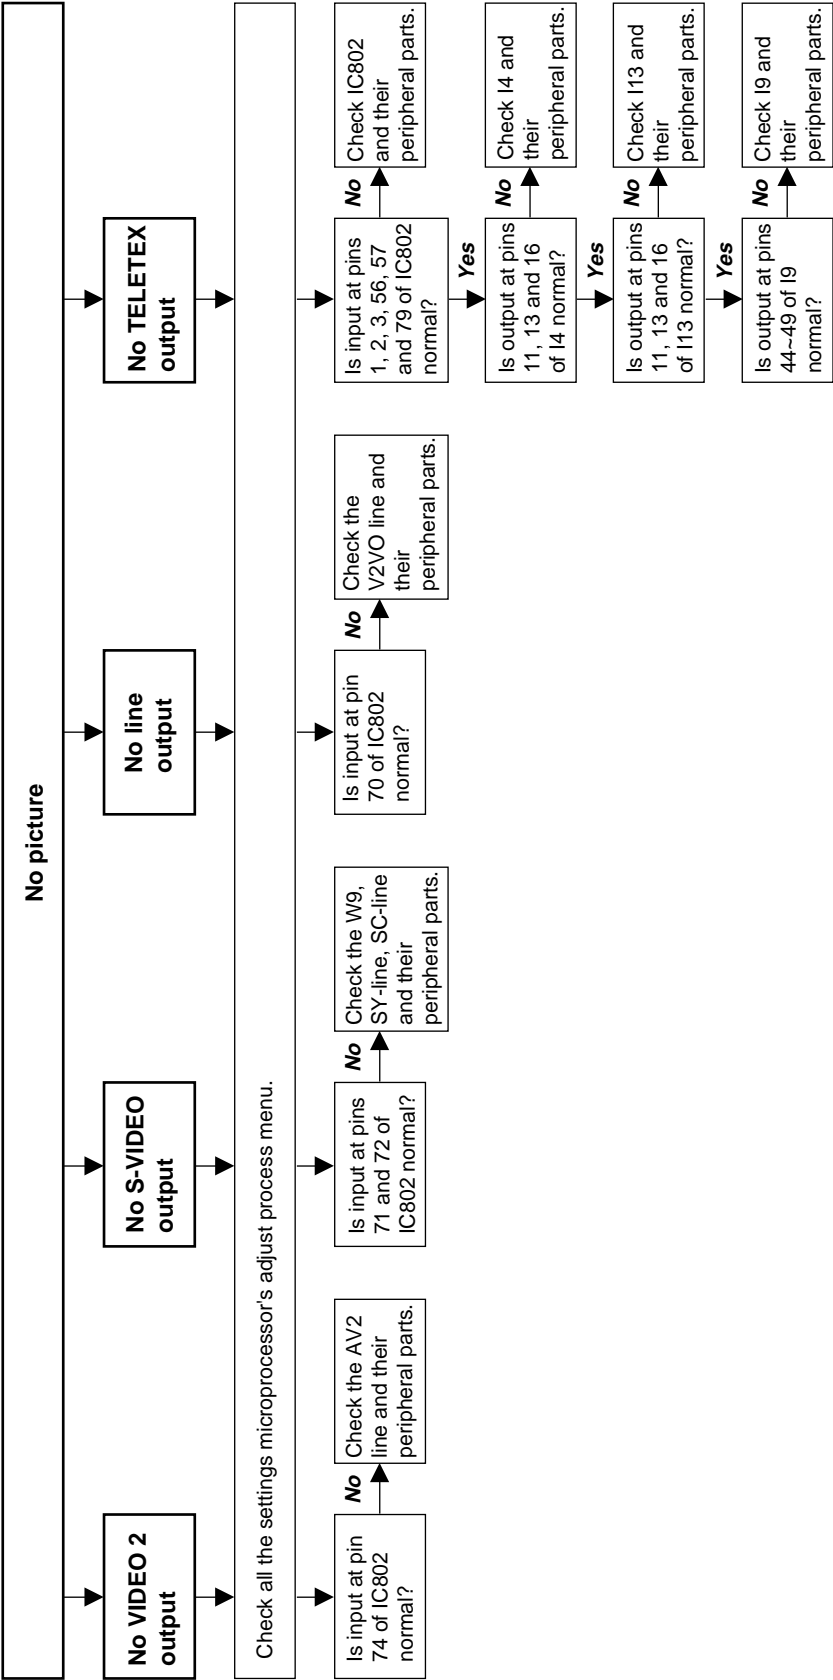

TROUBLE SHOOTING TABLE (Continued)

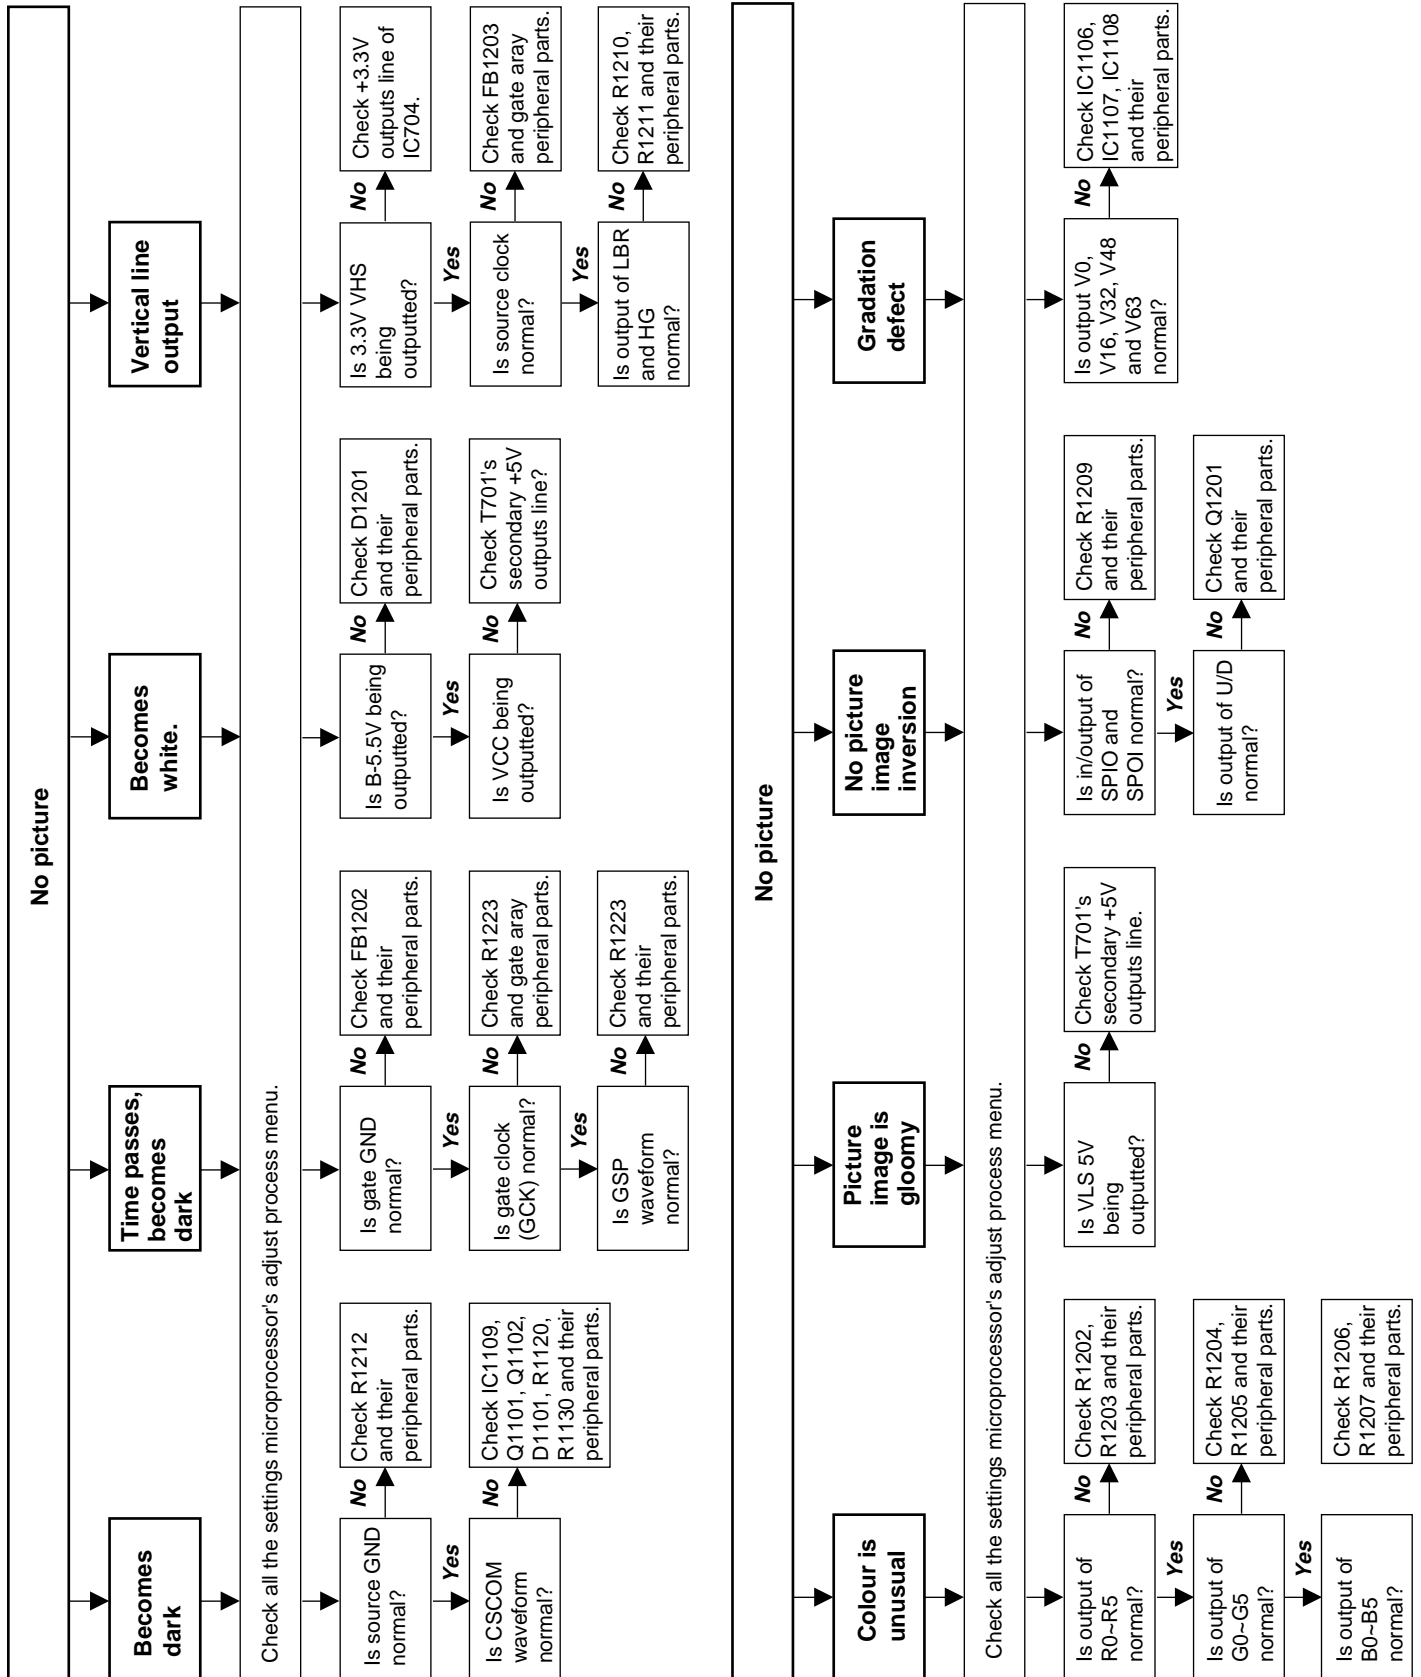

TROUBLE SHOOTING TABLE (Continued)

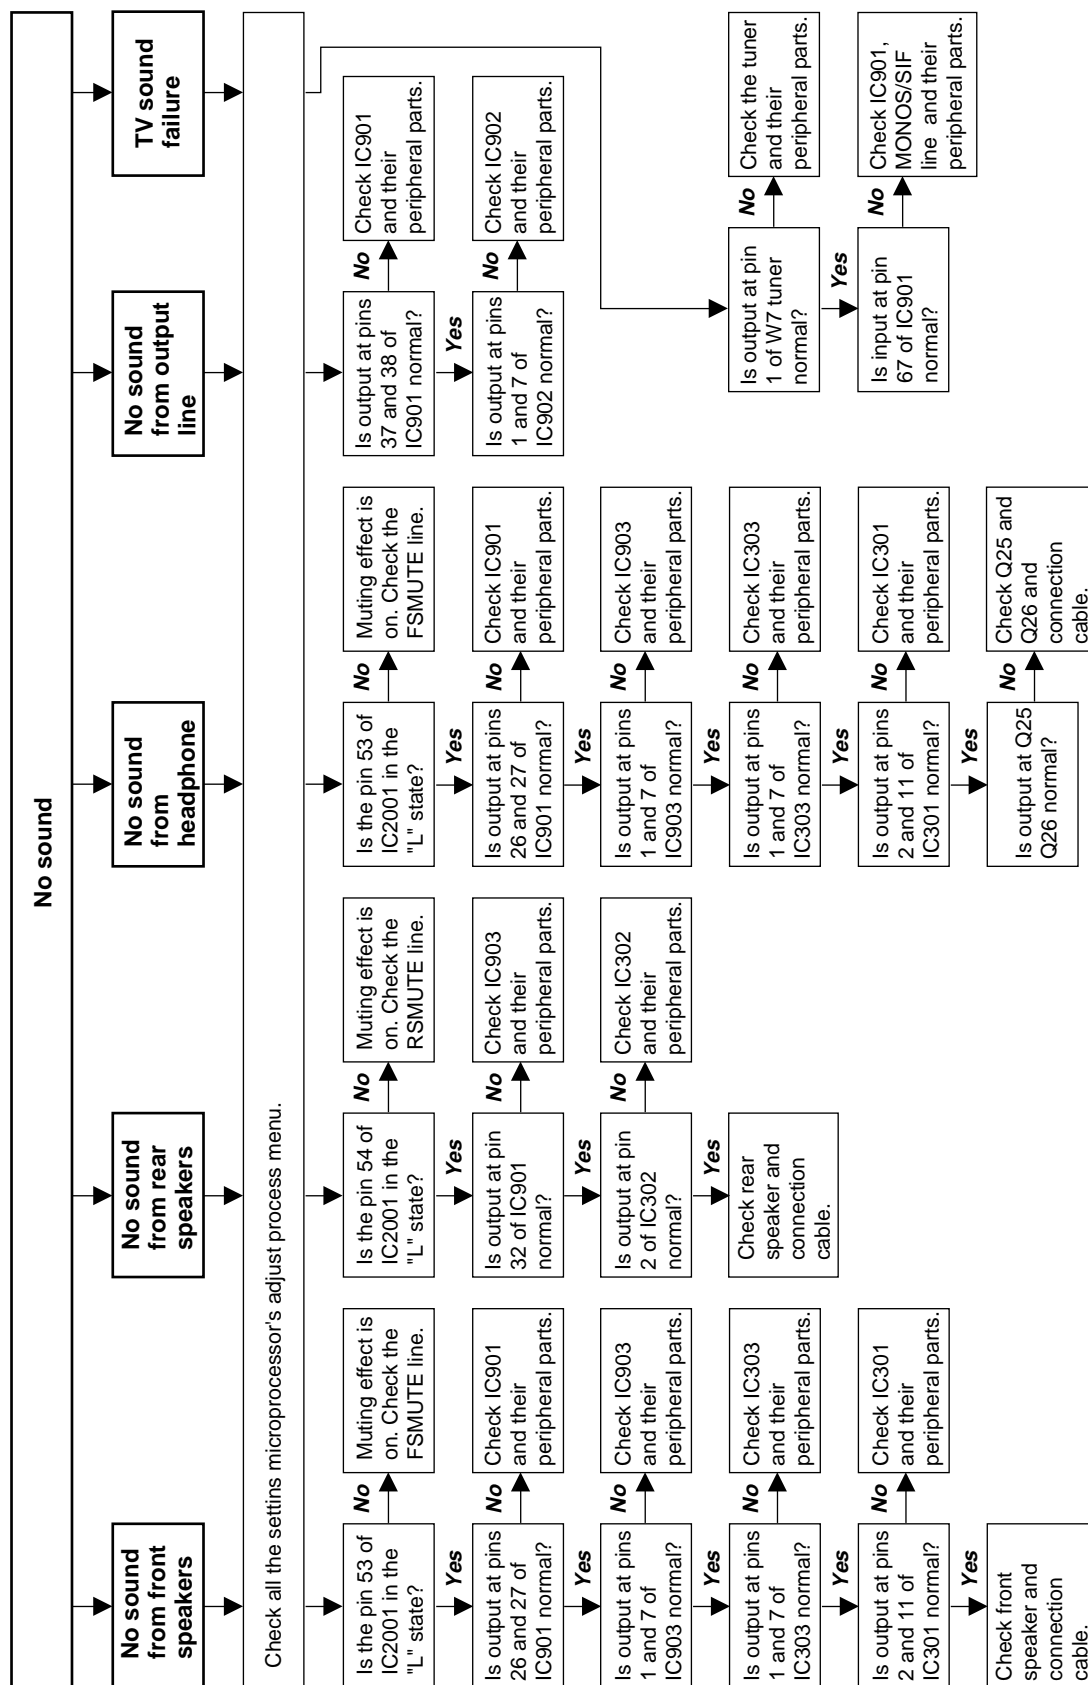


- M E M O -


[illegible]


CHASSIS LAYOUT

MAIN Unit (Side-A)

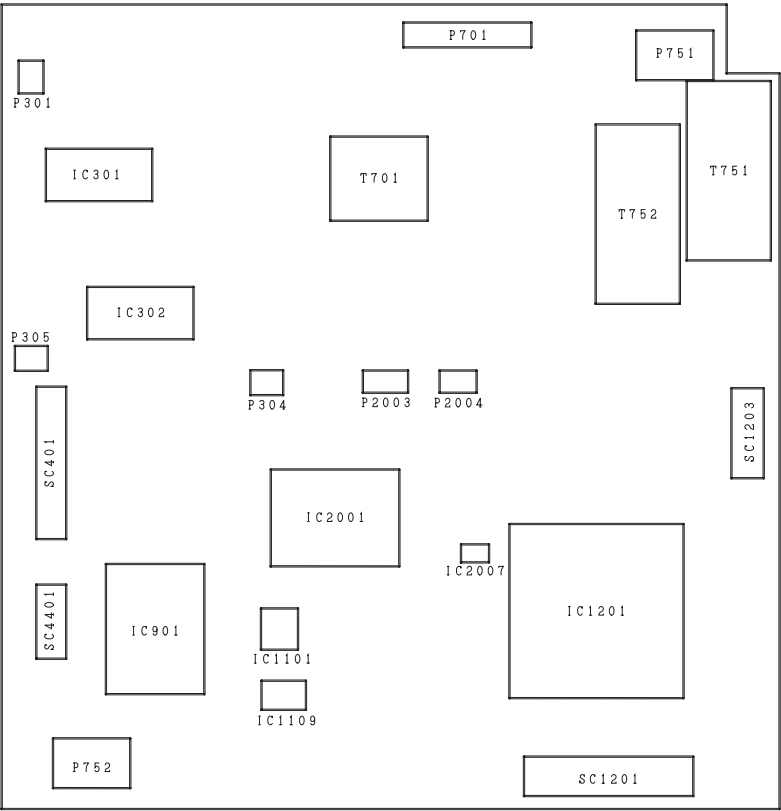


MAIN Unit (Side-B)

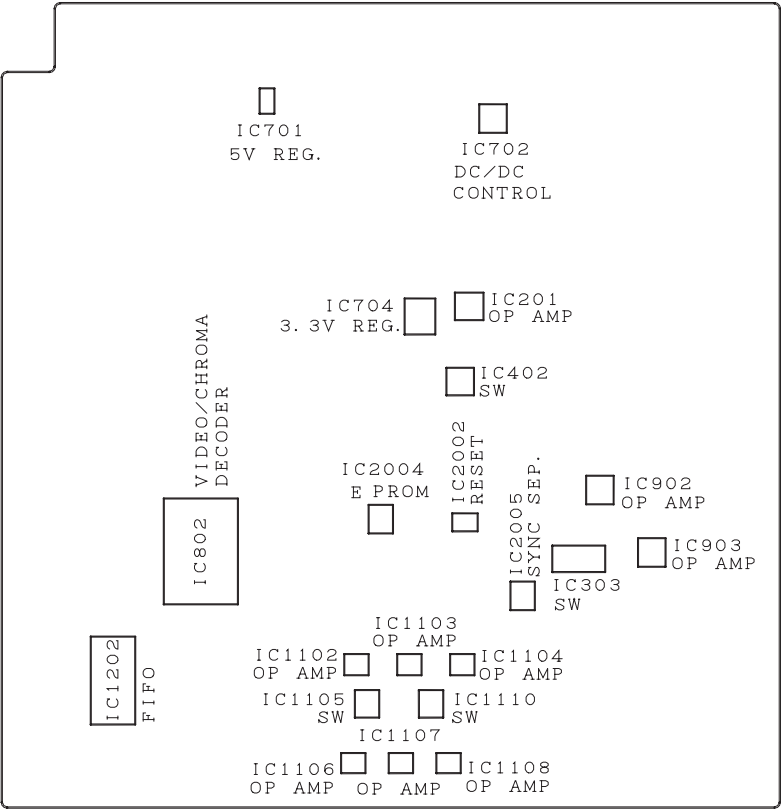

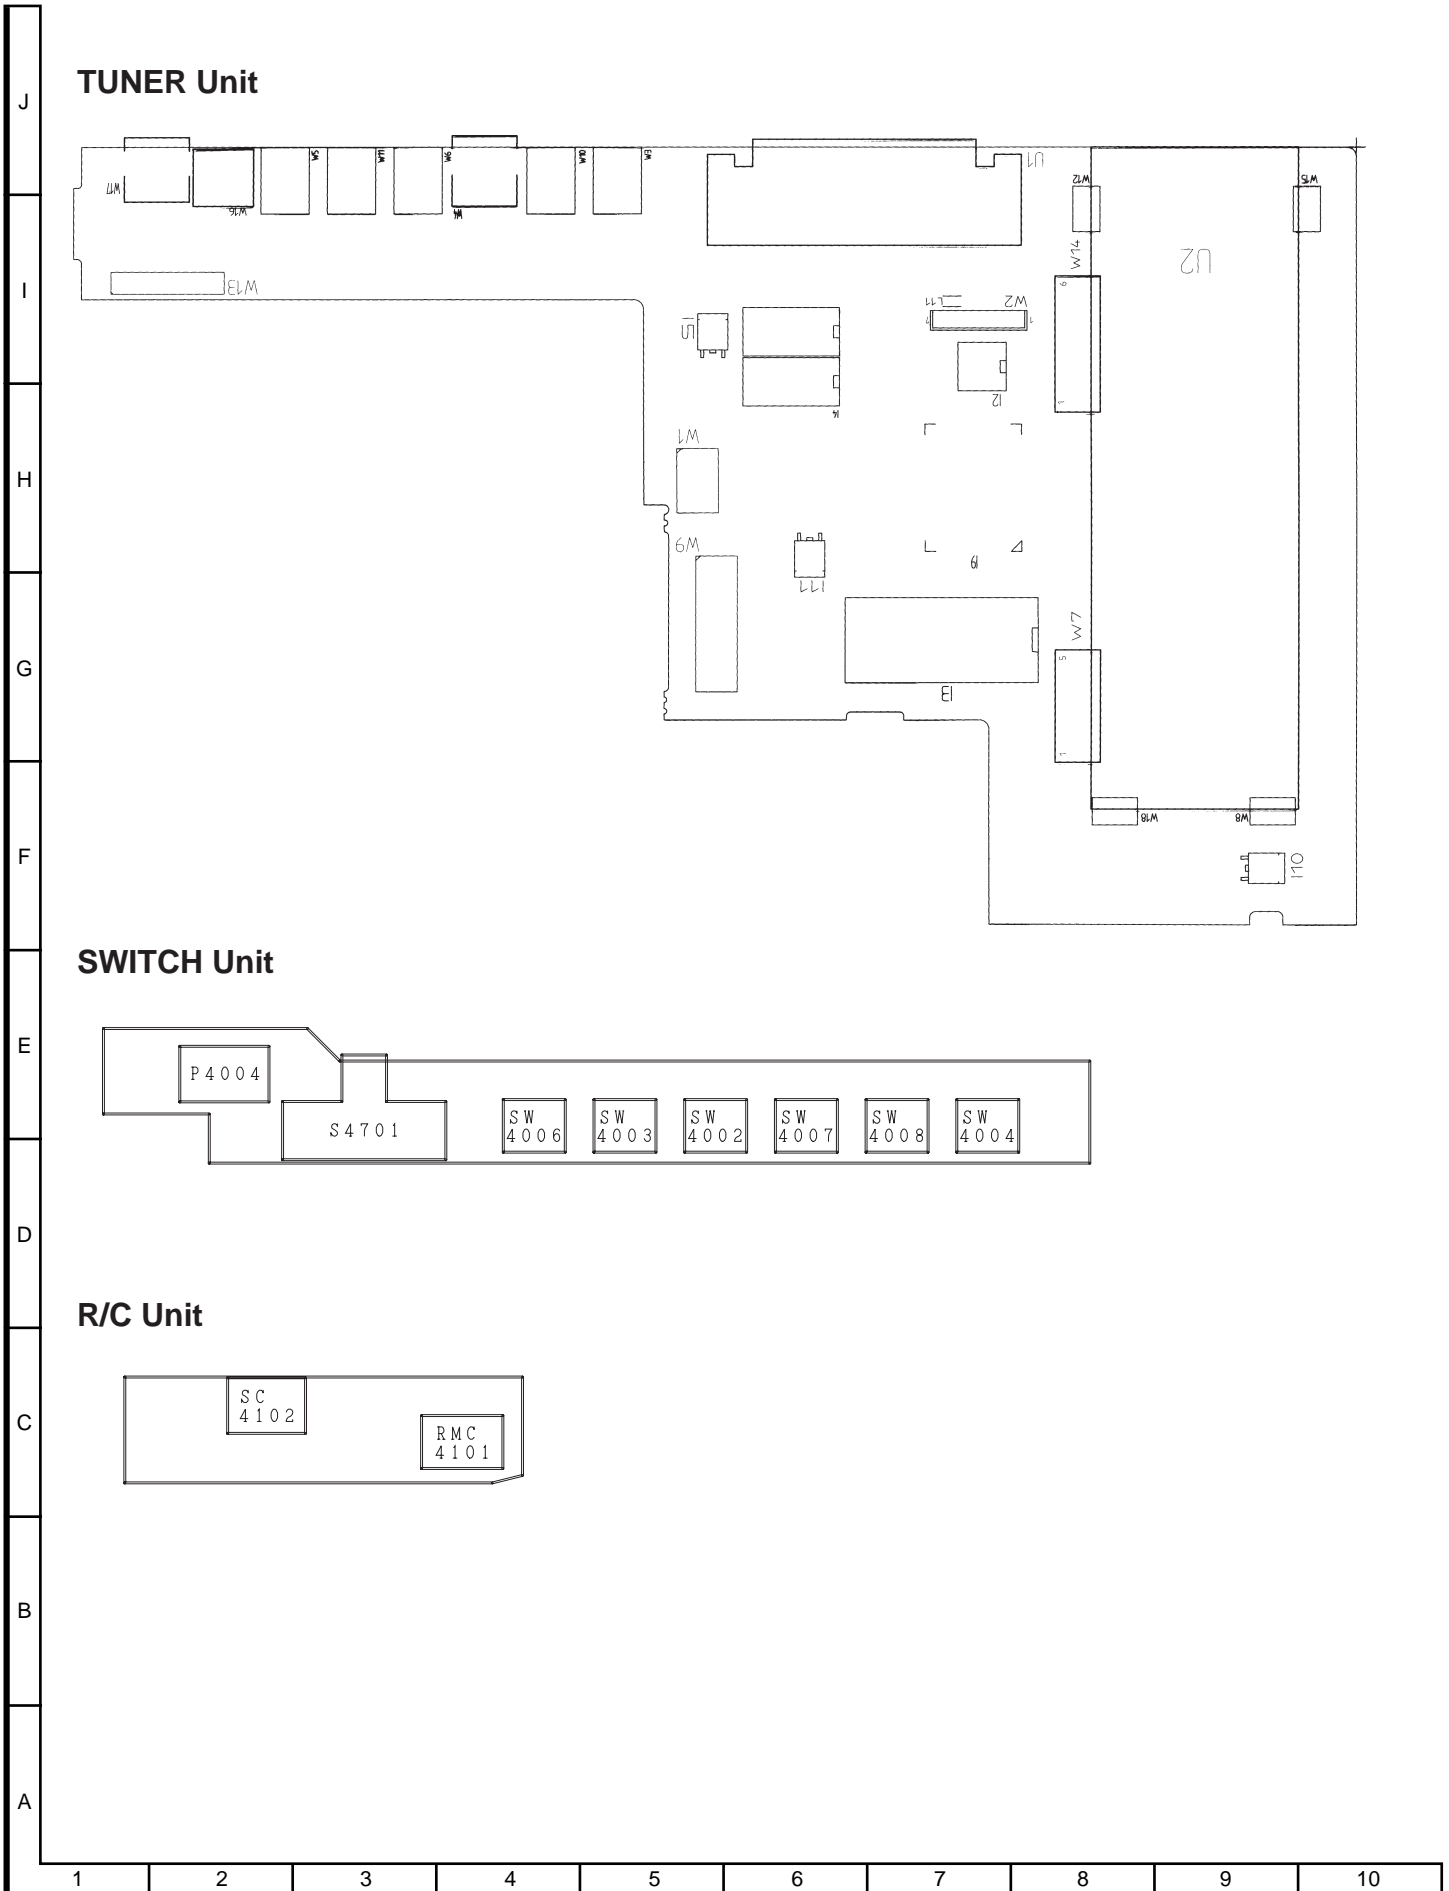


BLOCK DIAGRAMS


■ MAIN BLOCK DIAGRAM

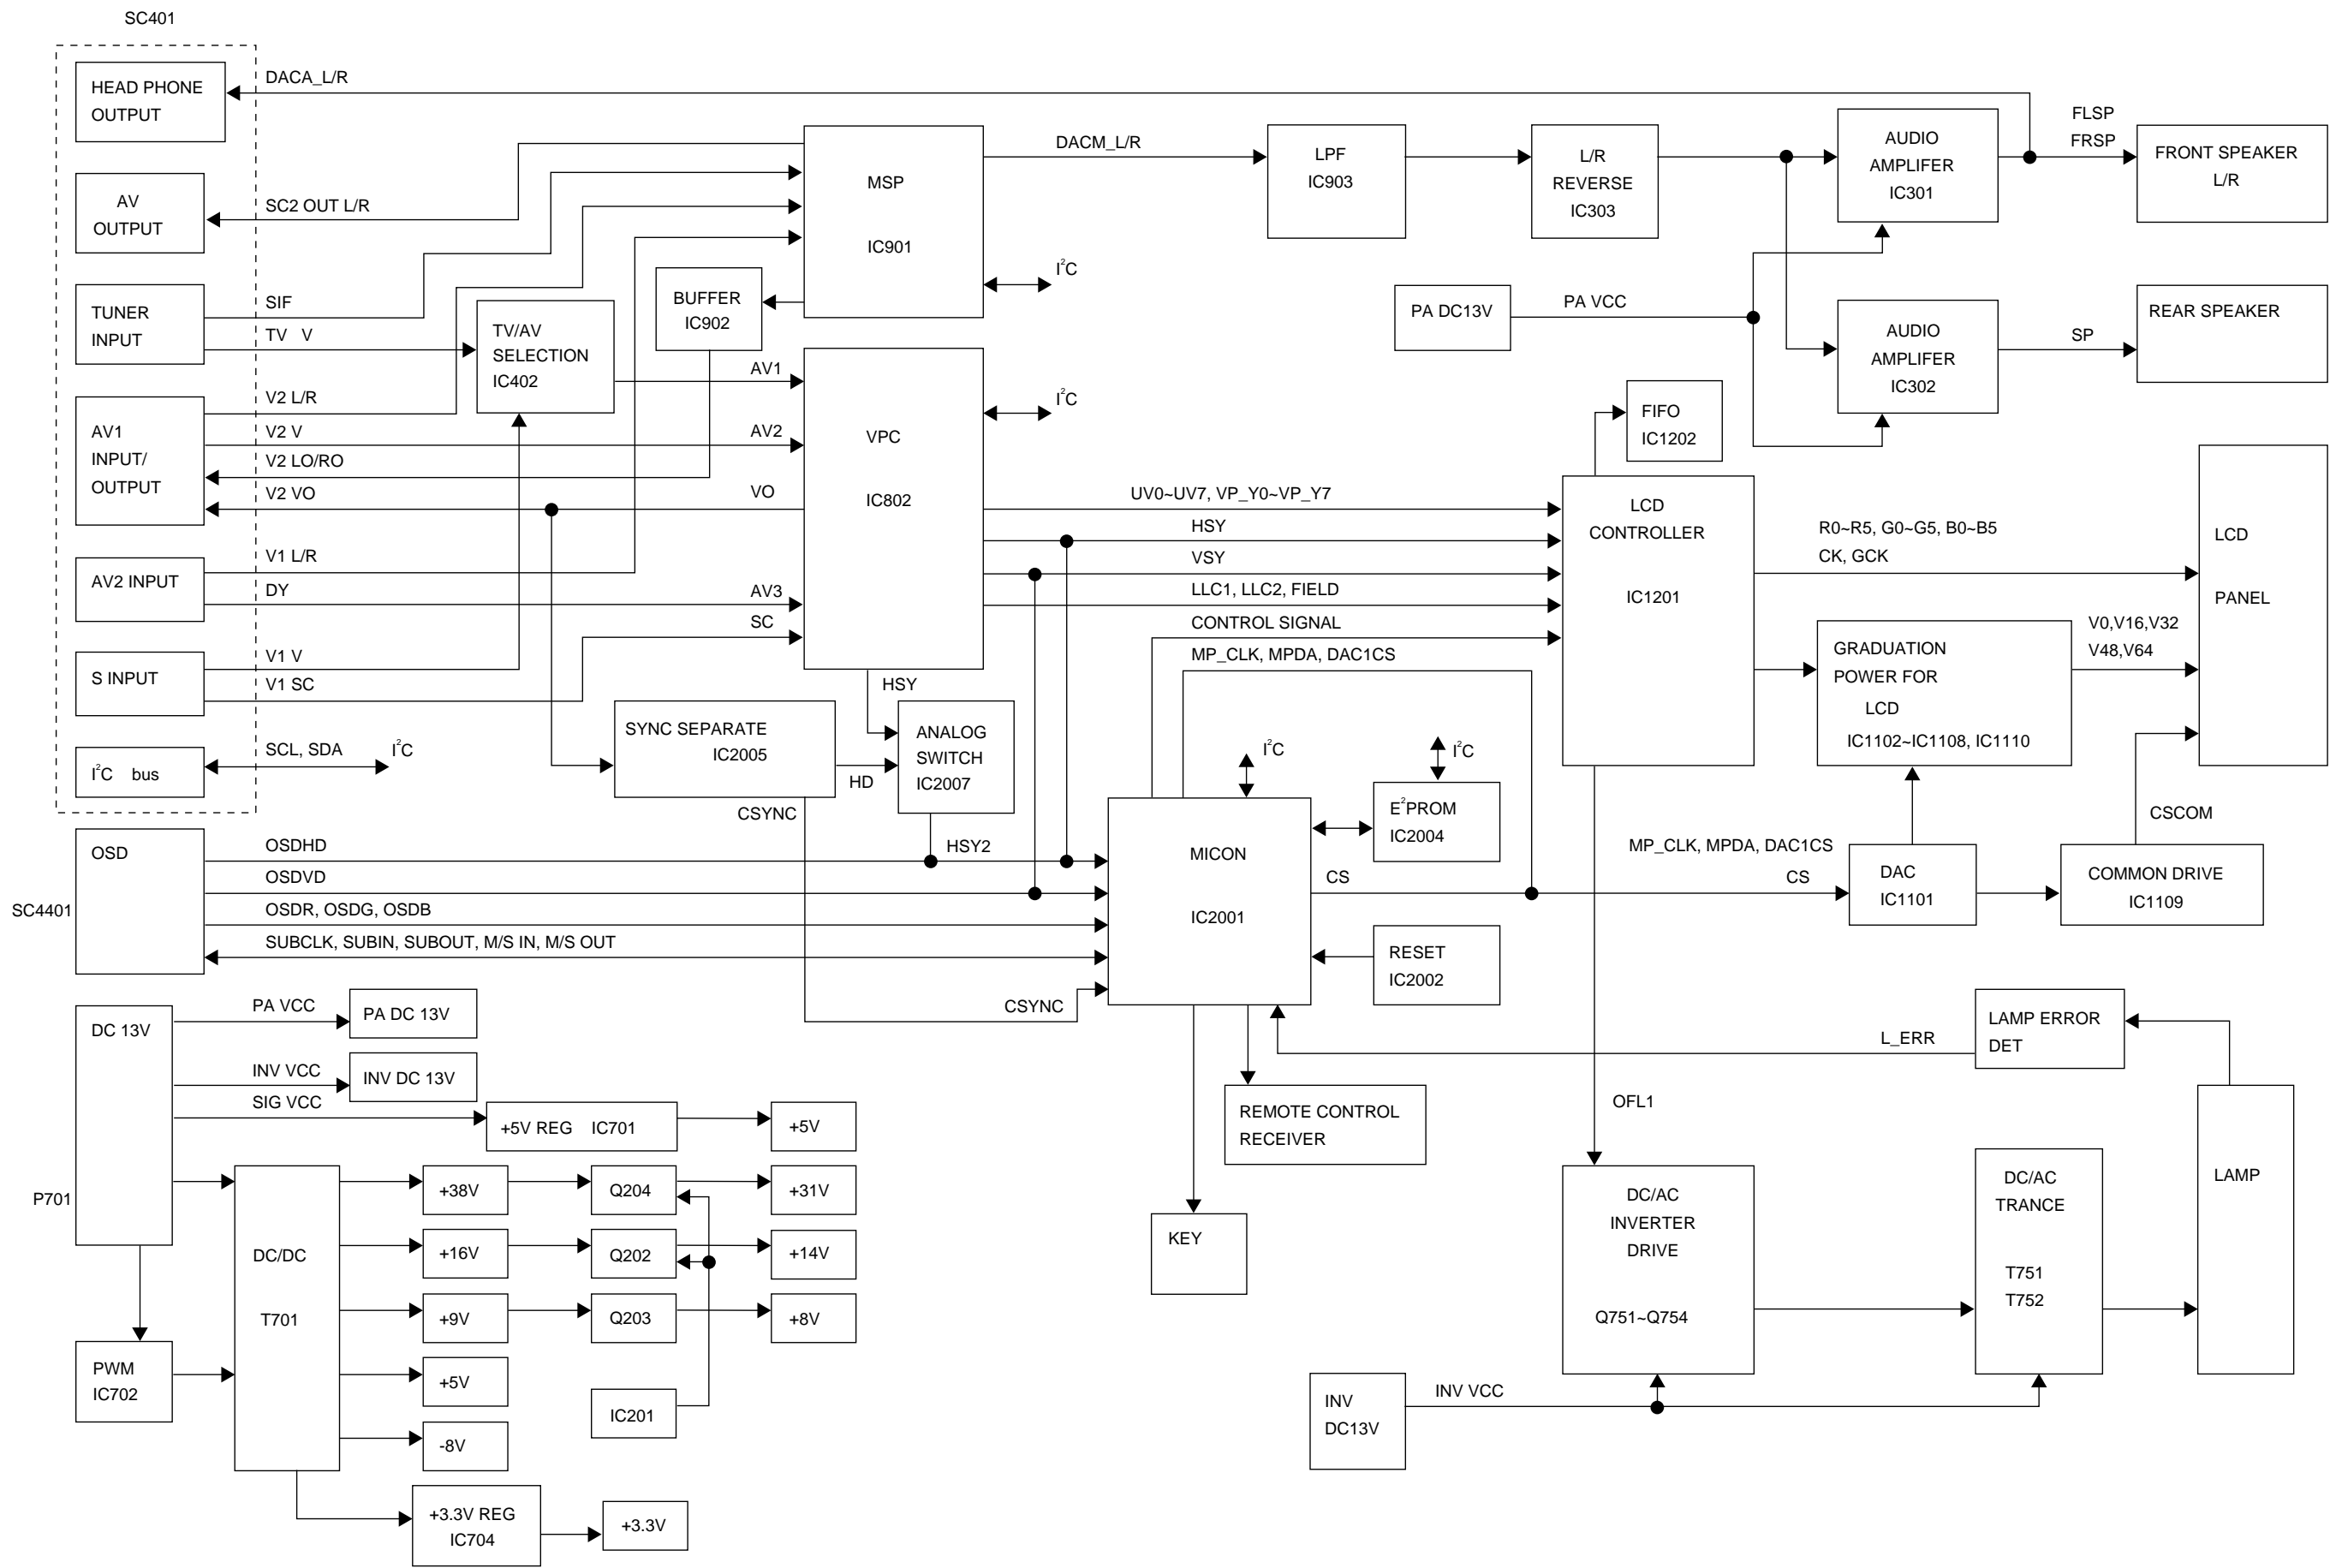

■ TUNER BLOCK DIAGRAM

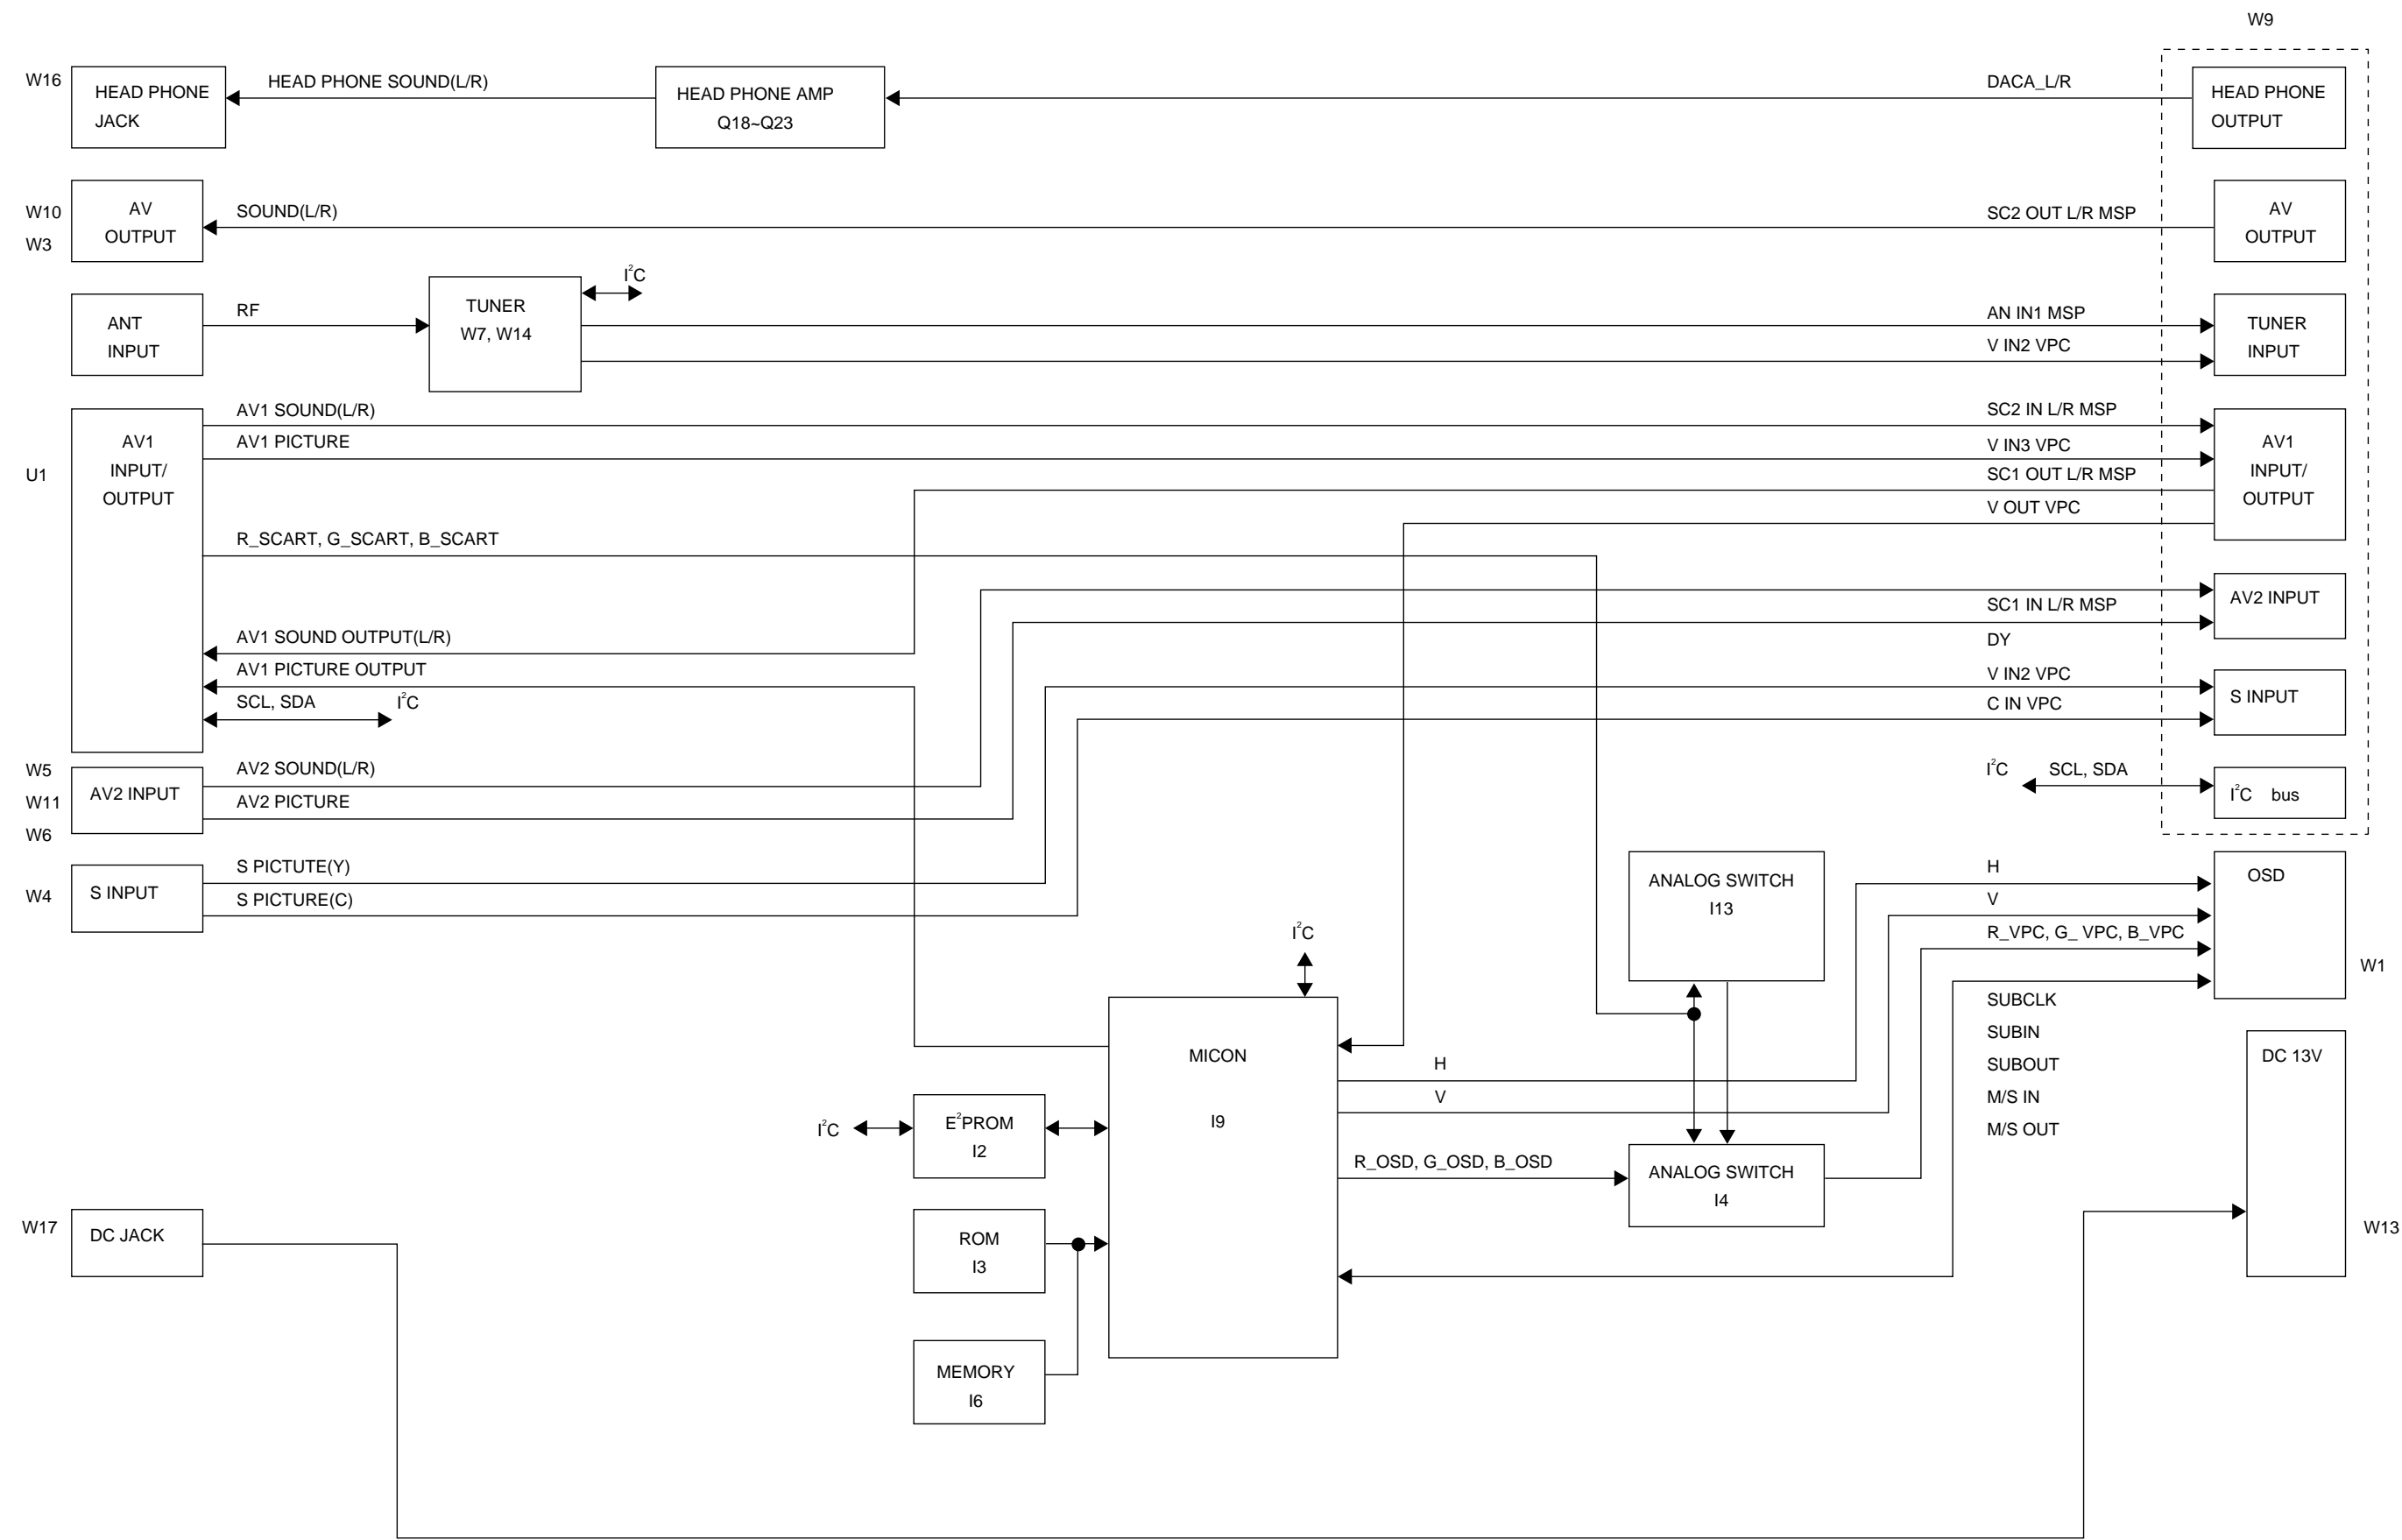


WAVEFORMS

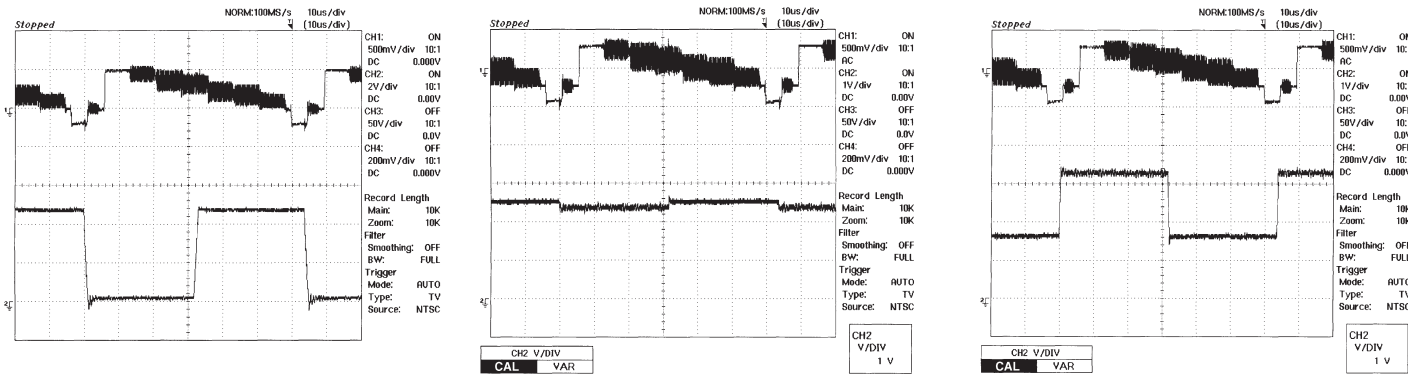

A. V0

B. V16


C. V32

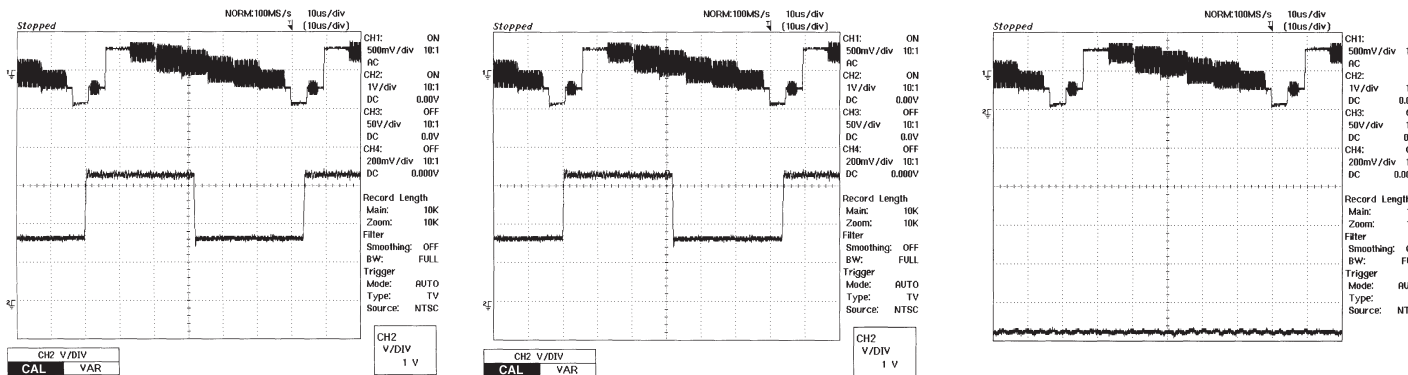

D. V48

E. V63


F. B-5.5

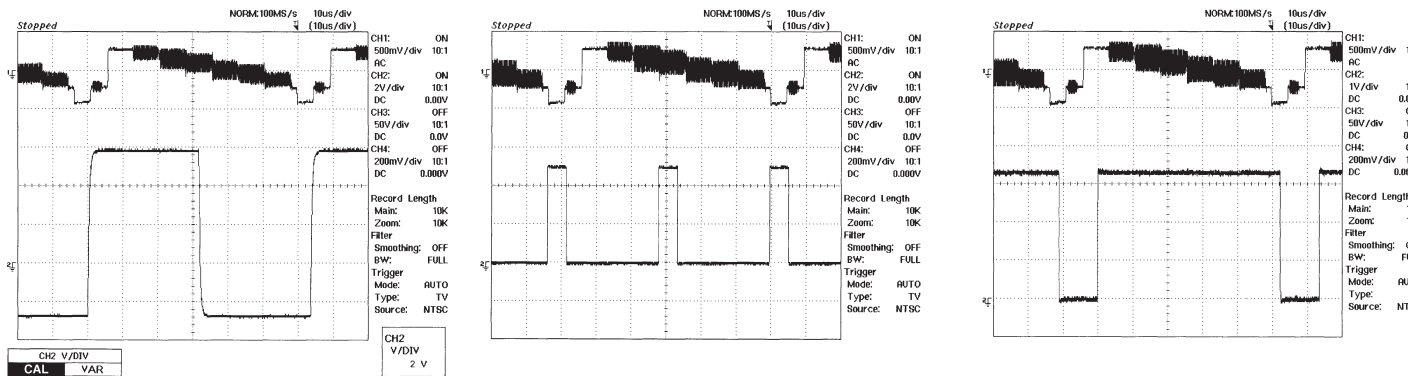

G. CSCOM

H. GCK


I. GSP

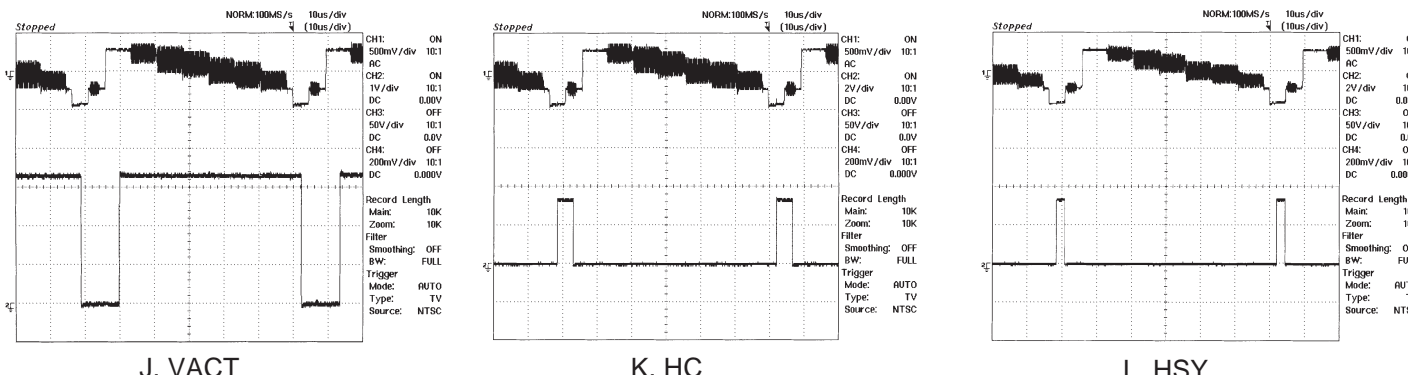


J. VACT

K. HC


L. HSY

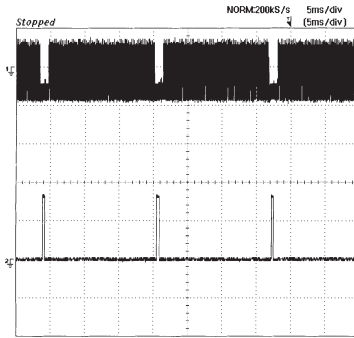


M. VSY

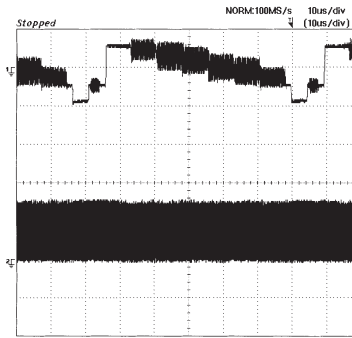


N. CK

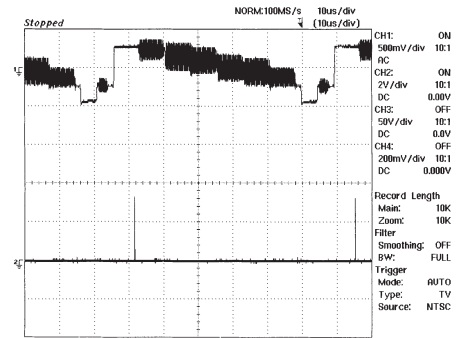


O. SPIO

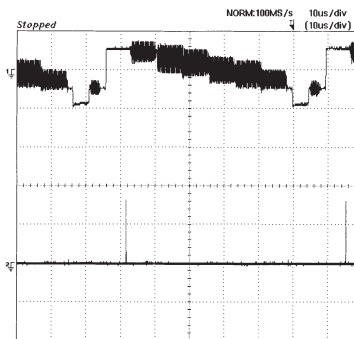


P. SPOI

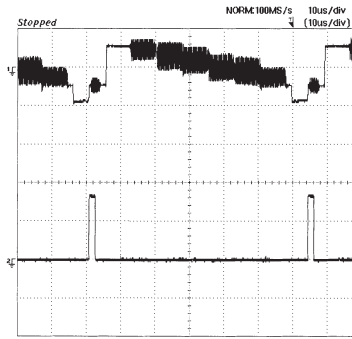


Q. HG

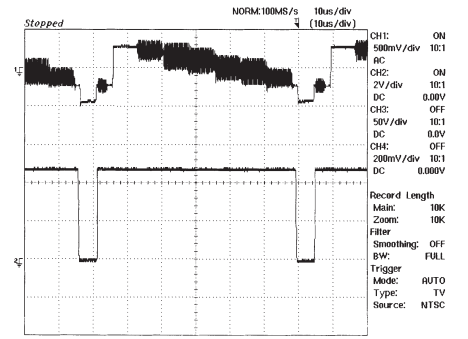

R. IC2005

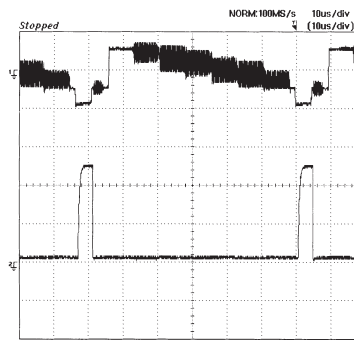



S. CSYNC

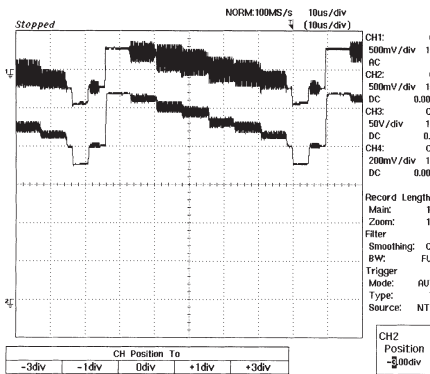


T. VIDEO

SCHEMATIC DIAGRAMS

■ SWITCH and R/C Unit

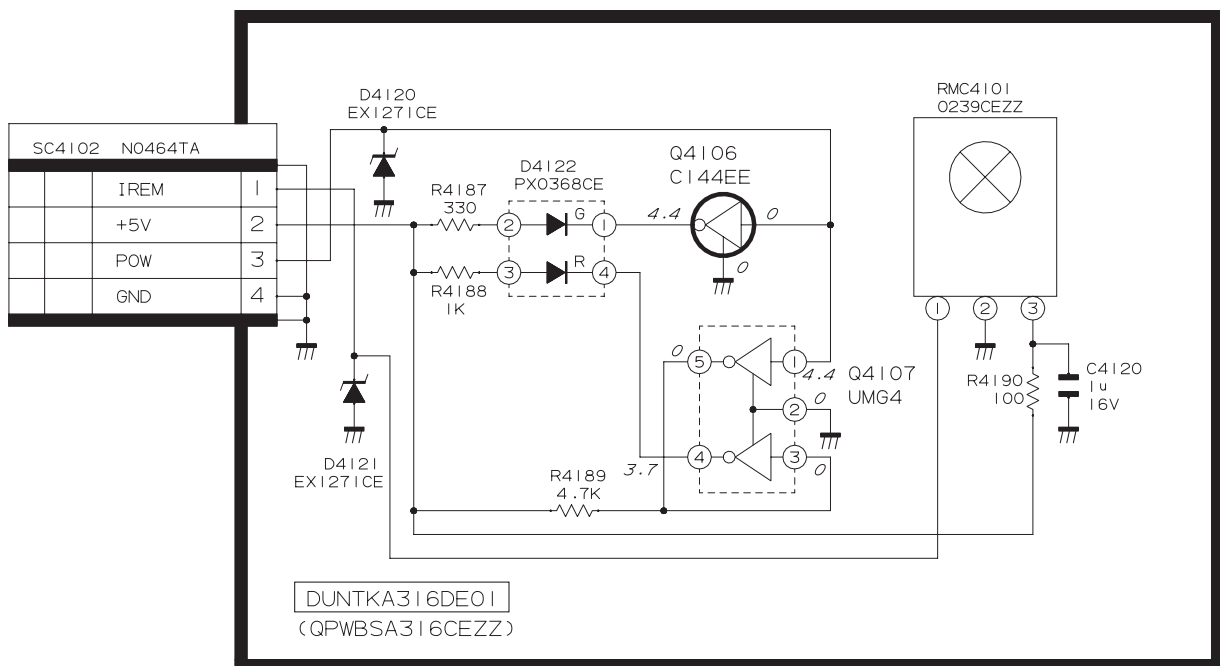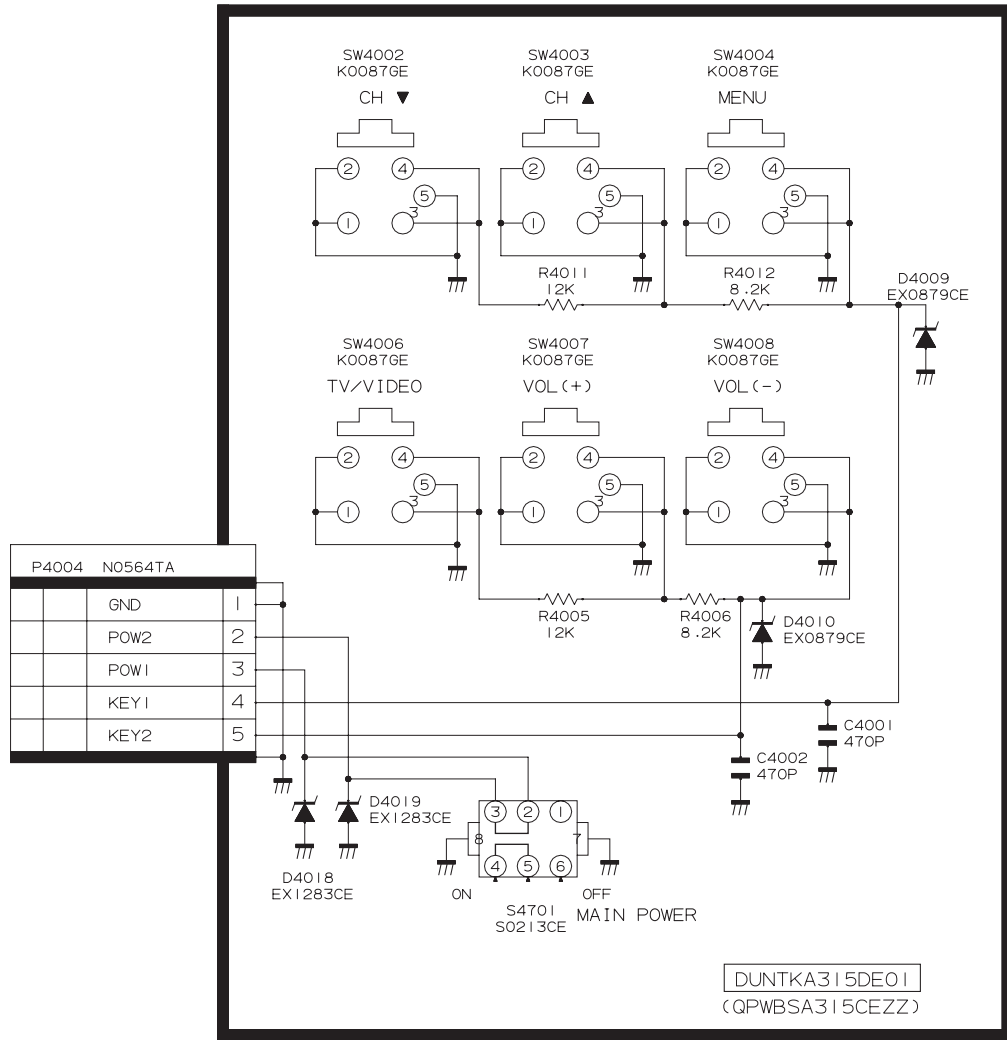


⚠ AND SHADED COMPONENTS=SAFETY RELATED PARTS

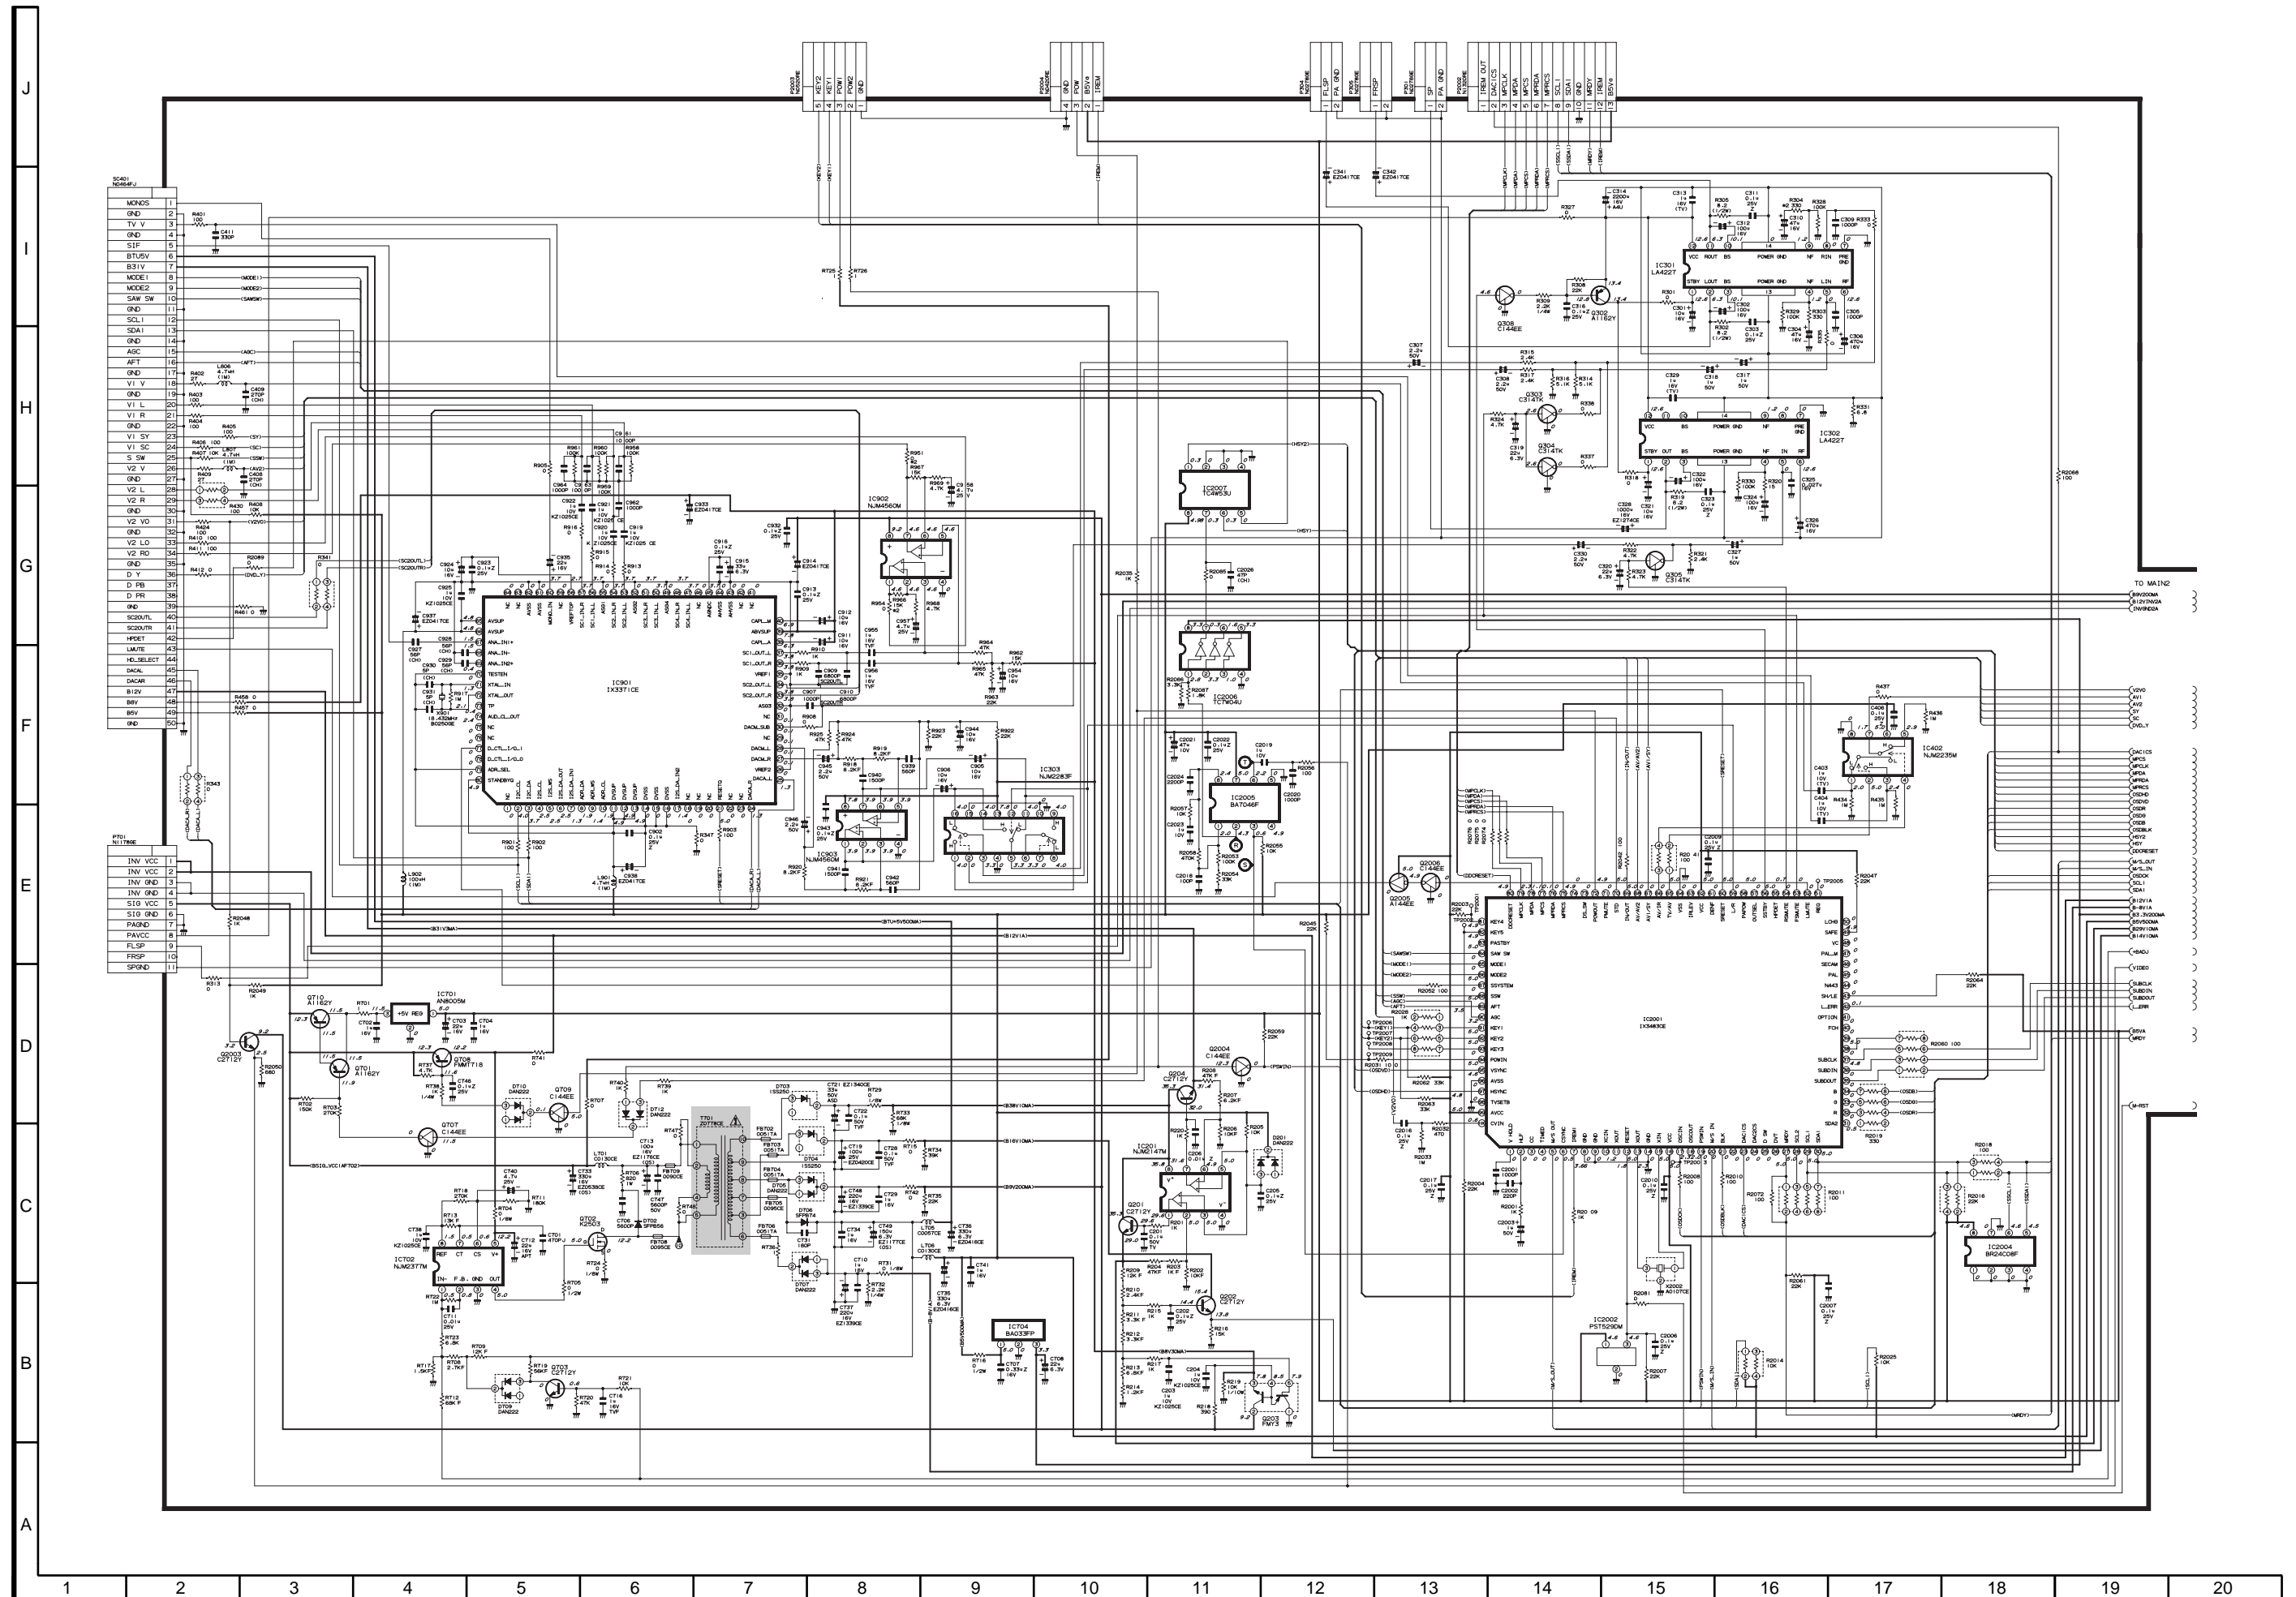


⚠ AND SHADED COMPONENTS=SAFETY RELATED PARTS

MAIN Unit -2/2

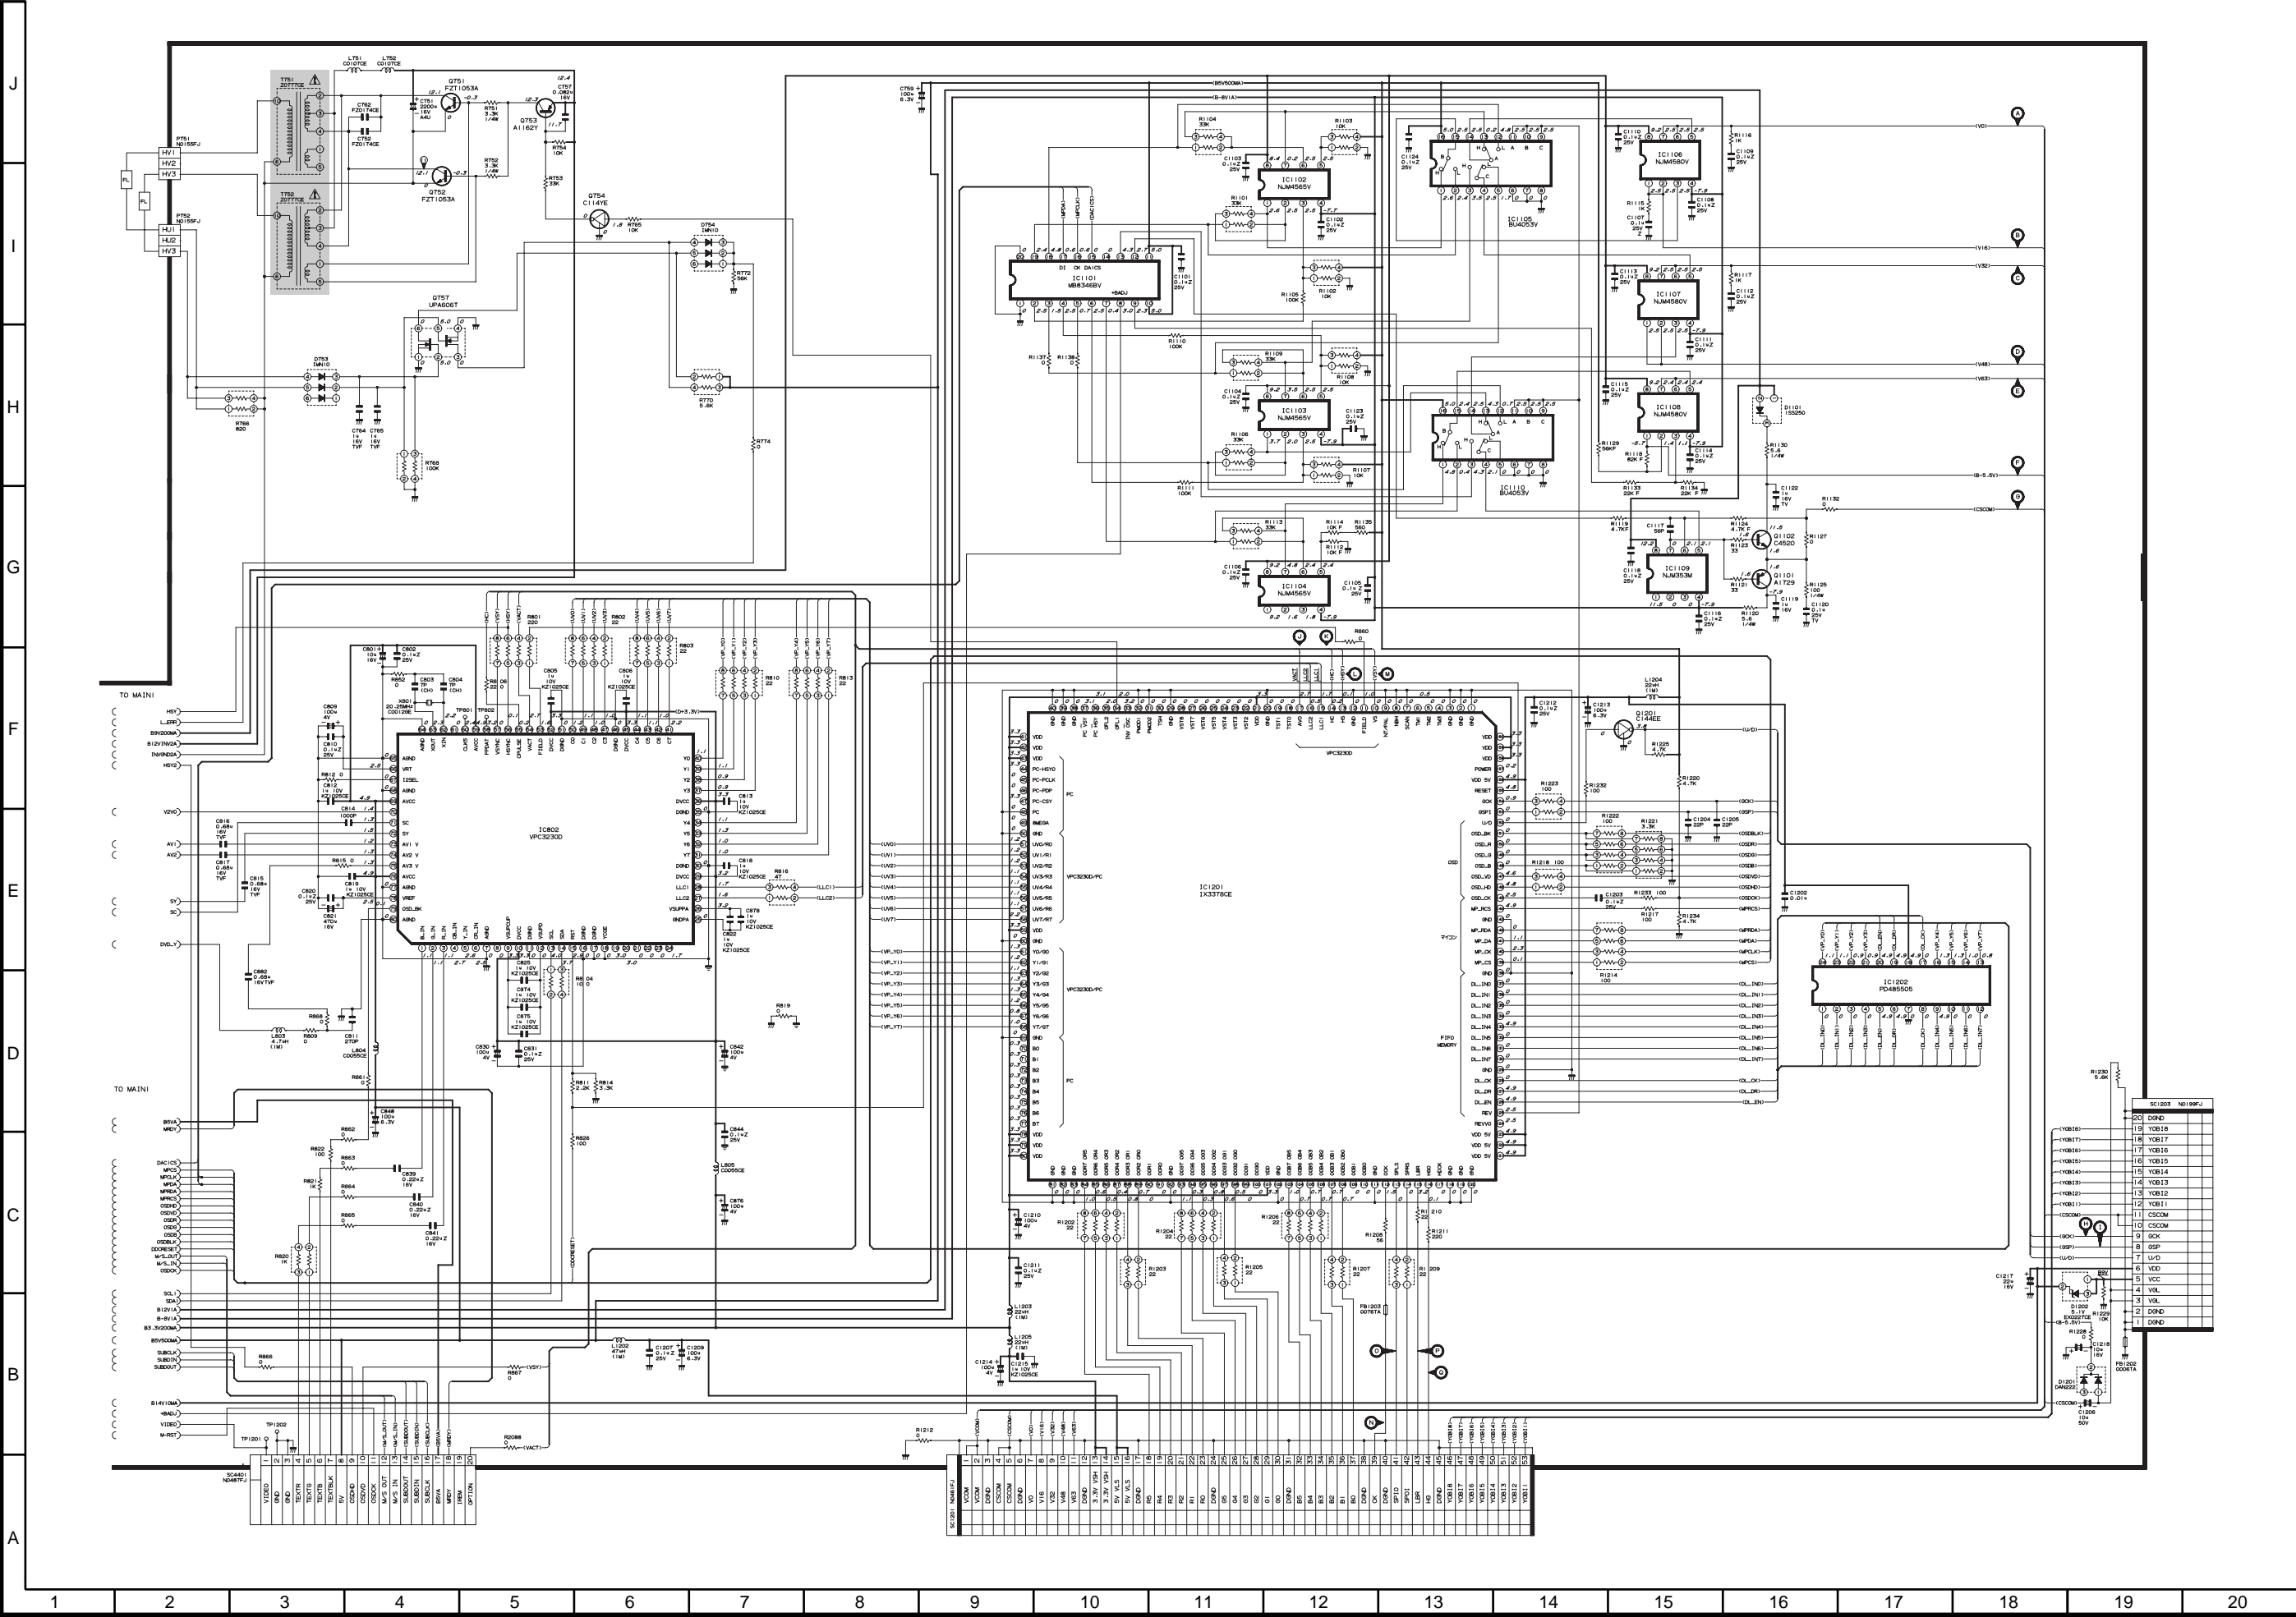


TUNER Unit

⚠ AND SHADED COMPONENTS=SAFETY RELATED PARTS

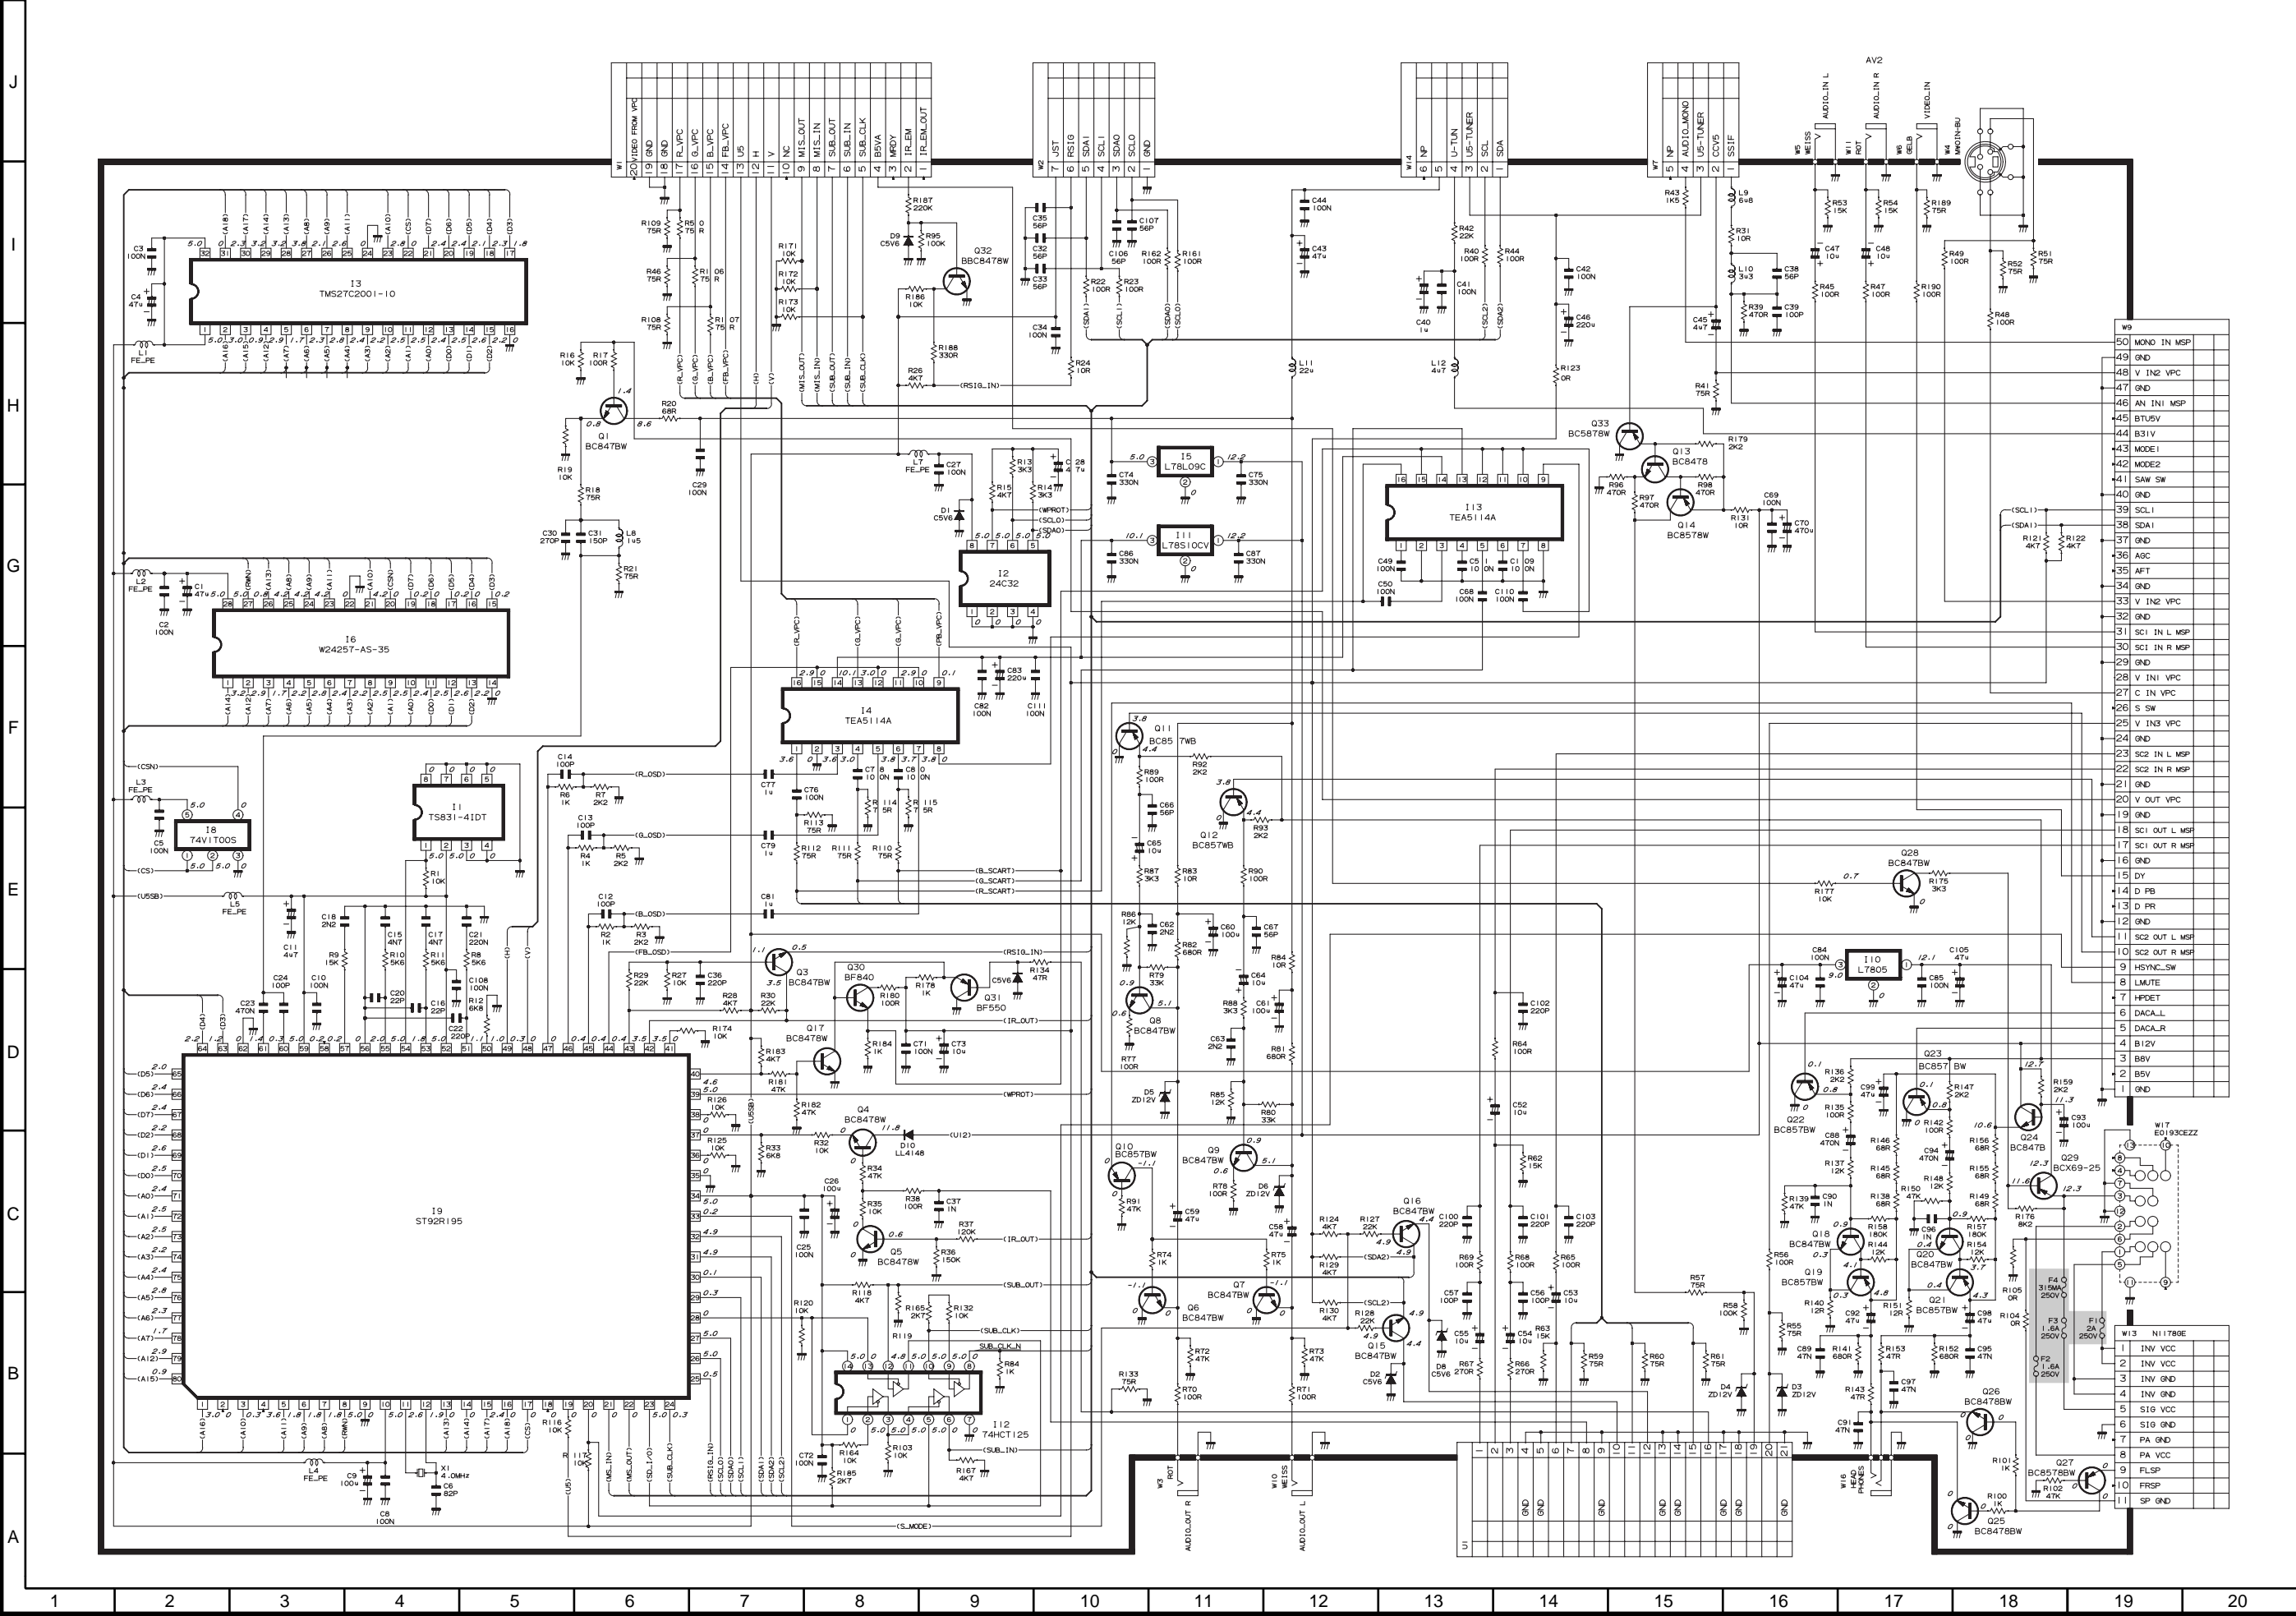

PRINTED WIRING BOARD ASSEMBLIES

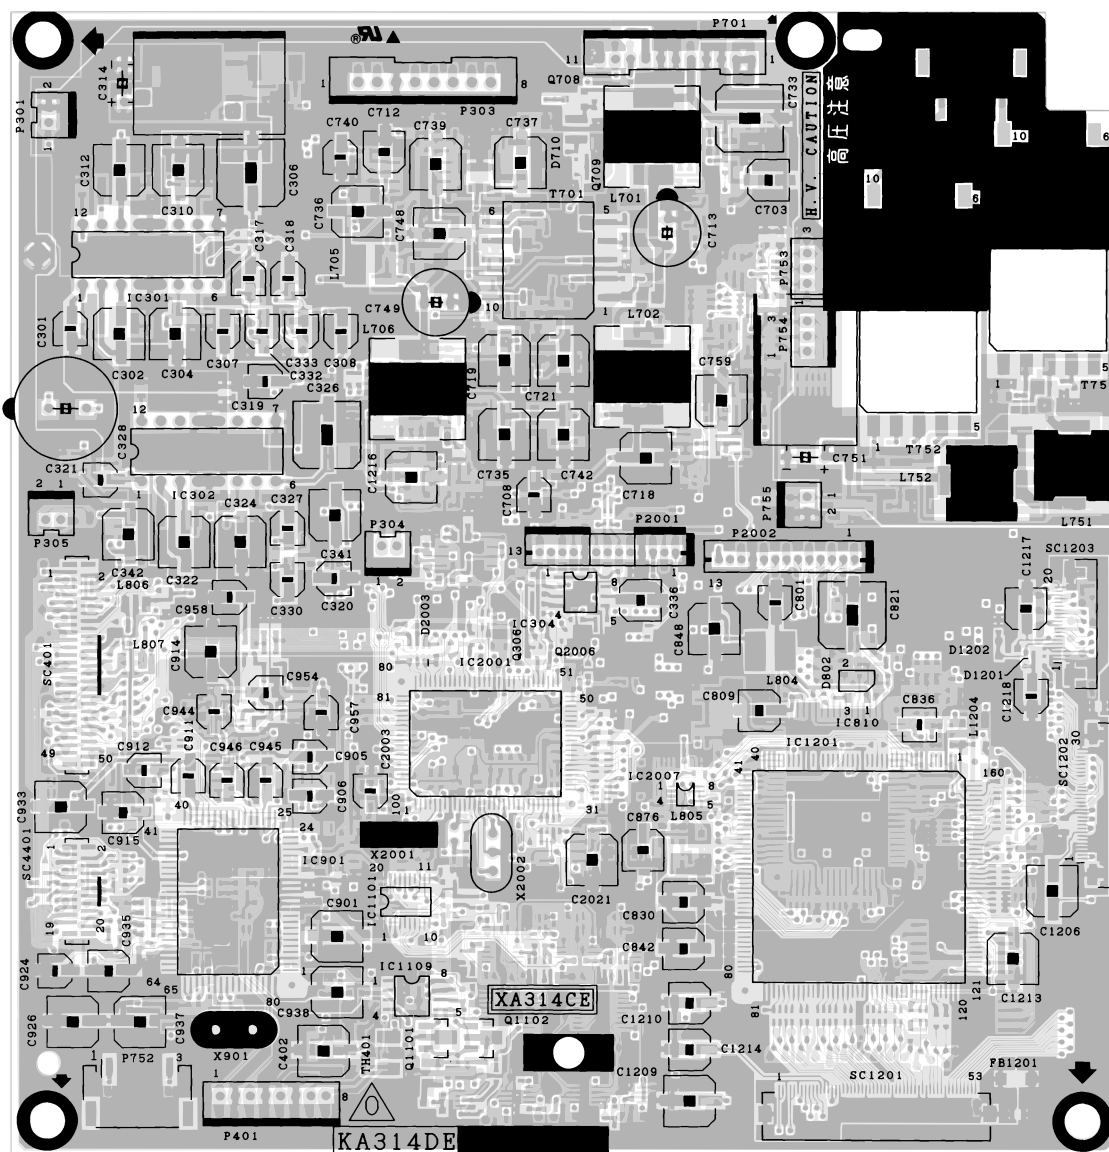

Main Unit (Side-A)



1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----



J

I

H

G

F


E

D

C

B


A

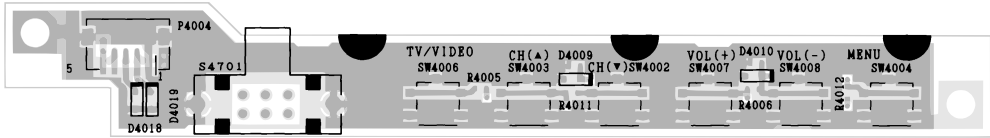


Switch Unit (Side-A)



Switch Unit (Side-B)




R/C Unit (Side-A)



R/C Unit (Side-B)

PARTS LIST

PARTS REPLACEMENT

Replacement parts which have these special safety characteristics identified in this manual: electrical components having such features are identified by “” and shaded area in the Replacement Parts Lists and schematic diagrams.

The use of a substitute replacement part which does not have the same safety characteristics as the factory recommended replacement parts shown in this service manual may create shock, fire or other hazards.

“HOW TO ORDER REPLACEMENT PARTS”

To have your order filled promptly and correctly, please furnish the following informations.

- | | |
|-----------------|----------------|
| 1. MODEL NUMBER | 2. REF. NO. |
| 3. PART NO. | 4. DESCRIPTION |

MARK★: SPARE PARTS-DELIVERY SECTION

Ref. No.	Part No.	★	Description	Code
LCD UNIT				
	RLCDDT0058CEZZ	J	LCD Unit	DQ

LAMP UNIT

	KLMP-0098CEZZ	J	Lamp Unit	BA
---	---------------	---	-----------	----

PRINTED WIRING BOARD ASSEMBLIES (NOT REPLACEMENT ITEM)

DUNTKA314DE01	– Main PWB Unit	—
DUNTKA315DE01	– Switch PWB Unit	—
DUNTKA316DE01	– R/C PWB Unit	—

PRINTED WIRING BOARD ASSEMBLY

RUNTK0691CEZZ	J	Tuner PWB Unit	CG
---------------	---	----------------	----

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

DUNTKA314DE01 MAIN PWB UNIT

INTEGRATED CIRCUITS

IC201	VHiNJM2147M-1	J	NJM2147M	AF
IC301	VHiLA4227/-1	J	LA4227	AG
IC302	VHiLA4227/-1	J	LA4227	AG
IC303	VHiNJM2283F-1	J	NJM2283F	AF
IC402	VHiNJM2235M-1	J	NJM2235M	AE
IC701	VHiAN8005M/-1	J	AN8005M	AD
IC702	VHiNJM2377M-1	J	NJM2377M	AK
IC704	VHiBA033FP/-1	J	BA033FP	AG
IC802	VHiVPC3230D-1	J	VPC3230D	BG
IC901	RH-iX3371CEZZ	J	IX3371CE	BD
IC902	VHiNJM4560M-1	J	NJM4560M	AG
IC903	VHiNJM4560M-1	J	NJM4560M	AG
IC1101	VHiMB8346BV-1	J	MB8346BV	AN
IC1102	VHiNJM4565V-1	J	NJM4565V	AF
IC1103	VHiNJM4565V-1	J	NJM4565V	AF
IC1104	VHiNJM4565V-1	J	NJM4565V	AF
IC1105	VHiBU4053V/-1	J	BU4053V	AE
IC1106	VHiNJM4580V-1	J	NJM4580V	AE
IC1107	VHiNJM4580V-1	J	NJM4580V	AE
IC1108	VHiNJM4580V-1	J	NJM4580V	AE
IC1109	VHiNJM353M/-1	J	NJM353M	AG
IC1110	VHiBU4053V/-1	J	BU4053V	AE
IC1201	RH-iX3378CEZZ	J	IX3378CE	AY
IC1202	VHiPD485505-2	J	PD485505	AY
IC2001	RH-iX3483CEN1	J	IX3483CE	BK
IC2002	VHiPST529DM-1	J	PST529DM	AE
IC2004	VHiBR24C08F-1	J	BR24C08F	AF
IC2005	VHiBA7046F/-1	J	BA7046F	AF
IC2006	VHiTC7W04U/-1	J	TC7W04U	AD
IC2007	VHiTC4W53U/-1	J	TC4W53U	AF

TRANSISTORS

Q201	VS2SC2712Y/-1	J	2SC2712Y	AB
Q202	VS2SC2712Y/-1	J	2SC2712Y	AB
Q203	VSFMY3/////1	J	FMY3	AB
Q204	VS2SC2712Y/-1	J	2SC2712Y	AB
Q302	VS2SA1162Y/-1	J	2SA1162Y	AB
Q303	VS2TC314TK/-1	J	DTC314TK	AC
Q304	VS2TC314TK/-1	J	DTC314TK	AC
Q305	VS2TC314TK/-1	J	DTC314TK	AC
Q308	VS2TC144EE/-1	J	DTC144EE	AA
Q701	VS2SA1162Y/-1	J	2SA1162Y	AB
Q702	VS2SK2503/-1	J	2SK2503	AE
Q703	VS2SC2712Y/-1	J	2SC2712Y	AB
Q707	VS2TC144EE/-1	J	DTC144EE	AA
Q708	VSFMMT718/-1	J	FMMT718	AE
Q709	VS2TC144EE/-1	J	DTC144EE	AA
Q710	VS2SA1162Y/-1	J	2SA1162Y	AB
Q751	VSFZT1053A/-1	J	FZT1053A	AG
Q752	VSFZT1053A/-1	J	FZT1053A	AG
Q753	VS2SA1162Y/-1	J	2SA1162Y	AB
Q754	VS2TC114YE/-1	J	DTC114YE	AB
Q757	VSUPA606T/-1	J	UPA606T	AD
Q1101	VS2SA1729/-1	J	2SA1729	AF
Q1102	VS2SC4520/-1	J	2SC4520	AE
Q1201	VS2TC144EE/-1	J	DTC144EE	AA
Q2003	VS2SC2712Y/-1	J	2SC2712Y	AB
Q2004	VS2TC144EE/-1	J	DTC144EE	AA
Q2005	VS2TA144EE/-1	J	DTA144EE	AA
Q2006	VS2TC144EE/-1	J	DTC144EE	AA

DIODES

D201	VHDDAN222/-1	J	DAN222	AA
D702	VHDSFPB56//2E	J	SFPB56	AC
D703	VHD1SS250//1E	J	1SS250	AB
D704	VHD1SS250//1E	J	1SS250	AB
D705	VHDDAN222/-1	J	DAN222	AA
D706	VHDSFPB74//2E	J	SFPB74	AD
D707	VHDDAN222/-1	J	DAN222	AA
D709	VHDDAN222/-1	J	DAN222	AA
D710	VHDDAN222/-1	J	DAN222	AA

Ref. No.	Part No.	★	Description	Code
DUNTKA314DE01 MAIN PWB UNIT(Continued)				
D712	VHDDAN222/-1	J	DAN222	AA
D753	VHDI MN10///-1	J	IMN10	AB
D754	VHDI MN10///-1	J	IMN10	AB
D1101	VHD1SS250//1E	J	1SS250	AB
D1201	VHDDAN222/-1	J	DAN222	AA
D1202	RH-EX0227CEZZ	J	Zener Diode	AB
PACKAGED CIRCUITS				
X801	RCRSC0012CEZZ	J	Crystal, CRSC0012CE	AH
X901	RCRSB0250GEZZ	J	Crystal, CRSB0250GE	AG
FILTER				
X2002	RFILA0107CEZZ	J	Filter, FiLA0107CE	AD
COILS				
L701	RCiLC0130CEZZ	J	Coil, CiLC0130CE	AG
L705	RCiLC0057CEZZ	J	Coil, CiLC0057CE	AD
L706	RCiLC0130CEZZ	J	Coil, CiLC0130CE	AG
L751	RCiLC0107CEZZ	J	Coil, CiLC0107CE	AF
L752	RCiLC0107CEZZ	J	Coil, CiLC0107CE	AF
L803	VP-1M4R7J1R2N	J	Peaking, 4.7μH	AB
L804	RCiLC0055CEZZ	J	Coil, CiLC0055CE	AD
L805	RCiLC0055CEZZ	J	Coil, CiLC0055CE	AD
L806	VP-1M4R7J1R2N	J	Peaking, 4.7μH	AB
L807	VP-1M4R7J1R2N	J	Peaking, 4.7μH	AB
L901	VP-1M4R7J1R2N	J	Peaking, 4.7μH	AB
L902	VP-1M101J7R7N	J	Peaking, 100μH	AC
L1202	VP-1M470J5R4N	J	Peaking, 47μH	AC
L1203	VP-1M220J2R9N	J	Peaking, 22μH	AC
L1204	VP-1M220J2R9N	J	Peaking, 22μH	AC
L1205	VP-1M220J2R9N	J	Peaking, 22μH	AC
TRANSFORMERES				
⚠ T701	RTRNZ0778CEZZ	J	Transformer	AM
⚠ T751	RTRNZ0777CEZZ	J	Transformer	AM
⚠ T752	RTRNZ0777CEZZ	J	Transformer	AM
CAPACITORS				
C201	VCKYTV1HF104Z	J	0.1 50V Ceramic	AA
C202	VCKYCY1EF104Z	J	0.1 25V Ceramic	AA
C203	RC-KZ1025CEZZ	J	1 10V Ceramic	AB
C204	RC-KZ1025CEZZ	J	1 10V Ceramic	AB
C205	VCKYCY1EF104Z	J	0.1 25V Ceramic	AA
C206	VCKYCY1HF103Z	J	0.01 50V Ceramic	AA
C301	VCEAPF1CN106M	J	10 16V Electrolytic	AD
C302	VCEAPF1CN107M	J	100 16V Electrolytic	AD
C303	VCKYCY1EF104Z	J	0.1 25V Ceramic	AA
C304	VCEAPF1CN476M	J	47 16V Electrolytic	AD
C305	VCKYCY1HB102K	J	1000p 50V Ceramic	AA
C306	VCEAPW1CN477M	J	470 16V Electrolytic	AE
C307	VCEAPF1HN225M	J	2.2 50V Electrolytic	AD
C308	VCEAPF1HN225M	J	2.2 50V Electrolytic	AD
C309	VCKYCY1HB102K	J	1000p 50V Ceramic	AA
C310	VCEAPF1CN476M	J	47 16V Electrolytic	AD
C311	VCKYCY1EF104Z	J	0.1 25V Ceramic	AA
C312	VCEAPF1CN107M	J	100 16V Electrolytic	AD
C313	VCKYTV1CF105Z	J	1 16V Ceramic	AB
C314	VCEA4U1CN228M	J	2200 16V Electrolytic	AE
C316	VCKYCY1EF104Z	J	0.1 25V Ceramic	AA
C317	VCEAPF1HN105M	J	1 50V Electrolytic	AD
C318	VCEAPF1HN105M	J	1 50V Electrolytic	AD
C319	VCEAPF0JN226M	J	22 6.3V Electrolytic	AD
C320	VCEAPF0JN226M	J	22 6.3V Electrolytic	AD
C321	VCEAPF1CN106M	J	10 16V Electrolytic	AD
C322	VCEAPF1CN107M	J	100 16V Electrolytic	AD
C323	VCKYCY1EF104Z	J	0.1 25V Ceramic	AA
C324	VCEAPF1CN107M	J	100 16V Electrolytic	AD
C325	VCKYCY1CB273K	J	0.027 16V Ceramic	AA
C326	VCEAPW1CN477M	J	470 16V Electrolytic	AE
C327	VCEAPF1HN105M	J	1 50V Electrolytic	AD
C328	RC-EZ1274CEZZ	J	100 16V Electrolytic	AD

Ref. No.	Part No.	★	Description	Code
C329	VCKYTV1CF105Z	J	1 16V Ceramic	AB
C330	VCEAPF1HN225M	J	2.2 50V Electrolytic	AD
C341	RC-EZ0417CEZZ	J	150 16V Electrolytic	AD
C342	RC-EZ0417CEZZ	J	150 16V Electrolytic	AD
C403	VCKYTV1AB105K	J	1 10V Ceramic	AD
C404	VCKYTV1AB105K	J	1 10V Ceramic	AD
C406	VCKYCY1EF104Z	J	0.1 25V Ceramic	AA
C408	VCCCCY1HH271J	J	270p 50V Ceramic	AA
C409	VCCCCY1HH271J	J	270p 50V Ceramic	AA
C411	VCCCCY1HH331J	J	330p 50V Ceramic	AA
C701	VCCCCY1HH471J	J	470p 50V Ceramic	AA
C702	VCKYTV1CF105Z	J	1 16V Ceramic	AB
C703	VCEAPF1CN226M	J	22 16V Electrolytic	AD
C704	VCKYTV1CF105Z	J	1 16V Ceramic	AB
C706	VCKYCY1HB562K	J	5600p 50V Ceramic	AA
C707	VCKYCY1CF334Z	J	0.33 16V Ceramic	AA
C708	VCEAPF0JN226M	J	22 6.3V Electrolytic	AD
C710	VCKYTV1CF105Z	J	1 16V Ceramic	AB
C711	VCKYCY1EB103K	J	0.01 25V Ceramic	AA
C712	VCEAPT1CN226M	J	22 16V Electrolytic	AC
C713	RC-EZ1176CEZZ	J	100 16V Electrolytic	AK
C716	VCKYTV1CF105Z	J	1 16V Ceramic	AB
C719	RC-EZ0420CEZZ	J	100 25V Electrolytic	AE
C721	VCEASD1HN336M	J	33 50V Electrolytic	AD
C722	VCKYTV1HF104Z	J	0.1 50V Ceramic	AA
C728	VCKYTV1HF104Z	J	0.1 50V Ceramic	AA
C729	VCKYTV1CF105Z	J	1 16V Ceramic	AB
C731	VCCCCY1HH181J	J	180p 50V Ceramic	AA
C733	RC-EZ0538CEZZ	J	330 16V Electrolytic	AE
C734	VCKYTV1CF105Z	J	1 16V Ceramic	AB
C735	RC-EZ0416CEZZ	J	330 6.3V Electrolytic	AD
C736	RC-EZ0416CEZZ	J	330 6.3V Electrolytic	AD
C737	RC-EZ1339CEZZ	J	220 16V Electrolytic	AD
C738	RC-KZ1025CEZZ	J	1 10V Ceramic	AB
C740	VCEAPF1EN475M	J	4.7 25V Electrolytic	AC
C741	VCKYTV1CF105Z	J	1 16V Ceramic	AB
C746	VCKYCY1EF104Z	J	0.1 25V Ceramic	AA
C747	VCKYTV1HB562K	J	5600p 50V Ceramic	AA
C748	RC-EZ1339CEZZ	J	220 16V Electrolytic	AD
C749	RC-EZ1177CEZZ	J	150 6.3V Electrolytic	AH
C751	VCEA4U1CN228M	J	2200 16V Electrolytic	AE
C752	RC-FZ0174CEZZ	J	0.12 100V Mylar	AG
C757	VCKYCY1CB823K	J	0.082 16V Ceramic	AH
C759	VCEAPF0JN107M	J	100 6.3V Electrolytic	AD
C762	RC-FZ0174CEZZ	J	0.12 100V Mylar	AG
C764	VCKYTV1CF105Z	J	1 16V Ceramic	AB
C765	VCKYTV1CF105Z	J	1 16V Ceramic	AB
C801	VCEAPF1CN106M	J	10 16V Electrolytic	AD
C802	VCKYCY1EF104Z	J	0.1 25V Ceramic	AA
C803	VCCCCY1HH7R0D	J	7p 50V Ceramic	AA
C804	VCCCCY1HH7R0D	J	7p 50V Ceramic	AA
C805	RC-KZ1025CEZZ	J	1 10V Ceramic	AB
C806	RC-KZ1025CEZZ	J	1 10V Ceramic	AB
C809	VCEAPF0GW107M	J	100 4V Electrolytic	AC
C810	VCKYCY1EF104Z	J	0.1 25V Ceramic	AA
C811	VCCCCY1HH271J	J	270p 50V Ceramic	AA
C812	RC-KZ1025CEZZ	J	1 10V Ceramic	AB
C813	RC-KZ1025CEZZ	J	1 10V Ceramic	AB
C814	VCKYCY1HB102K	J	1000p 50V Ceramic	AA
C815	VCKYTV1CF684Z	J	0.68 16V Ceramic	AB
C816	VCKYTV1CF684Z	J	0.68 16V Ceramic	AB
C817	VCKYTV1CF684Z	J	0.68 16V Ceramic	AB
C818	RC-KZ1025CEZZ	J	1 10V Ceramic	AB
C819	RC-KZ1025CEZZ	J	1 10V Ceramic	AB
C820	VCKYCY1EF104Z	J	0.1 25V Ceramic	AA
C821	VCEAPW1CN477M	J	470 16V Electrolytic	AE
C822	RC-KZ1025CEZZ	J	1 10V Ceramic	AB
C825	RC-KZ1025CEZZ	J	1 10V Ceramic	AB
C830	VCEAPF0GW107M	J	100 4V Electrolytic	AC
C831	VCKYCY1EF104Z	J	0.1 25V Ceramic	AA
C839	VCKYCY1CF224Z	J	0.22 16V Ceramic	AA
C840	VCKYCY1CF224Z	J	0.22 16V Ceramic	AA
C841	VCKYCY1CF224Z	J	0.22 16V Ceramic	AA
C842	VCEAPF0GW107M	J	100 4V Electrolytic	AC
C844	VCKYCY1EF104Z	J	0.1 25V Ceramic	AA

Ref. No.	Part No.	★	Description	Code
DUNTKA314DE01 MAIN PWB UNIT(Continued)				
C848	VCEAPF0JW107M	J 100	6.3V Electrolytic	AC
C874	RC-KZ1025CEZZ	J 1	10V Ceramic	AB
C875	RC-KZ1025CEZZ	J 1	10V Ceramic	AB
C876	VCEAPF0GW107M	J 100	4V Electrolytic	AC
C878	RC-KZ1025CEZZ	J 1	10V Ceramic	AB
C882	VCKYTV1CF684Z	J 0.68	16V Ceramic	AB
C902	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C905	VCEAPF1CW106M	J 10	16V Electrolytic	AB
C906	VCEAPF1CW106M	J 10	16V Electrolytic	AB
C907	VCKYCY1HB102K	J 1000p	50V Ceramic	AA
C909	VCKYCY1HB682K	J 6800p	50V Ceramic	AA
C910	VCKYCY1HB682K	J 6800p	50V Ceramic	AA
C911	VCEAPF1CW106M	J 10	16V Electrolytic	AB
C912	VCEAPF1CW106M	J 10	16V Electrolytic	AB
C913	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C914	RC-EZ0417CEZZ	J 150	16V Electrolytic	AD
C915	VCEAPF0JW336M	J 33	6.3V Electrolytic	AB
C916	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C919	RC-KZ1025CEZZ	J 1	10V Ceramic	AB
C920	RC-KZ1025CEZZ	J 1	10V Ceramic	AB
C921	RC-KZ1025CEZZ	J 1	10V Ceramic	AB
C922	RC-KZ1025CEZZ	J 1	10V Ceramic	AB
C923	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C924	VCEAPF1CW106M	J 10	16V Electrolytic	AB
C925	RC-KZ1025CEZZ	J 1	10V Ceramic	AB
C927	VCCCCY1HH560J	J 56p	50V Ceramic	AA
C928	VCCCCY1HH560J	J 56p	50V Ceramic	AA
C929	VCCCCY1HH560J	J 56p	50V Ceramic	AA
C930	VCCCCY1HH5R0C	J 5p	50V Ceramic	AA
C931	VCCCCY1HH5R0C	J 5p	50V Ceramic	AA
C932	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C933	RC-EZ0417CEZZ	J 150	16V Electrolytic	AD
C935	VCEAPF1CW226M	J 22	16V Electrolytic	AB
C937	RC-EZ0417CEZZ	J 150	16V Electrolytic	AD
C938	RC-EZ0417CEZZ	J 150	16V Electrolytic	AD
C939	VCKYCY1HB561K	J 560p	50V Ceramic	AA
C940	VCKYCY1HB152K	J 1500p	50V Ceramic	AA
C941	VCKYCY1HB152K	J 1500p	50V Ceramic	AA
C942	VCKYCY1HB561K	J 560p	50V Ceramic	AA
C943	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C944	VCEAPF1CW106M	J 10	16V Electrolytic	AB
C945	VCEAPF1HW225M	J 2.2	50V Electrolytic	AB
C946	VCEAPF1HW225M	J 2.2	50V Electrolytic	AB
C954	VCEAPF1CW106M	J 10	16V Electrolytic	AB
C955	VCKYTV1CF105Z	J 1	16V Ceramic	AB
C956	VCKYTV1CF105Z	J 1	16V Ceramic	AB
C957	VCEAPF1EN475M	J 4.7	25V Electrolytic	AC
C958	VCEAPF1EN475M	J 4.7	25V Electrolytic	AC
C961	VCKYCY1HB102K	J 1000p	50V Ceramic	AA
C962	VCKYCY1HB102K	J 1000p	50V Ceramic	AA
C963	VCKYCY1HB102K	J 1000p	50V Ceramic	AA
C964	VCKYCY1HB102K	J 1000p	50V Ceramic	AA
C1101	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1102	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1103	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1104	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1105	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1106	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1107	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1108	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1109	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1110	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1111	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1112	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1113	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1114	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1115	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1116	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1117	VCCCCY1HH560J	J 56p	50V Ceramic	AA
C1118	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1119	VCKYTV1CF105Z	J 1	16V Ceramic	AB
C1120	VCKYTV1EF104Z	J 0.1	25V Ceramic	AB

Ref. No.	Part No.	★	Description	Code
C1122	VCKYTV1CF105Z	J 1	16V Ceramic	AB
C1123	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1124	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1202	VCKYCY1HB103K	J 0.01	50V Ceramic	AA
C1203	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1204	VCCCCY1HH220J	J 22p	50V Ceramic	AA
C1205	VCCCCY1HH220J	J 22p	50V Ceramic	AA
C1206	VCEAPF1HN106M	J 10	50V Electrolytic	AD
C1207	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1209	VCEAPF0JW107M	J 100	6.3V Electrolytic	AC
C1210	VCEAPF0GW107M	J 100	4V Electrolytic	AC
C1211	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1212	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C1213	VCEAPF0JW107M	J 100	6.3V Electrolytic	AC
C1214	VCEAPF0GW107M	J 100	4V Electrolytic	AC
C1215	RC-KZ1025CEZZ	J 1	10V Ceramic	AB
C1217	VCEAPF1CW226M	J 22	16V Electrolytic	AB
C1218	VCEAPF1CN106M	J 10	16V Electrolytic	AD
C2001	VCKYCY1HB102K	J 1000p	50V Ceramic	AA
C2002	VCCCCY1HH221J	J 220p	50V Ceramic	AA
C2003	VCEAPF1HW105M	J 1	50V Electrolytic	AB
C2006	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C2007	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C2009	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C2010	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C2015	VCKYCY1HB561K	J 560p	50V Ceramic	AA
C2016	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C2017	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C2018	VCCCCY1HH101J	J 100p	50V Ceramic	AA
C2019	VCKYTV1AB105K	J 1	10V Ceramic	AD
C2020	VCKYCY1HB102K	J 1000p	50V Ceramic	AA
C2021	VCEAPF1AW476M	J 47	10V Electrolytic	AB
C2022	VCKYCY1EF104Z	J 0.1	25V Ceramic	AA
C2023	VCKYTV1AB105K	J 1	10V Ceramic	AD
C2024	VCKYCY1HB222K	J 2200p	50V Ceramic	AA
C2026	VCCCCY1HH470J	J 47p	50V Ceramic	AA

RESISTORS

R201	VRS-CY1JF102J	J 1k	1/16W Metal Oxide	AA
R202	VRS-CY1JF103F	J 10k	1/16W Metal Oxide	AA
R203	VRS-CY1JF102F	J 1k	1/16W Metal Oxide	AA
R204	VRS-CY1JF473F	J 47k	1/16W Metal Oxide	AA
R205	VRS-CY1JF103J	J 10k	1/16W Metal Oxide	AA
R206	VRS-CY1JF103F	J 10k	1/16W Metal Oxide	AA
R207	VRS-CY1JF622F	J 6.2k	1/16W Metal Oxide	AA
R208	VRS-CY1JF473F	J 47k	1/16W Metal Oxide	AA
R209	VRS-CY1JF123F	J 12k	1/16W Metal Oxide	AA
R210	VRS-CY1JF242F	J 2.4k	1/16W Metal Oxide	AA
R211	VRS-CY1JF332F	J 3.3k	1/16W Metal Oxide	AA
R212	VRS-CY1JF332F	J 3.3k	1/16W Metal Oxide	AA
R213	VRS-CY1JF682F	J 6.8k	1/16W Metal Oxide	AA
R214	VRS-CY1JF122F	J 1.2k	1/16W Metal Oxide	AA
R215	VRS-CY1JF102J	J 1k	1/16W Metal Oxide	AA
R216	VRS-CY1JF153J	J 15k	1/16W Metal Oxide	AA
R217	VRS-CY1JF102J	J 1k	1/16W Metal Oxide	AA
R218	VRS-CY1JF391J	J 390	1/16W Metal Oxide	AA
R219	VRS-TV1JD103J	J 10k	1/16W Metal Oxide	AA
R220	VRS-CY1JF102J	J 1k	1/16W Metal Oxide	AA
R301	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R302	VRS-TX2HF8R2J	J 8.2	1/2W Metal Oxide	AA
R303	VRS-CY1JF331J	J 330	1/16W Metal Oxide	AA
R304	VRS-CY1JF331J	J 330	1/16W Metal Oxide	AA
R305	VRS-TX2HF8R2J	J 8.2	1/2W Metal Oxide	AA
R308	VRS-CY1JF223J	J 22k	1/16W Metal Oxide	AA
R309	VRS-TW2ED222J	J 2.2k	1/4W Metal Oxide	AA
R313	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R314	VRS-CY1JF512J	J 5.1k	1/16W Metal Oxide	AA
R315	VRS-CY1JF242J	J 2.4k	1/16W Metal Oxide	AA
R316	VRS-CY1JF512J	J 5.1k	1/16W Metal Oxide	AA
R317	VRS-CY1JF242J	J 2.4k	1/16W Metal Oxide	AA
R318	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R319	VRS-TX2HF8R2J	J 8.2	1/2W Metal Oxide	AA
R320	VRS-CY1JF150J	J 15	1/16W Metal Oxide	AA
R321	VRS-CY1JF242J	J 2.4k	1/16W Metal Oxide	AA
R322	VRS-CY1JF472J	J 4.7k	1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
DUNTKA314DE01 MAIN PWB UNIT(Continued)					R747	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R323	VRS-CY1JF472J	J 4.7k	1/16W Metal Oxide	AA	R748	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R324	VRS-CY1JF472J	J 4.7k	1/16W Metal Oxide	AA	R751	VRS-TW2ED332J	J 3.3k	1/4W Metal Oxide	AB
R327	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA	R752	VRS-TW2ED332J	J 3.3k	1/4W Metal Oxide	AB
R328	VRS-CY1JF104J	J 100k	1/16W Metal Oxide	AA	R753	VRS-CY1JF333J	J 33k	1/16W Metal Oxide	AA
R329	VRS-CY1JF104J	J 100k	1/16W Metal Oxide	AA	R754	VRS-CY1JF103J	J 10k	1/16W Metal Oxide	AA
R330	VRS-CY1JF104J	J 100k	1/16W Metal Oxide	AA	R765	VRS-CY1JF103J	J 10k	1/16W Metal Oxide	AA
R331	VRS-CY1JF6R8J	J 6.8	1/16W Metal Oxide	AA	R766	VRS-CA1JF821J	J 820	1/16W Metal Oxide	AA
R333	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA	R768	VRS-CA1JF104J	J 100k	1/16W Metal Oxide	AA
R335	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA	R770	VRS-CA1JF562J	J 5.6k	1/16W Metal Oxide	AA
R337	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA	R772	VRS-CY1JF563J	J 56k	1/16W Metal Oxide	AA
R338	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA	R774	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R341	VRS-CA1JF000J	J 0	1/16W Metal Oxide	AB	R801	VRS-CB1JF221J	J 220	1/16W Metal Oxide	AC
R343	VRS-CA1JF000J	J 0	1/16W Metal Oxide	AB	R802	VRS-CB1JF220J	J 22	1/16W Metal Oxide	AC
R347	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA	R803	VRS-CB1JF220J	J 22	1/16W Metal Oxide	AC
R401	VRS-CY1JF101J	J 100	1/16W Metal Oxide	AA	R804	VRS-CA1JF101J	J 100	1/16W Metal Oxide	AA
R402	VRS-CY1JF270J	J 27	1/16W Metal Oxide	AA	R806	VRS-CY1JF221J	J 220	1/16W Metal Oxide	AA
R403	VRS-CY1JF101J	J 100	1/16W Metal Oxide	AA	R809	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R404	VRS-CY1JF101J	J 100	1/16W Metal Oxide	AA	R810	VRS-CB1JF220J	J 22	1/16W Metal Oxide	AC
R405	VRS-CY1JF101J	J 100	1/16W Metal Oxide	AA	R811	VRS-CY1JF222J	J 2.2k	1/16W Metal Oxide	AA
R406	VRS-CY1JF101J	J 100	1/16W Metal Oxide	AA	R812	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R407	VRS-CY1JF103J	J 10k	1/16W Metal Oxide	AA	R813	VRS-CB1JF220J	J 22	1/16W Metal Oxide	AC
R408	VRS-CY1JF103J	J 10k	1/16W Metal Oxide	AA	R814	VRS-CY1JF332J	J 3.3k	1/16W Metal Oxide	AA
R409	VRS-CY1JF270J	J 27	1/16W Metal Oxide	AA	R815	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R410	VRS-CY1JF101J	J 100	1/16W Metal Oxide	AA	R816	VRS-CA1JF470J	J 47	1/16W Metal Oxide	AB
R411	VRS-CY1JF101J	J 100	1/16W Metal Oxide	AA	R819	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R412	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA	R820	VRS-CA1JF102J	J 1k	1/16W Metal Oxide	AA
R424	VRS-CY1JF101J	J 100	1/16W Metal Oxide	AA	R821	VRS-CY1JF102J	J 1k	1/16W Metal Oxide	AA
R430	VRS-CA1JF101J	J 100	1/16W Metal Oxide	AA	R822	VRS-CY1JF101J	J 100	1/16W Metal Oxide	AA
R434	VRS-CY1JF105J	J 1M	1/16W Metal Oxide	AA	R826	VRS-CY1JF101J	J 100	1/16W Metal Oxide	AA
R435	VRS-CY1JF105J	J 1M	1/16W Metal Oxide	AA	R852	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R436	VRS-CY1JF105J	J 1M	1/16W Metal Oxide	AA	R860	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R437	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA	R861	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R457	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA	R862	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R458	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA	R863	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R461	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA	R864	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R701	VRS-CY1JF1R0J	J 1	1/16W Metal Oxide	AA	R865	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R702	VRS-CY1JF154J	J 150k	1/16W Metal Oxide	AA	R866	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R703	VRS-CY1JF274J	J 270k	1/16W Metal Oxide	AA	R867	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R704	VRS-TQ2BD000J	J 0	1/8W Metal Oxide	AA	R901	VRS-CY1JF101J	J 100	1/16W Metal Oxide	AA
R705	VRS-TX2HF000J	J 0	1/2W Metal Oxide	AA	R902	VRS-CY1JF101J	J 100	1/16W Metal Oxide	AA
R706	VRS-CR3AD821J	J 820	1W Metal Oxide	AC	R903	VRS-CY1JF101J	J 100	1/16W Metal Oxide	AA
R707	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA	R905	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R708	VRS-CY1JF272F	J 2.7k	1/16W Metal Oxide	AA	R908	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R709	VRS-CY1JF123F	J 12k	1/16W Metal Oxide	AA	R909	VRS-CY1JF102J	J 1k	1/16W Metal Oxide	AA
R711	VRS-CY1JF184J	J 180k	1/16W Metal Oxide	AA	R910	VRS-CY1JF102J	J 1k	1/16W Metal Oxide	AA
R712	VRS-CY1JF683F	J 68k	1/16W Metal Oxide	AA	R913	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R713	VRS-CY1JF133F	J 13k	1/16W Metal Oxide	AA	R914	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R715	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA	R915	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R716	VRS-TX2HF000J	J 0	1/2W Metal Oxide	AA	R916	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R717	VRS-CY1JF152F	J 1.5k	1/16W Metal Oxide	AA	R917	VRS-CY1JF105J	J 1M	1/16W Metal Oxide	AA
R718	VRS-CY1JF274J	J 270k	1/16W Metal Oxide	AA	R918	VRS-CY1JF822F	J 8.2k	1/16W Metal Oxide	AA
R719	VRS-CY1JF563F	J 56k	1/16W Metal Oxide	AA	R919	VRS-CY1JF822F	J 8.2k	1/16W Metal Oxide	AA
R720	VRS-CY1JF473J	J 47k	1/16W Metal Oxide	AA	R920	VRS-CY1JF822F	J 8.2k	1/16W Metal Oxide	AA
R721	VRS-CY1JF103J	J 10k	1/16W Metal Oxide	AA	R921	VRS-CY1JF822F	J 8.2k	1/16W Metal Oxide	AA
R722	VRS-CY1JF105J	J 1M	1/16W Metal Oxide	AA	R922	VRS-CY1JF223J	J 22k	1/16W Metal Oxide	AA
R723	VRS-CY1JF682J	J 6.8k	1/16W Metal Oxide	AA	R923	VRS-CY1JF223J	J 22k	1/16W Metal Oxide	AA
R724	VRS-TQ2BD000J	J 0	1/8W Metal Oxide	AA	R924	VRS-CY1JF473J	J 47k	1/16W Metal Oxide	AA
R725	VRS-CY1JF1R0J	J 1	1/16W Metal Oxide	AA	R925	VRS-CY1JF473J	J 47k	1/16W Metal Oxide	AA
R726	VRS-CY1JF1R0J	J 1	1/16W Metal Oxide	AA	R951	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R729	VRS-TQ2BD000J	J 0	1/8W Metal Oxide	AA	R954	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA
R731	VRS-TQ2BD000J	J 0	1/8W Metal Oxide	AA	R958	VRS-CY1JF104J	J 100k	1/16W Metal Oxide	AA
R732	VRS-TW2ED222J	J 2.2k	1/4W Metal Oxide	AA	R959	VRS-CY1JF104J	J 100k	1/16W Metal Oxide	AA
R733	VRS-TQ2BD683J	J 68k	1/8W Metal Oxide	AA	R960	VRS-CY1JF104J	J 100k	1/16W Metal Oxide	AA
R734	VRS-CY1JF393J	J 39k	1/16W Metal Oxide	AA	R961	VRS-CY1JF104J	J 100k	1/16W Metal Oxide	AA
R735	VRS-CY1JF223J	J 22k	1/16W Metal Oxide	AA	R962	VRS-CY1JF153J	J 15k	1/16W Metal Oxide	AA
R736	VRS-CY1JF1R0J	J 1	1/16W Metal Oxide	AA	R963	VRS-CY1JF223J	J 22k	1/16W Metal Oxide	AA
R737	VRS-CY1JF472J	J 4.7k	1/16W Metal Oxide	AA	R964	VRS-CY1JF473J	J 47k	1/16W Metal Oxide	AA
R738	VRS-TW2ED102J	J 1k	1/4W Metal Oxide	AA	R965	VRS-CY1JF473J	J 47k	1/16W Metal Oxide	AA
R739	VRS-CY1JF102J	J 1k	1/16W Metal Oxide	AA	R966	VRS-CY1JF153J	J 15k	1/16W Metal Oxide	AA
R740	VRS-CY1JF102J	J 1k	1/16W Metal Oxide	AA	R967	VRS-CY1JF153J	J 15k	1/16W Metal Oxide	AA
R741	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA	R968	VRS-CY1JF472J	J 4.7k	1/16W Metal Oxide	AA
R742	VRS-CY1JF000J	J 0	1/16W Metal Oxide	AA	R969	VRS-CY1JF472J	J 4.7k	1/16W Metal Oxide	AA
					R1101	VRS-CA1JF333J	J 33k	1/16W Metal Oxide	AA
					R1102	VRS-CA1JF103J	J 10k	1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
DUNTKA314DE01 MAIN PWB UNIT(Continued)				
R1103	VRs-CA1JF103J	J 10k	1/16W Metal Oxide	AA
R1104	VRs-CA1JF333J	J 33k	1/16W Metal Oxide	AA
R1105	VRs-CY1JF104J	J 100k	1/16W Metal Oxide	AA
R1106	VRs-CA1JF333J	J 33k	1/16W Metal Oxide	AA
R1107	VRs-CA1JF103J	J 10k	1/16W Metal Oxide	AA
R1108	VRs-CA1JF103J	J 10k	1/16W Metal Oxide	AA
R1109	VRs-CA1JF333J	J 33k	1/16W Metal Oxide	AA
R1110	VRs-CY1JF104J	J 100k	1/16W Metal Oxide	AA
R1111	VRs-CY1JF104J	J 100k	1/16W Metal Oxide	AA
R1112	VRs-CY1JF103F	J 10k	1/16W Metal Oxide	AA
R1113	VRs-CA1JF333J	J 33k	1/16W Metal Oxide	AA
R1114	VRs-CY1JF103F	J 10k	1/16W Metal Oxide	AA
R1115	VRs-CY1JF102J	J 1k	1/16W Metal Oxide	AA
R1116	VRs-CY1JF102J	J 1k	1/16W Metal Oxide	AA
R1117	VRs-CY1JF102J	J 1k	1/16W Metal Oxide	AA
R1118	VRs-CY1JF823F	J 82k	1/16W Metal Oxide	AA
R1119	VRs-CY1JF472F	J 4.7k	1/16W Metal Oxide	AA
R1120	VRs-TW2ED5R6J	J 5.6	1/4W Metal Oxide	AA
R1121	VRs-CY1JF330J	J 33	1/16W Metal Oxide	AA
R1123	VRs-CY1JF330J	J 33	1/16W Metal Oxide	AA
R1124	VRs-CY1JF472F	J 4.7k	1/16W Metal Oxide	AA
R1125	VRs-TW2ED101J	J 100	1/4W Metal Oxide	AA
R1127	VRs-CY1JF000J	J 0	1/16W Metal Oxide	AA
R1129	VRs-CY1JF563F	J 56k	1/16W Metal Oxide	AA
R1130	VRs-TW2ED5R6J	J 5.6	1/4W Metal Oxide	AA
R1132	VRs-CY1JF000J	J 0	1/16W Metal Oxide	AA
R1133	VRs-CY1JF223F	J 22k	1/16W Metal Oxide	AA
R1134	VRs-CY1JF822F	J 8.2k	1/16W Metal Oxide	AA
R1135	VRs-CY1JF561J	J 560	1/16W Metal Oxide	AA
R1137	VRs-CY1JF000J	J 0	1/16W Metal Oxide	AA
R1138	VRs-CY1JF000J	J 0	1/16W Metal Oxide	AA
R1202	VRs-CB1JF220J	J 22	1/16W Metal Oxide	AC
R1203	VRs-CA1JF220J	J 22	1/16W Metal Oxide	AA
R1204	VRs-CB1JF220J	J 22	1/16W Metal Oxide	AC
R1205	VRs-CA1JF220J	J 22	1/16W Metal Oxide	AA
R1206	VRs-CB1JF220J	J 22	1/16W Metal Oxide	AC
R1207	VRs-CA1JF220J	J 22	1/16W Metal Oxide	AA
R1208	VRs-CY1JF560J	J 56	1/16W Metal Oxide	AA
R1209	VRs-CA1JF220J	J 22	1/16W Metal Oxide	AA
R1210	VRs-CY1JF220J	J 22	1/16W Metal Oxide	AA
R1211	VRs-CY1JF221J	J 220	1/16W Metal Oxide	AA
R1212	VRs-CY1JF000J	J 0	1/16W Metal Oxide	AA
R1214	VRs-CB1JF101J	J 100	1/16W Metal Oxide	AA
R1217	VRs-CY1JF101J	J 100	1/16W Metal Oxide	AA
R1218	VRs-CA1JF101J	J 100	1/16W Metal Oxide	AA
R1220	VRs-CY1JF472J	J 4.7k	1/16W Metal Oxide	AA
R1221	VRs-CB1JF332J	J 3.3k	1/16W Metal Oxide	AC
R1222	VRs-CB1JF101J	J 100	1/16W Metal Oxide	AA
R1223	VRs-CA1JF101J	J 100	1/16W Metal Oxide	AA
R1225	VRs-CY1JF472J	J 4.7k	1/16W Metal Oxide	AA
R1228	VRs-CY1JF000J	J 0	1/16W Metal Oxide	AA
R1229	VRs-CY1JF103J	J 10k	1/16W Metal Oxide	AA
R1230	VRs-CY1JF562J	J 5.6k	1/16W Metal Oxide	AA
R1232	VRs-CY1JF101J	J 100	1/16W Metal Oxide	AA
R1233	VRs-CY1JF101J	J 100	1/16W Metal Oxide	AA
R1234	VRs-CY1JF472J	J 4.7k	1/16W Metal Oxide	AA
R2001	VRs-CY1JF102J	J 1k	1/16W Metal Oxide	AA
R2003	VRs-CY1JF223J	J 22k	1/16W Metal Oxide	AA
R2004	VRs-CY1JF223J	J 22k	1/16W Metal Oxide	AA
R2007	VRs-CY1JF223J	J 22k	1/16W Metal Oxide	AA
R2008	VRs-CY1JF101J	J 100	1/16W Metal Oxide	AA
R2009	VRs-CY1JF102J	J 1k	1/16W Metal Oxide	AA
R2010	VRs-CY1JF101J	J 100	1/16W Metal Oxide	AA
R2011	VRs-CB1JF101J	J 100	1/16W Metal Oxide	AA
R2014	VRs-CA1JF103J	J 10k	1/16W Metal Oxide	AA
R2016	VRs-CA1JF223J	J 22k	1/16W Metal Oxide	AA
R2018	VRs-CA1JF101J	J 100	1/16W Metal Oxide	AA
R2019	VRs-CB1JF331J	J 330	1/16W Metal Oxide	AC
R2025	VRs-CY1JF103J	J 10k	1/16W Metal Oxide	AA
R2028	VRs-CB1JF102J	J 1k	1/16W Metal Oxide	AA
R2031	VRs-CY1JF101J	J 100	1/16W Metal Oxide	AA
R2032	VRs-CY1JF471J	J 470	1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
R2033	VRs-CY1JF105J	J 1M	1/16W Metal Oxide	AA
R2035	VRs-CY1JF102J	J 1k	1/16W Metal Oxide	AA
R2041	VRs-CA1JF101J	J 100	1/16W Metal Oxide	AA
R2042	VRs-CY1JF101J	J 100	1/16W Metal Oxide	AA
R2045	VRs-CY1JF223J	J 22k	1/16W Metal Oxide	AA
R2047	VRs-CY1JF223J	J 22k	1/16W Metal Oxide	AA
R2048	VRs-CY1JF102J	J 1k	1/16W Metal Oxide	AA
R2049	VRs-CY1JF102J	J 1k	1/16W Metal Oxide	AA
R2050	VRs-CY1JF681J	J 680	1/16W Metal Oxide	AA
R2052	VRs-CY1JF101J	J 100	1/16W Metal Oxide	AA
R2053	VRs-CY1JF104J	J 100k	1/16W Metal Oxide	AA
R2054	VRs-CY1JF333J	J 33k	1/16W Metal Oxide	AA
R2055	VRs-CY1JF103J	J 10k	1/16W Metal Oxide	AA
R2056	VRs-CY1JF101J	J 100	1/16W Metal Oxide	AA
R2057	VRs-CY1JF103J	J 10k	1/16W Metal Oxide	AA
R2058	VRs-CY1JF474J	J 470k	1/16W Metal Oxide	AA
R2059	VRs-CY1JF223J	J 22k	1/16W Metal Oxide	AA
R2060	VRs-CB1JF101J	J 100	1/16W Metal Oxide	AA
R2061	VRs-CY1JF223J	J 22k	1/16W Metal Oxide	AA
R2062	VRs-CY1JF333J	J 33k	1/16W Metal Oxide	AA
R2063	VRs-CY1JF333J	J 33k	1/16W Metal Oxide	AA
R2064	VRs-CY1JF223J	J 22k	1/16W Metal Oxide	AA
R2068	VRs-CY1JF101J	J 100	1/16W Metal Oxide	AA
R2072	VRs-CY1JF101J	J 100	1/16W Metal Oxide	AA
R2074	VRs-CY1JF000J	J 0	1/16W Metal Oxide	AA
R2075	VRs-CY1JF000J	J 0	1/16W Metal Oxide	AA
R2076	VRs-CY1JF000J	J 0	1/16W Metal Oxide	AA
R2081	VRs-CY1JF000J	J 0	1/16W Metal Oxide	AA
R2085	VRs-CY1JF000J	J 0	1/16W Metal Oxide	AA
R2086	VRs-CY1JF332J	J 3.3k	1/16W Metal Oxide	AA
R2087	VRs-CY1JF182J	J 1.8k	1/16W Metal Oxide	AA
R2088	VRs-CY1JF000J	J 0	1/16W Metal Oxide	AA
R2089	VRs-CY1JF000J	J 0	1/16W Metal Oxide	AA

BALUNES

FB702	RBLN-0051TAZZ	J Balun, BLN-0051TA	AC
FB703	RBLN-0051TAZZ	J Balun, BLN-0051TA	AC
FB704	RBLN-0051TAZZ	J Balun, BLN-0051TA	AC
FB705	RBLN-0095CEZZ	J Balun, BLN-0095CE	AD
FB706	RBLN-0051TAZZ	J Balun, BLN-0051TA	AC
FB708	RBLN-0095CEZZ	J Balun, BLN-0095CE	AD
FB709	RBLN-0090CEZZ	J Balun, BLN-0090CE	AD
FB1202	RBLN-0006TAZZ	J Balun, BLN-0006TA	AB
FB1203	RBLN-0076TAZZ	J Balun, BLN-0076TA	AC

MISCELLANEOUS PARTS

P301	QPLGN0278GEZZ	J Plug, 2Pin	AA
P304	QPLGN0278GEZZ	J Plug, 2Pin	AA
P305	QPLGN0278GEZZ	J Plug, 2Pin	AA
P701	QPLGN1178GEZZ	J Plug, 11Pin	AC
P751	QPLGN0155FJZZ	J Plug, 3Pin	AE
P752	QPLGN0155FJZZ	J Plug, 3Pin	AE
P2002	QPLGN1320REZZ	J Plug, 13Pin	AC
P2003	QPLGN0520REZZ	J Plug, 5Pin	AB
P2004	QPLGN0420REZZ	J Plug, 4Pin	AA
SC401	QSOCN0464FJZZ	J Socket, 50Pin	AH
SC1201	QSOCN0461FJZZ	J Socket, 53Pin	AH
SC1203	QSOCN0199FJZZ	J Socket, 20Pin	AE
SC4401	QSOCN0487FJZZ	J Socket, 20Pin	AE

**DUNTKA315DE01
SWITCH PWB UNIT****DIODES**

D4009	RH-EX0879CEZZ	J Zener Diode	AD
D4010	RH-EX0879CEZZ	J Zener Diode	AD
D4018	RH-EX1283CEZZ	J Zener Diode	AB
D4019	RH-EX1283CEZZ	J Zener Diode	AB

CAPACITORS

C4001	VCCCCY1HH471J	J 470p 50V Ceramic	AA
C4002	VCCCCY1HH471J	J 470p 50V Ceramic	AA

Ref. No.	Part No.	★	Description	Code
DUNTKA315DE01 SWITCH PWB UNIT(Continued)				
RESISTORS				
R4005	VRS-CY1JF123J	J 12k	1/16W Metal Oxide	AA
R4006	VRS-CY1JF822J	J 8.2k	1/16W Metal Oxide	AA
R4011	VRS-CY1JF123J	J 12k	1/16W Metal Oxide	AA
R4012	VRS-CY1JF822J	J 8.2k	1/16W Metal Oxide	AA
SWITCHES				
SW4002	QSW-K0087GEZZ	J Switch, CH▼		AC
SW4003	QSW-K0087GEZZ	J Switch, CH▲		AC
SW4004	QSW-K0087GEZZ	J Switch, Menu		AC
SW4006	QSW-K0087GEZZ	J Switch, TV/Video		AC
SW4007	QSW-K0087GEZZ	J Switch, Vol(+)		AC
SW4008	QSW-K0087GEZZ	J Switch, Vol(-)		AC
S4701	QSW-S0213CEZZ	J Switch, Main Power		AE
MISCELLANEOUS PART				
P4004	QPLGN0564TAZZ	J Plug, 5Pin		AC


DUNTKA316DE01 R/C PWB UNIT				
TRANSISTORS				
Q4106	VSDTC144EE/-1	J DTC144EE		AA
Q4107	VSUMG4/////1	J UMG4		AC
DIODES AND LED				
D4120	RH-EX1271CEZZ	J Zener Diode		AB
D4121	RH-EX1271CEZZ	J Zener Diode		AB
D4122	RH-PX0368CEZZ	J PhotoDiode		AE
CAPACITOR				
C4120	VCKYTV1CF105Z	J 1	16V Ceramic	AB
RESISTORS				
R4187	VRS-CY1JF331J	J 330	1/16W Metal Oxide	AA
R4188	VRS-CY1JF102J	J 1k	1/16W Metal Oxide	AA
R4189	VRS-CY1JF472J	J 4.7k	1/16W Metal Oxide	AA
R4190	VRS-CY1JF101J	J 100	1/16W Metal Oxide	AA
MISCELLANEOUS PARTS				
	PSLDM4646CEFW	J Shield		AC
RMC4101	RRMCU0239CEZZ	J Remote Receiver		AG
SC4102	QPLGN0464TAZZ	J Plug, 4Pin		AC

Ref. No.	Part No.	★	Description	Code
SUPPLIED ACCESSORIES				
⚠	LHLDW1028GEZZ	J	Cable Clamp	AB
	QACCK0002TAZZ	J	AC Cord(LC-15A2E)	AM
	QACCB0016TAZZ	J	AC Cord(LC-15A2E(K))	AV
	RRMCG1621CESA	J	Remote Control	AU
	SSAKA0160CEZZ	J	Operation Manual Polyethylene Bag	AB
⚠	TiNS-7213CEZZ	J	Operation Manual	AY
	UADP-0210CEZZ	J	AC Adapter	BH


PACKING PARTS (NOT REPLACEMENT ITEM)				
	SPAKC5481CEZZ	-	Packing Case	—
	SPAKF0405CEZZ	-	Packing Material	—
	SPAKF0473CEZZ	-	Pat	—
	SPAKP0893CEZZ	-	Wrapping Paper	—
	SPAKX2903CEZZ	-	Buffer Material	—
	TLABK0001TAZZ	-	No. Label	—
	TLABN0157CEZZ	-	Barcode Label	—

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
CABINET PARTS LIST					36	XEBSD26P06000	J	Screw	AA
1	CCABA2402CE03	J	Cabinet A Ass'y	BF	37	XEBSD30P08000	J	Screw	AA
1-1	—	—	Cabinet A	—	38	XEBSF30P12000	J	Screw	AA
1-2	GCOVA1932CESA	J	IR Filter	AC	39	XEPSN30P14000	J	Screw	AA
1-3	GCOVA1857CESA	J	LED Cover	AD	40	LANGF0106CEFW	J	Reinforcing Metal	AF
1-4	GCOVA1914CESA	J	R/C Receptor Cover	AF	41	XBBS030P04000	J	Screw	AA
1-5	HBDGB3154CESA	J	SHARP Badge	AF	43	QCNW-5812CEZZ	J	Terminal FFC	AH
1-6	LANGS0130CEFW	J	Speaker Fixing Metal	AD	44	QCNW-5556CEZZ	J	RC/LED Cable	AE
1-7	PSLDC3104CEZZ	J	Copper Film Sheet	AC	45	QCNW-5813CEZZ	J	Operate Cable	AG
1-8	PSLDC3105CEZZ	J	Receptor Copper Film Sheet	AC	46	QCNW-5814CEZZ	J	Power Cable	AK
1-9	PSPAH0654CE00	J	SP Spacer	AC	47	HINDP5670CESA	J	Model Indicator Plate	AE
1-10	PSPAP0055CEZZ	J	Receptor Spacer	AB	48	QPWBHA141CEZZ	J	Source FPC	AR
1-11	VSP4030P-44YD	J	Speaker	AR	49	QCNW-5801CEZZ	J	Connecting Cord	AG
1-12	XEBSD20P05000	J	Screw	AA	50	QERAZ0028CEZZ	J	Gasket	AE
2	CCABB2298CE01	J	Cabinet B Ass'y	BE					
2-1	—	—	Cabinet B	—					
2-3	HINDP5669CESA	J	Terminal Indicator Plate	AG					
2-4	JBTN-2047CEKA	J	Operating Button	AF					
2-5	LANGF9601CEFW	J	Reinforcement Metal	AK					
2-6	LX-BZ3426CEFN	J	Screw	AA					
2-7	LX-HZ3064CEFF	J	Screw	AA					
2-8	PSLDC3106CEZZ	J	Copper Film Sheet	AC					
2-10	PSPAG0364CEZZ	J	Spacer	AC					
2-11	QEARZ0022CEZZ	J	Earth Gasket	AE					
2-12	RSP-Z0114CEN1	J	Speaker	AR					
2-13	LX-BZ3425CEFN	J	Screw	AA					
2-14	PSPAG0370CEZZ	J	Spacer	AB					
2-15	XEPSN30P08000	J	Screw	AA					
3	—	—	Stand Ass'y	—					
3-1	GCOVA1853CESA	J	Hinge Cover	AH					
3-2	GCOVA1854CESA	J	Rotation Cover	AQ					
3-3	GCOVH9302CEZZ	J	Protection Cover	AE					
3-4	GCOVH9303CE00	J	Leg Cover	AD					
3-5	GDAI-1113CESA	J	Rotation Base	AL					
3-6	LANGF9549CE00	J	Reinforcing Metal	AS					
3-7	LANGF9550CE00	J	Reinforcing Metal	AP					
3-8	LX-HZ3112CEFD	J	Screw	AA					
3-9	MHNG-3026CE01	J	Torque Hinge	BC					
3-10	XBPSD40P07000	J	Screw	AA					
3-11	XBPSF40P04000	J	Screw	AA					
3-12	XESSF30P08000	J	Screw	AA					
△ 4	KLMP-0098CEZZ	J	Lamp Unit	BA					
5	LANGQ9208CEFW	J	ITO Sheet Angle	AE					
6	LHLDZ2145CEKZ	J	Light Guide Sheet Holder	AU					
7	PGIDM0060CEZZ	J	Light Guide Sheet	AZ					
8	PSHEP0207CEZZ	J	ITO Sheet	AX					
9	PSHEP0220CEZZ	J	Wave Sheet	AY					
10	PSHEP0208CEZZ	J	Diffusion Sheet	AP					
11	PSHEP0209CEZZ	J	Polarising Sheet	BG					
12	PSHEP0210CEZZ	J	Reflection Panel	AL					
13	PSHEP0217CEZZ	J	Reflection Sheet	AL					
14	PSLDM4504CEZZ	J	Copper Film Shield	AC					
15	PSLDM4505CEZZ	J	Copper Film Shield	AC					
16	PSLDM4604CEFW	J	Panel Shield Plate	AN					
17	PSPAZ0364CEZZ	J	Panel Spacer	AB					
18	PSPAZ0365CEZZ	J	Panel Spacer	AB					
19	PSPAZ0368CEZZ	J	Spacer	AD					
20	PSPAZ0367CEZZ	J	Spacer	AD					
21	PSPAZ0377CEZZ	J	Both Side Tape	AD					
22	QCNW-4941CEZZ	J	Gate FFC	AE					
23	RLCDT0058CEZZ	J	LCD Unit	DQ					
24	XBBS020P05000	J	Screw	AA					
25	XEBSD30P08000	J	Screw	AA					
26	PSLDM4450CEFW	J	Receptor Shield Plate	AE					
27	LHLDW1046CEZZ	J	Wire Clamp	AA					
28	GCOVA1922CEKA	J	Terminal Cover	AL					
29	JKNBP1167CEKA	J	Power Knob	AE					
30	LHLDW1173CEZZ	J	Wire Clamp	AD					
32	PSLDM4482CEFW	J	Source FPC Shield Plate	AD					
33	PZETZ0019CEZZ	J	Insulator	AE					
34	TLABN0276CEZZ	J	No. Label(LC-15A2E)	AD					
34	TLABN0277CEZZ	J	No. Label(LC-15A2E(K))	AE					
35	LX-BZ3431CEFN	J	Screw	AB					

CABINET AND MECHANICAL PARTS

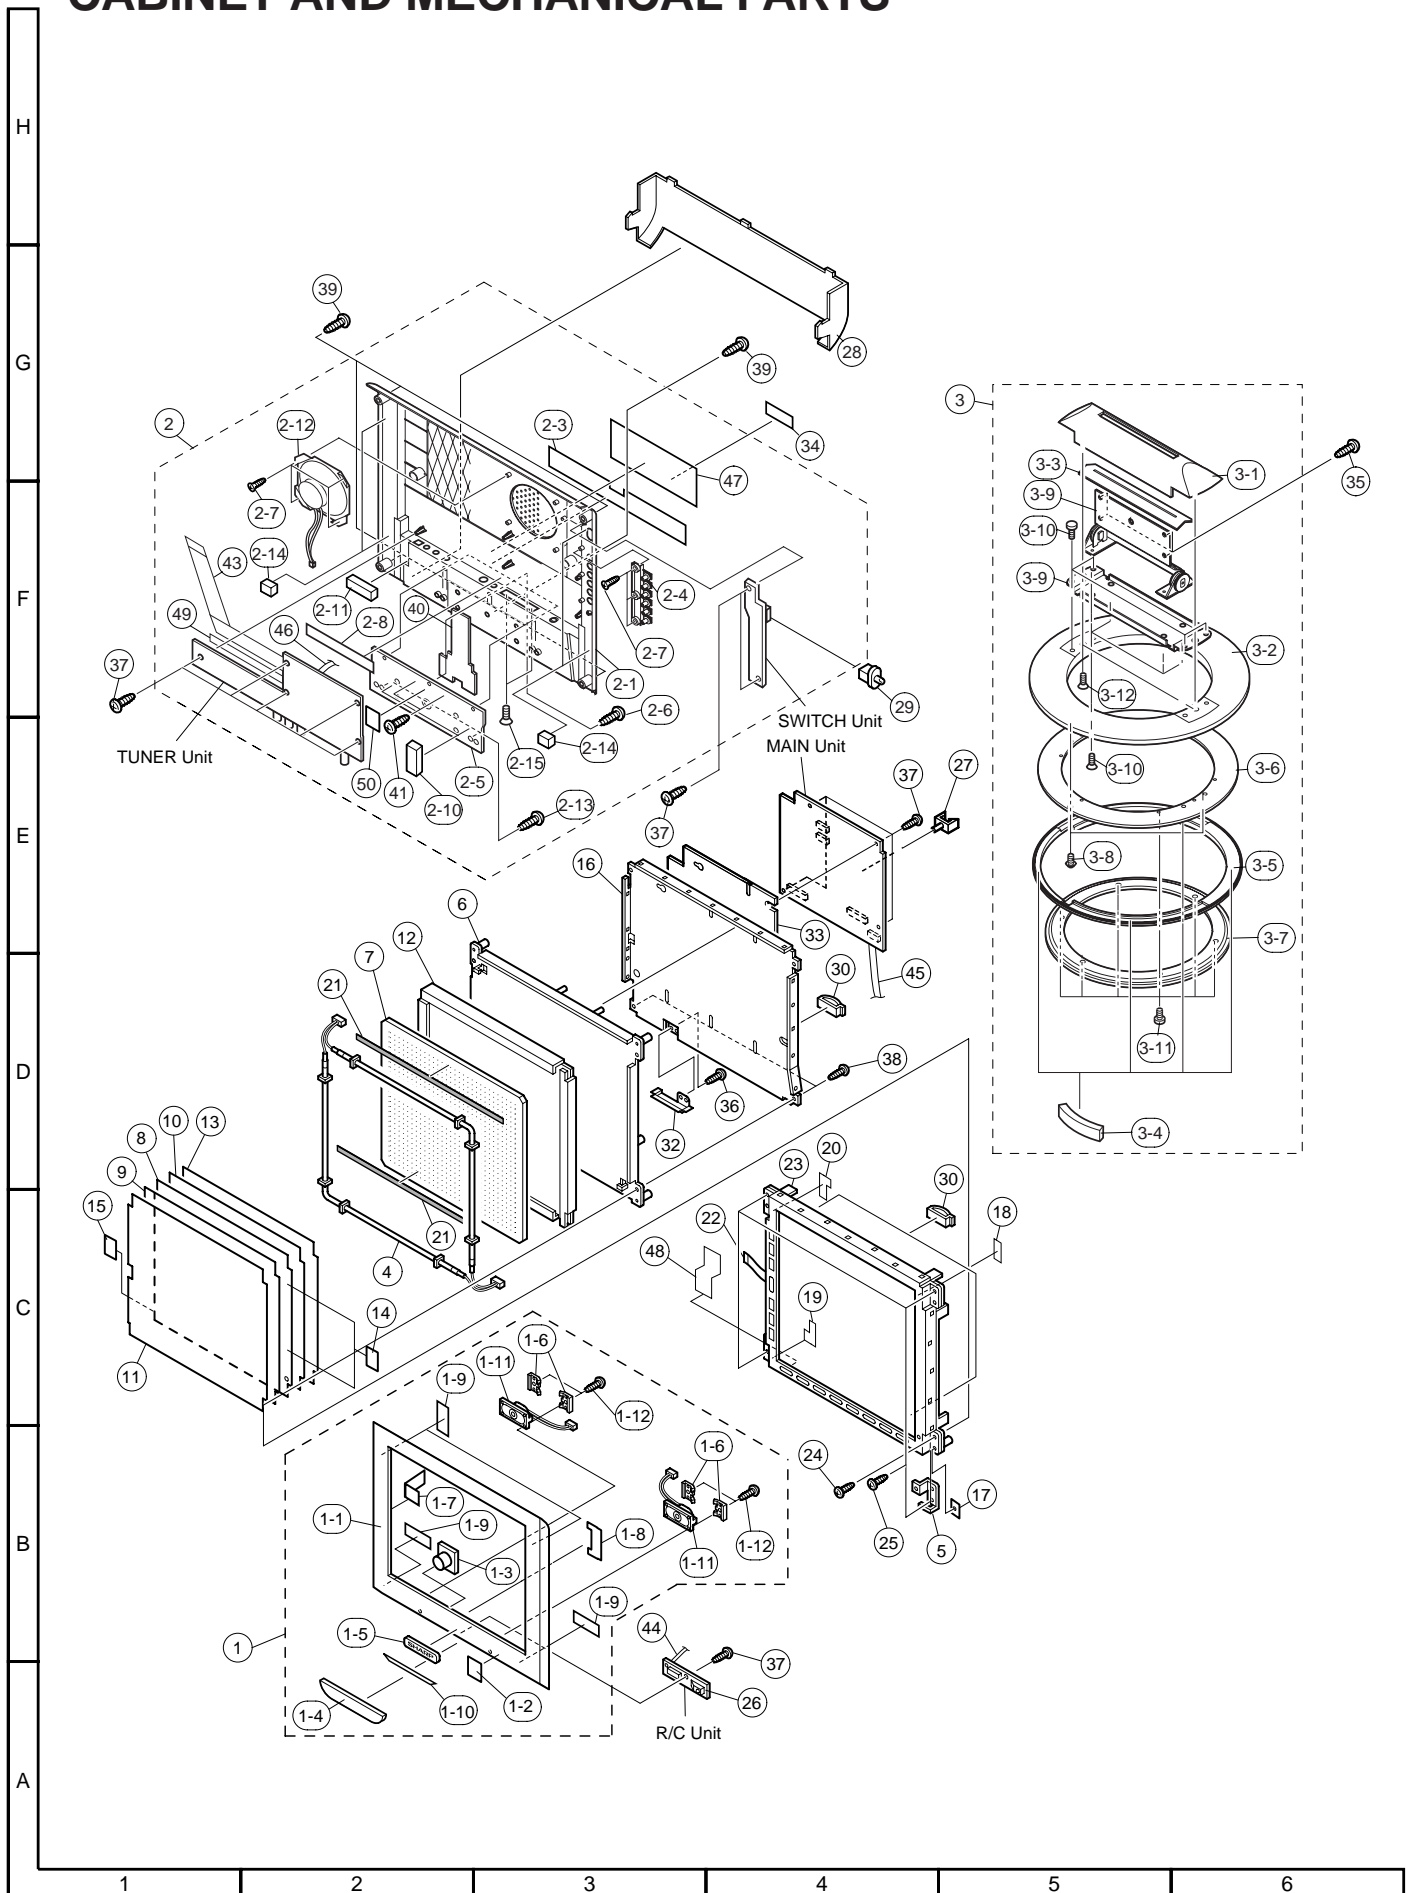

PACKING OF THE SET

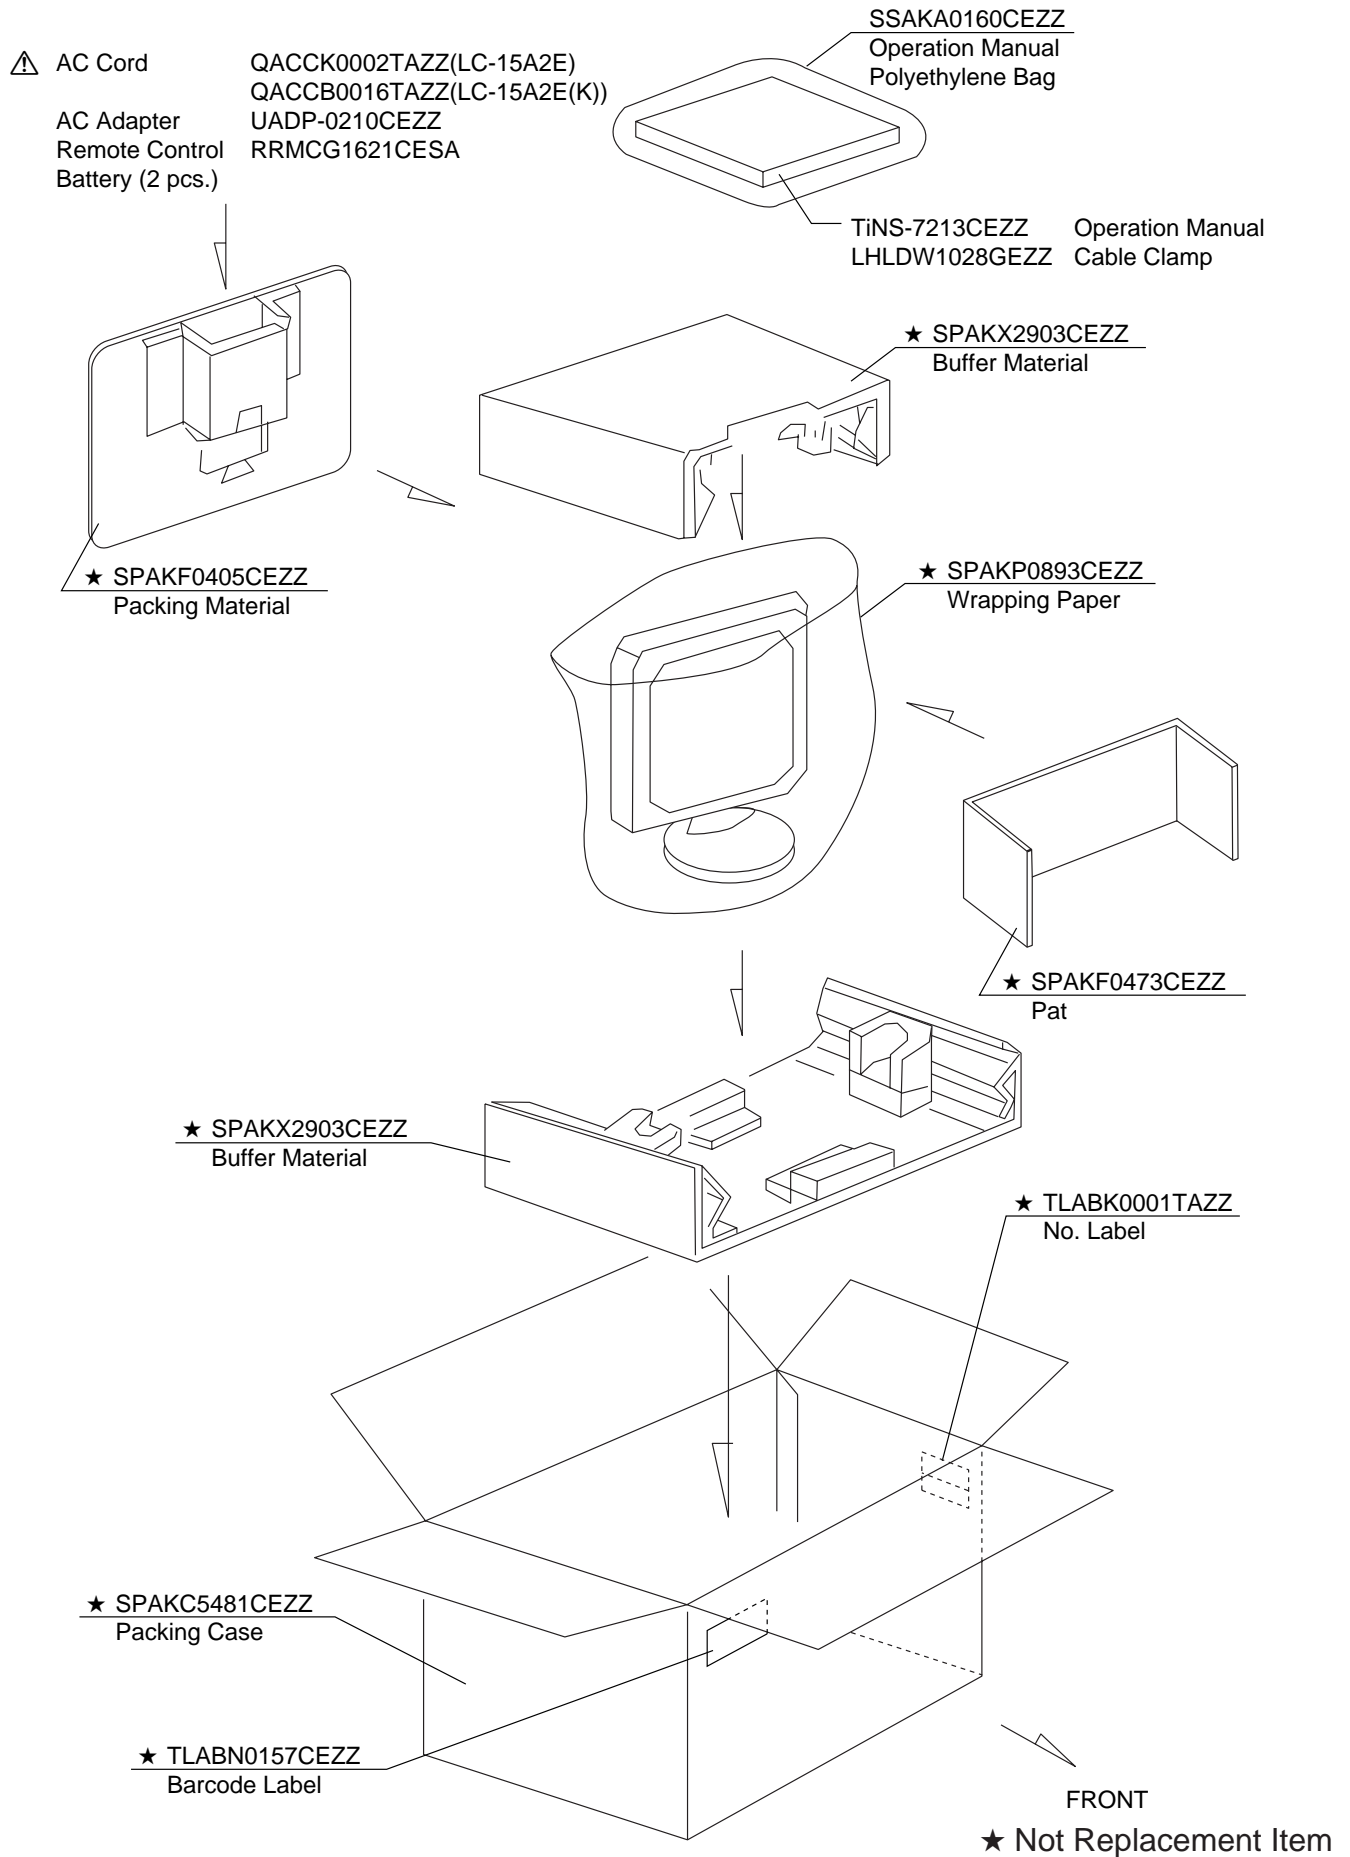

SHARP

COPYRIGHT © 2000 BY SHARP CORPORATION

ALL RIGHTS RESERVED.

No part of this publication may be reproduced,
stored in a retrieval system, or transmitted in
any form or by any means, electronic, mechanical,
photocopying, recording, or otherwise, without
prior written permission of the publisher.